
ASSEMBLY AND INSTALLATION INSTRUCTIONS

OW24963 / OW35653 / OW35053

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

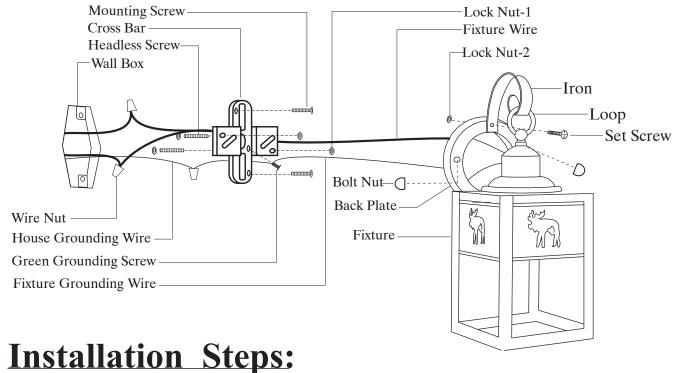

- 1. Thread two headless screws to the cross bar, and then secure with four lock nuts-1.(You can adjust the length of the screws if necessary.)
- 2. Attach the cross bar to the wall box by using two mounting screws.
- 3. Hook the iron to the loop, and then attach the iron to the back plate by using the set screw and the lock nut-2.
- 4. Make wire connections with Wire Nut:
 - --- The black wire from fixture to the black wire from power source.
 - --- The white wire from fixture to the white wire from power source.
 - ---Attach the fixture grounding wire to the cross bar with the green grounding screw. Then connect it to the house grounding wire with the wire nut.
 - Carefully tuck wires back into the wall box.
- 5. Attach the back plate to the cross bar by inserting the headless screws, and then secure with the bolt nuts.
- 6. Install a bulb. (Please do not exceed the maximum capacity that is recommended on the package.)
- 7. Turn on the power at fuse or circuit box.

