FLOOD - model: WP-LED3

Endurance Wallpack

WAC LIGHTING

Responsible Lighting®



SPECIFICATIONS

Construction: Die-cast aluminum Power: Line Voltage input (120V)

Fixture Type:

Project:

Location:

Catalog Number:

Dimming: 100% - 10% with Electronic Low Voltage (ELV) dimmer

Finish: Powder coated Bronze and White


Standards: Energy Star®, IP66, Wet Location, ETL & cETL Listed

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire

FEATURES

- Factory-Sealed LED Light Engine
- 360° Horizontal Rotation, 90° Vertical Aiming
- Photo/Motion Sensor Compatible (Sold Separately)
- Suitable to install in all directions
- 120V Direct Wire No Driver Needed
- Smooth and Continuous ELV Dimming
- 85 CRI
- 60,000 hour rated life

PHOTOMETRY

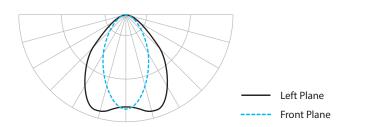

ORDER NUMBER

	Power	Comparable	Delivere 3000K	ed Lumens 5000K	Color Temp		Finish		
WP-LED335	35W	100W HID	1945	2070	30 50	3000K 5000K	BZ WT	Bronze White	

Example: WP-LED336-30-BZ

ACCESSORIES



Photo Sensor

PC-120-BZ PC-120-GY PC-120-WT Bronze Gray White

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585