WALL WASH - 3020W

Monopoint Luminaire



Responsible Lighting®




Fixture Type:

Catalog Number:

Project:

Location:



PRODUCT DESCRIPTION

LED luminaire with optimum light distribution for wall wash application

FEATURES

- 350° horizontal rotation and 90° vertical aiming
- · Ceiling and wall mountable
- · Integral LED and driver
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum **Input:** 120-277V AC 50/60Hz

Power Consumption: 20W

Light Source: High output LED

Dimming: Electronic Low Voltage (ELV) 100% - 5% (120V only)

Finish: Powder coated

Standards: UL & cUL Listed, Damp location listed,

Title 24 Compliant


ORDER NUMBER


System	Model	Color Temp	CRI	Lumens	Finish
MO Monopoint	3020W	930 <i>3000K</i>	90	925	BK Black WT White

MO-3020W-930-

Example: MO-3020W-930-BK

LAYOUT GUIDE

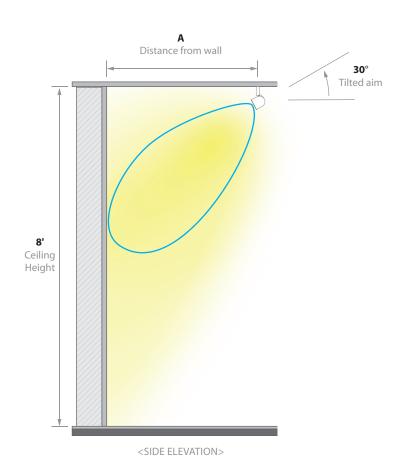

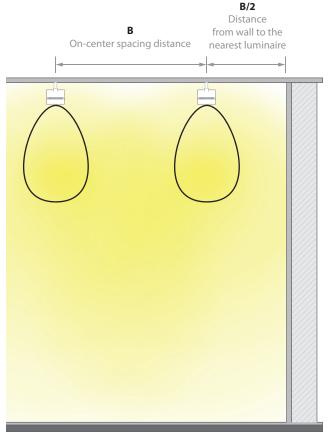

<BACK ELEVATION>

AVERAGE WALL ILLUMINANCE

		B On-center spacing distance		
		3 feet	5 feet	
A Distance from wall	3 feet	31 fc	25 fc	
	5 feet	20 fc	16 fc	

Results may vary depending on surface properties, ambient light levels, etc.

PHOTOMETRY

Shown when fixture is aimed towards the ground(nadir)

