
HR-D417

4" Low Voltage Downlight Trim

WAC LIGHTING

Responsible Lighting®

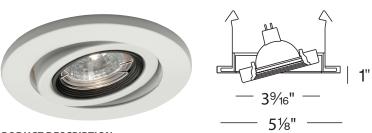

PRODUCT DESCRIPTION

Adjustable gimbal ring trim with dual pin axis. For use with HR-8400 series low voltage housings.

FEATURES

- · Gimbal ring, 25° adjustment from vertical recessed downlight
- Center lamp holder allows lamp to be tilted up to 25° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Handles surfaces up to 3/4" thick
- 5 year WAC Lighting product warranty

Fixture Type:
Catalog Number:
Project:
Location:

SPECIFICATIONS

Construction: Durable die-cast aluminum construction. Three heavy gauge retention clips firmly hold trim to housing.

Lamp: Accommodates most 12V LED MR16 or Halogen MR16 lamps (50W max).

Finish: Abrasion resistant powder coat painted or plated metal finish. Available in Brushed Nickel (BN) and White (WT).

Standards: UL & CUL Listed, Suitable for damp locations

ORDER NUMBER

Model #	Finish			
HR-D417 (Order lamp separately) HR-D417LED (7W 450Im LED MR16 included)	BN WT	Brushed Nickel White		
Model # Fi	nish			

HR-D417	-	

Example: HR-D417LED-WT

ACCESSORIES	
	-

LENS-16- Color Lens	BLU Blue	Blue Green	LENS-16-UVF LENS-16-FR LENS-16-SPR LENS-16-BEL	UV Filter Frosted Lens Spread Lens Beam Elongating Lens
	YEL		LENS-16-HCL	Honeycomb Louver

4" Low Voltage Ho	usings (Required)		Model	Voltage	Transformer	Output	Installation	Rating
	4/4"	5%6" 81%6"	HR-8402E	120V	Electronic	12V, 50W max	New Construction	Non-IC
4½" 4½" 13%6"		HR-8401E	120V	Electronic	12V, 50W max	Remodel	Non-IC	

Non-IC housings require 3" of clearance from insulation on all sides. Accommodates ceiling thickness of up to 3" for remodel & 3" for new construction.