


# HR-LED431

## 4" LEDme® Shower Trim

# WAC LIGHTING

Responsible Lighting®

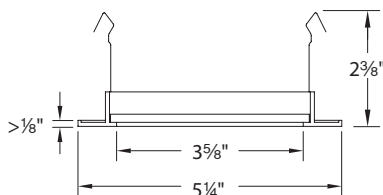

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Round recessed shower trim with interior woven lens.  
For use with HR-LED418 series housings.

### FEATURES

- Energy Star®
- Less than 1/8" thick, super low profile die-cast aluminum trim
- Recessed depth from LEDs to trim edge is 2 3/8"
- Narrow flood beam spread
- Woven lens creates comfortable diffused light at any angle
- Handles surfaces up to 3/4" thick
- 5 year WAC Lighting product warranty

### ORDER NUMBER

Model #	Finish	Trim
HR-LED431	CH	Chrome
	WT	White

### FINISHES


CH



WT



### PHOTOMETRY



Beam Angle: 31.4°

HR-LED431

-

Example: HR-LED431-WT

### COMPATIBLE HOUSINGS (ORDER SEPARATELY)

Rating	Model #	Installation	Color Temp		Watt	Lumens	CRI	Input	Current	Dimensions			Cutout	
IC-Rated	HR-LED418-NIC	New Conctruction	27	2700K	10.2W	639	85	120V 50/60Hz	450mA	L: 14½-24½"	W: 6¾"	H: 5½"	4¾"	
			30	3000K		639	85							
	HR-LED418-RIC	Remodel	35	3500K		681	80			L: 11⅞"	W: 6⅜"	H: 5⅝"	4¾"	
			40	4000K		815	75							
Non-IC	HR-LED418-N	New Conctruction	27	2700K	16W	846	85	120V 50/60Hz	700mA	L: 14½-24½"	W: 6¾"	H: 5½"	4¾"	
			30	3000K		846	85							
	HR-LED418-R	Remodel	35	3500K		901	80			L: 11⅞"	W: 6⅜"	H: 5⅝"	4¾"	
			40	4000K		1135	75							
Non-IC	HR-LED418-N	New Conctruction Emergency Backup Battery	27	2700K	EM	16W	846	85	120V 50/60Hz	700mA	L: 14½-24½"	W: 11⅞"	H: 5½"	4¾"
30	3000K	846	85											
35	3500K	901	80											
40	4000K	1135	75											

Example: HR-LED418-NIC-27 or HR-LED418-NIC-27-EM

See individual housing spec sheets for complete information.

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585