


<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**4" PREMIUM LINE VOLTAGE DOWNLIGHT TRIM**




**R4VT-22**

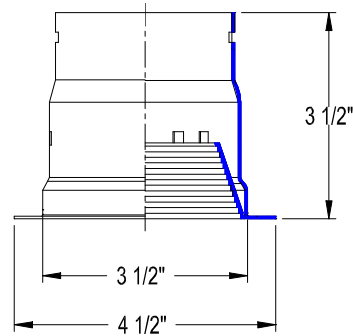


Ordering Matrix			
Series	Model Number	Finish	
R4VT	22	BK	WT

Ordering Example (series – model number – finish): R4VT-22-WT

Product Details		Specification Features	
<b>Application:</b>	Ceiling down light trim, 1-inch maximum ceiling thickness. Provides smooth broad area illumination without shadows. Used with incandescent or fluorescent lamp housings.	<ul style="list-style-type: none"> <li>Suitable for damp locations</li> <li>5 year WAC Lighting product warranty.</li> </ul>	
<b>Materials:</b>	One-piece spun aluminum construction. Integral trim ring is painted white, interior reflector is anodized aluminum. Trim is retained to socket via spring clips.		
<b>Finish:</b>	BK = Black baffle with White trim WT = White baffle with White trim		
<b>Ratings:</b>	UL & CUL listed.		

Compatible Housings (sold separately)					
<b>R4VI-B-ICA</b> Insulation Contact & Air Tight New Construction Incandescent <b>Lamp:</b> PAR16 45W PAR20 50W		<b>R4VI</b> Non IC Frame-In Style New Construction Incandescent <b>Lamp:</b> PAR16 50W R20 75W PAR20 50W		<b>R4VI-R</b> Non IC Remodeling Incandescent <b>Lamp:</b> PAR16 50W R20 75W PAR20 50W	

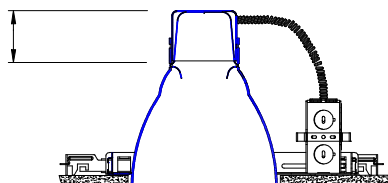

Socket cup adds a maximum of 2 1/8" to the height of the trim when used with frame in kits.