


CATALOG NUMBER	TYPE
PROJECT	

5" LINE VOLTAGE DOWNLIGHTS

R-522

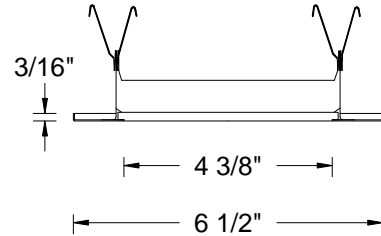

Ordering Matrix		
Series	Model	Finish(Trim)
[]	[]	[]
R	522	WT

Ordering Example (series – model number – finish): R-522-WT

Product Details	Specification Features
<p>Description: Wet location listed glass dome trim. Typical applications include bathrooms, saunas, workrooms and patios. For use with R-5XX series Line voltage downlights.</p> <p>Materials: Durable stamped metal construction. Lens is clear shaped glass. Secured within lamp housing by steel spring clips. Provided with foam rubber gasket around outer perimeter.</p> <p>Lamping Utilizes medium base incandescent or 4-pin CFL lamps. Incandescent lamps are rated for up to 75W watts max. Compact Fluorescent lamps are rated for 26 watts max. Lamps are ordered separately.</p> <p>Finish: Abrasion resistant powder coat painted or plated metal finish. Trim is available in white.</p> <p>Listing: UL & CUL Listed. Suitable for damp locations.</p>	<ul style="list-style-type: none"> • Handles surfaces up to 1" • 5 year W.A.C. Lighting product warranty.

Compatible Housings(Sold separately)

R-500-N-UA

Air tight.
New Construction
NON-IC rated: 40W A19



R-501-R-UA

Air tight.
Remodel housing.
NON-IC rated: 40W A19



R-F502-N-ICA

IC Rated. Air tight.
New Construction
13W Max. CFL



R-F503-R-ICA

IC Rated. Air tight.
Remodel housing
13W Max. CFL



R-F504-N-A

NON-IC Rated. Air tight.
New Construction
26W Max. CFL



R-F505-R-A

NON-IC Rated. Air tight.
Remodel housing
26W Max. CFL

