

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Tao

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W5312 12"	3000K 90	BZ Bronze	11W	830	220

Example: **WS-W5312-BZ**

•For 277V special order, add an "F" before the finish: WS-W5312F-BZ

For custom requests please contact customs@wacighting.com

DESCRIPTION

Architecturally harmonious form gravity cast from aluminum for structural durability. The architectural design features a sliver window of glass with an optical pattern for visual interest. Effective down lighting integrated for illuminating pathways. Wet Location listed and ADA Compliant for interior or exterior installations.

FEATURES

- Downlight adds functional path lighting
- Weather resistant powder coat finish
- Patterned crystal glass insert adds visual interest
- Gravity cast aluminum housing
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	80000 Hours
Standards:	ETL, cETL,IP65 Wet Location Listed
Construction:	Aluminum hardware with glass diffuser

REPLACEMENT PARTS

RPL-GLA-5312-01 - Inner glass for WS-W5312

RPL-GLA-5312-02 - Bottom glass for WS-W5312




FINISHES:



Bronze

LINE DRAWING:



WS-W5312

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Tao

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W5318 18"	3000K 90	BZ Bronze	15W	1218	250

Example: **WS-W5318-BZ**

•For 277V special order, add an "F" before the finish: WS-W5318F-BZ

For custom requests please contact customs@wacighting.com

DESCRIPTION

Architecturally harmonious form gravity cast from aluminum for structural durability. The architectural design features a sliver window of glass with an optical pattern for visual interest. Effective down lighting integrated for illuminating pathways. Wet Location listed and ADA Compliant for interior or exterior installations.

FEATURES

- Downlight adds functional path lighting
- Weather resistant powder coat finish
- Patterned crystal glass insert adds visual interest
- Gravity cast aluminum housing
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	80000 Hours
Standards:	ETL, cETL,IP65
	Wet Location Listed
Construction:	Aluminum hardware with glass diffuser

REPLACEMENT PARTS

RPL-GLA-5318-01 - Inner glass for WS-W5318

RPL-GLA-5318-02 - Bottom glass for WS-W5318




FINISHES:



Bronze

LINE DRAWING:

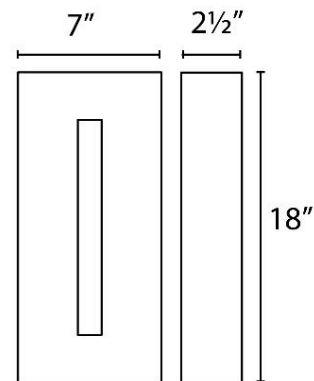

WS-W5318