


Powerbolt® 1000

Technical Information

Features


- Deadbolt Door Preparation: 2 1/8" (54.0mm) diameter door face hole, 1" (25.4mm) diameter deadbolt latch hole
- Entryset and Handleset Lower Door Preparation: 2 1/8" (54.0mm) diameter door face hole, 1" (25.4mm) diameter latch hole
- Automatic adjustment to door thickness of 1 3/8" (34.9mm) to 2" (50.8mm)
- Entryset and Handleset recommended center to center hole distance: 5 1/2" (139.7mm)
- Powerbolt Passage Entrysets and Handlesets are non-keyed
- 1" (25.4mm) projection deadbolt latch with 1/4" (6.4mm) diameter hardened steel free-turning roller
- Steel security strike with 3" (76.2mm) mounting screws standard
- Adjustable backset latches standard – 2 3/8" (60.3mm) to 2 3/4" (69.9mm)
- Lifetime Deadbolt Mechanism Warranty
- One Year Electrical Warranty
- Brilliance® Lifetime Anti-Tarnish Finish standard on Bright Brass (3) and Satin Chrome (26D) finish
- Some Powerbolt products require 4 new AA alkaline batteries
- Low battery indicator light

Functions

Number	Function and Description	Powerbolt
1460/1470	Single Cylinder Deadbolt: Deadbolt latch retracted by entering security code outside and extended by pushing lock button outside. Deadbolt latch extended and retracted by T-Turn on inside. Using key outside will retract deadbolt latch if needed. 1470: includes push button lock and unlock buttons on inside to extend or retract deadbolt.	

Product Dimensions

Product Dimensions	Inches			Metric (mm)		
Powerbolt Dimensions ▶	A	B	C	A	B	C
Powerbolt 1000 Outer Touchpad	2 7/8"	6 7/8"	1 5/32"	73.0	174.6	55
Powerbolt 1000 Inner Power Board	3 1/4"	9 13/16"	1 3/16"	82.5	240	30

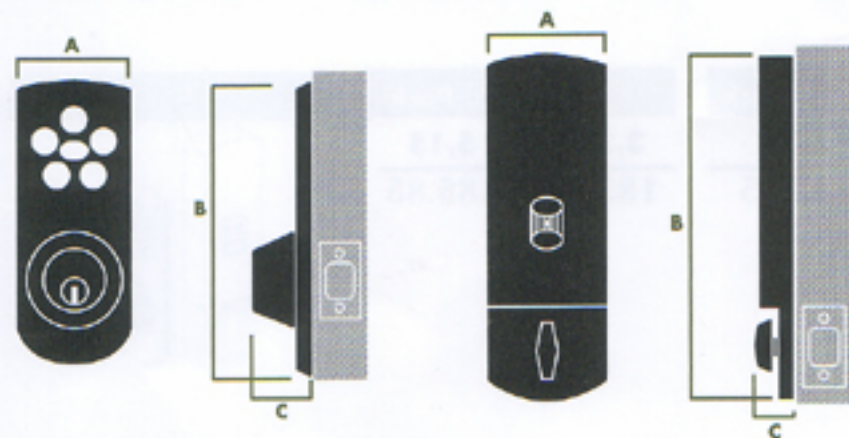

Powerbolt 1000
Outer Touchpad

Powerbolt 1000
Inner Touchpad