

NON-METERED COMMERCIAL DRYERS



Featuring Mechanical Controls




FOR YOUR CUSTOMERS

- Large Capacity is Ideal for Family-Size Loads
- Increased Capacity Allows Large Loads to Tumble and Spread, Reducing Dry Time
- 3 Cycle Options: Heavy Duty, Normal and Delicates
- 180°-Wide-Opening Side-Swing Door Allows for Convenient Access
- Ergonomic Control Knobs

SINGLE OPERATING THERMOSTAT

For simple accurate temperature control.

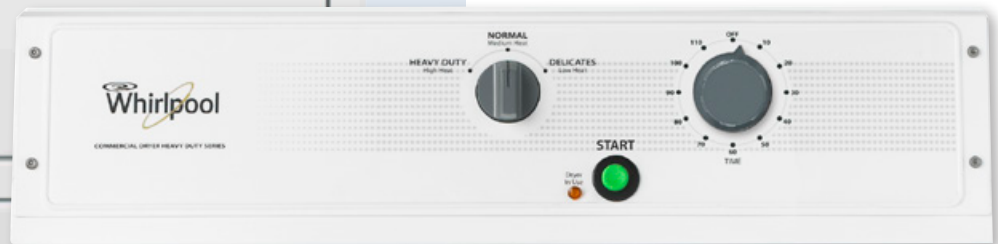

CEM2793BQ—27" Electric Dryer CGM2793BQ—27" Gas Dryer

- 7.4-Cu.-Ft. Drum Capacity
- Ergonomic Control Knobs
- 3 Cycles: Heavy Duty, Normal, Delicates
- 180°-Wide-Opening Reversible Side-Swing Door
- Powdered Paint Top and Lid, Rustproof Stainless Steel Torx® Screws For Increased Security
- Galvanized Heavy-Gauge Cabinet Back, Side and Front Panel
- Ball Bearing Idler Pulley
- 1/3 HP Motor
- Power Cord Sold Separately (Electric Model Only)
- Commercial Grade Blower Wheel
- **90-Day Labor/2-Year Limited Parts Only Warranty***

*Call 1-800-662-3587 for warranty details.

NON-METERED COMMERCIAL DRYERS



Featuring Mechanical Controls


Whirlpool® Non-Metered Commercial Dryers Mechanical Controls

DRYER SPECIFICATIONS		
MODELS	CEM2793BQ	CGM2793BQ
GENERAL INFORMATION		
Modern design and look with metal console and ergonomic control knobs.		
DRUM VOLUME	7.4 Cu. Ft.	7.4 Cu. Ft.
MOTOR	1/3 HP Single-Speed Motor with Built-In Overload Protector	1/3 HP Single-Speed Motor with Built-In Overload Protector
ELECTRICAL REQUIREMENTS	3-Wire Nominal 240/208 Volt, 60 Hz, A.C. Standard, 30-Amp Breaker/Fuse Circuit per Dryer (Subject to Local Codes)	120 Volt, 60 Hz, A.C. Standard, 15-Amp Breaker/Fuse Circuit per Dryer (Subject to Local Codes)
HEATER TYPE	Electric	Gas*
HEATER/BURNER RATING	Heater Rated at 5600 Watts	22,000 BTU Natural Gas
OPERATIONAL AMPERAGE	Motor—4.0 AMPS, No Load Heater—23.33 AMPS @ 240 Volt—27.33 Total	Motor—4.0 AMPS, No Load
SHIPPING WEIGHT (EST.)	152 lb. crated, 138 lb. uncrated	152 lb. crated, 138 lb. uncrated
DIMENSIONS		
Cabinet Width—in. (mm)	27 (686)	27 (686)
Cabinet Depth—in. (mm)	29.25 (743)	29.25 (743)
Cabinet Height—in. (mm) at Top of Metercase	40.8 (1036)	40.8 (1036)

*Burner orifices are available for manufactured, natural, mixed and LP gas with varying BTU ratings.




Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

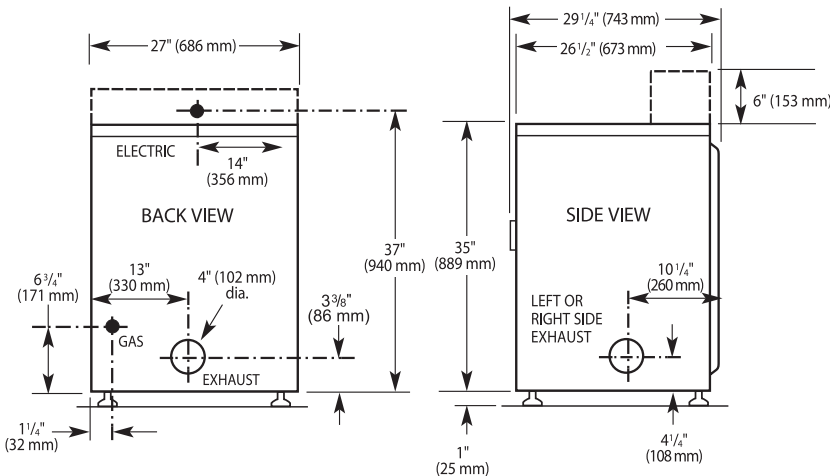

Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

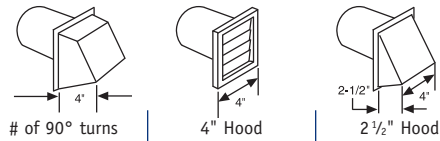

Maximum length of 4" diameter rigid metal duct		
# of 90° turns	4" Hood	2 1/2" Hood
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
Maximum length of 4" diameter flexible metal duct		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.



To Locate a Distributor Near You, Please Visit www.whirlpoolcommerciallaundry.com/distributor, or call 1-800-662-3587.