


DOUBLE OVEN GAS RANGES



FEATURING

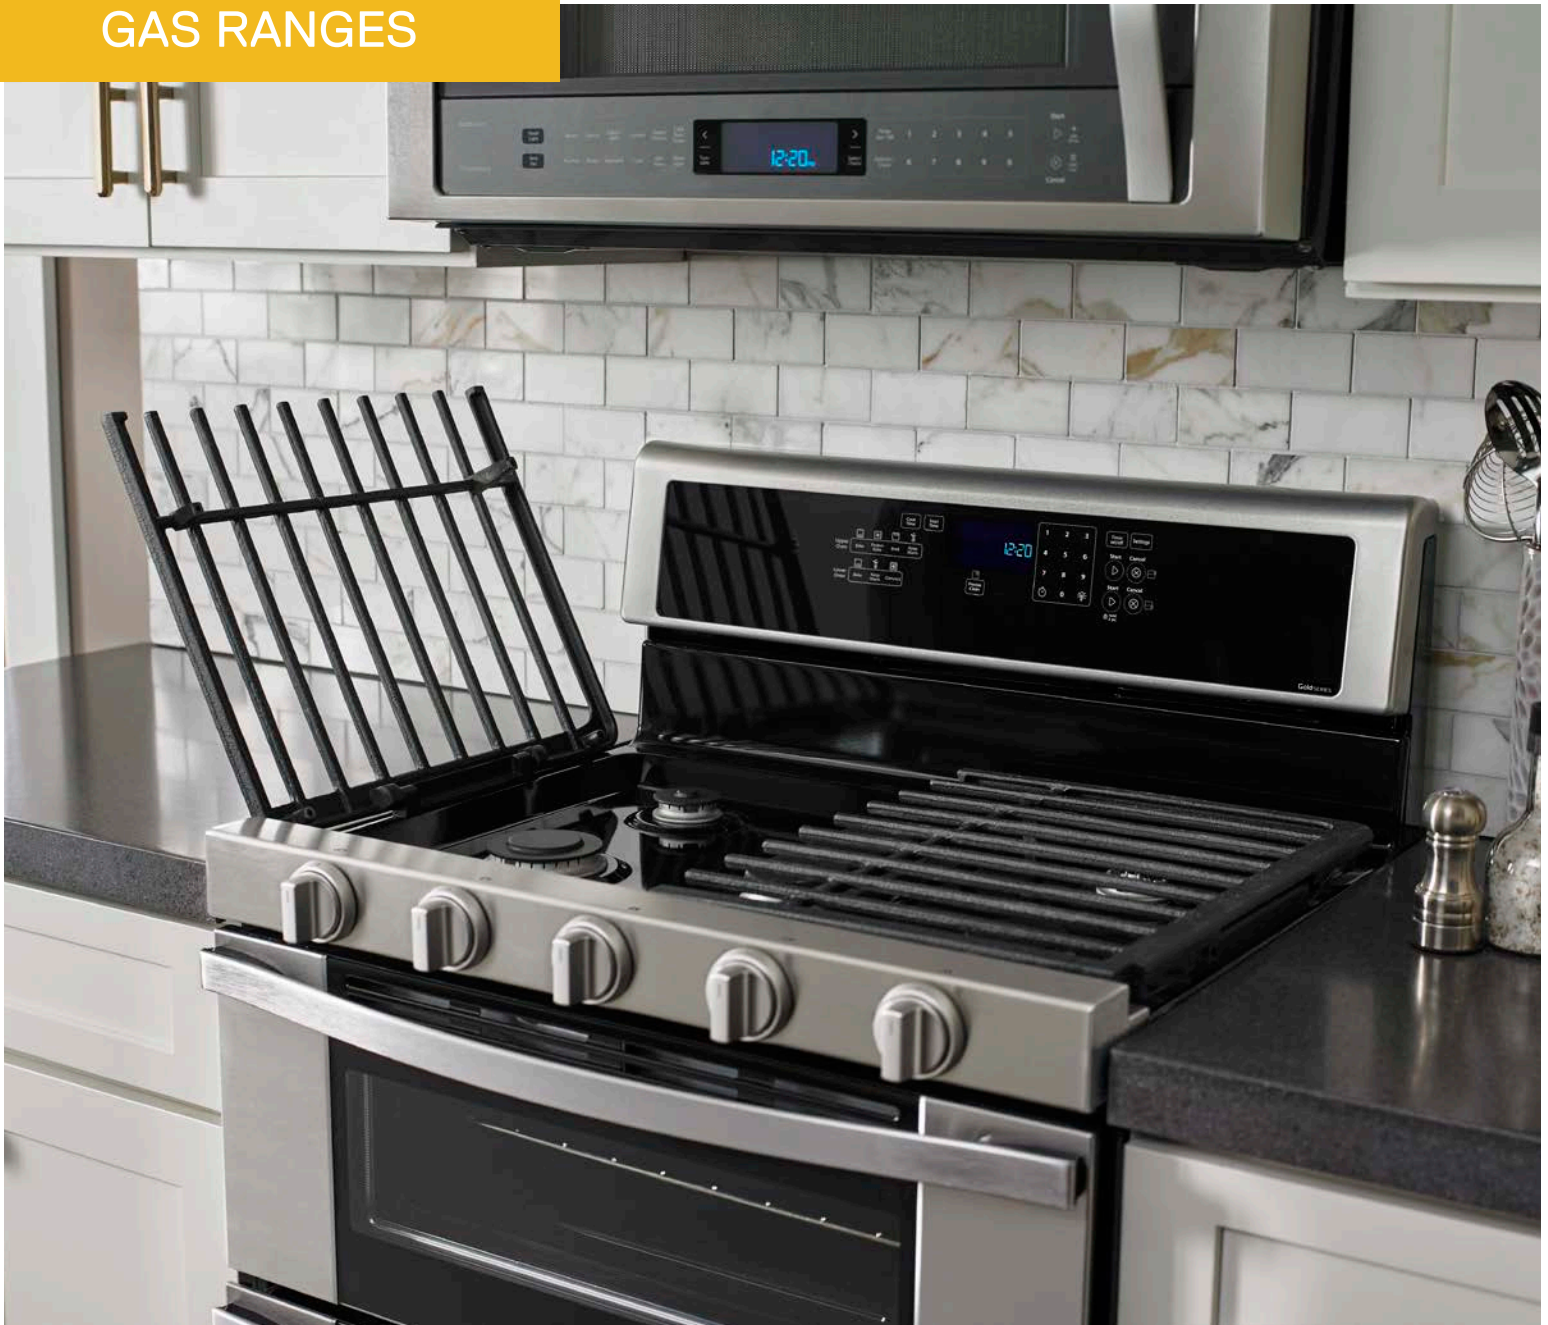

TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.*



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster** with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care.™

From the #1 Selling Appliance brand in the USA†

Double Oven Gas Ranges



WGG745SOF

NEW

30" Freestanding Range - 6.0 cu. ft.



TimeSaver™ system

- Frozen Bake™ Technology



HeatRight™ system

- True Convection
- Convection Conversion
- AccuSimmer® burner
- Center Oval burner
- Temperature Sensor



CompleteClean System

- EZ-2-Lift™ Hinged Grates
- Adjustable Self Cleaning
- Dishwasher-safe knobs



ReadySet™ system

- (2) SpeedHeat™ burners
- Rapid Preheat
- Keep Warm
- Delay Cook

Available colors



S
Stainless
Steel




H
White
Ice



E
Black
Ice

PRODUCT DIMENSIONS

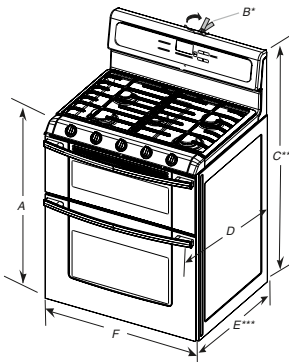

- A. 35 1/4" ± 1/4" (90.8 cm ± 0.3 cm) overall height (minimum) with leveling legs screwed all the way in*
- B. Model/serial/rating plates (located behind the control panel)
- C. 47 1/4" ± 1/4" (119.7 cm ± 0.3 cm) cooktop height (minimum) with leveling legs screwed all the way in†
- D. 28 1/2" ± 1/4" (72.4 cm ± 0.6 cm) depth with handle
- E. 26 1/2" ± 1/4" (66.4 cm ± 0.3 cm)**
- F. 29 1/2" ± 1/4" (76.0 cm ± 0.2 cm) width

- * Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- ** Model/serial/rating plates may be rotated up from behind the control panel for viewing from the front of the range.
- *** Excludes handle. Dimension given is from wall to front of oven door and will vary based on electric outlet receptacle installation.

ELECTRICAL REQUIREMENTS

IMPORTANT: The range must be electrically grounded in accordance with local codes and ordinances, or in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70 or Canadian Electrical Code, CSA C22.1. If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate.

- A 120 volt, 60 Hz., AC only, 15-amp fused, electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this range be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for: 25" (63.5 cm) countertop depth, 24" (61 cm) base cabinet depth, and 36" (91.4 cm) countertop height

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed with zero clearance to combustible construction at the rear and on the sides below the cooktop.

- A. 18" (45.7 cm) upper cabinet to countertop
- B. 13" (33.0 cm) upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to the top of the cooktop, see NOTE.
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of the range to the side wall or other combustible material.
- G. Cabinet door or hinges should not extend into the cutout.
- H. 3" (7.6 cm) distance from wall
- I. 1 1/2" (3.8 cm) min. from right side cabinet
- J. 8" (20.3 cm) width
- K. 7" (17.8 cm) min. from floor
- L. 2" (5.1 cm) min. from floor


* Drill on centerline 1 1/2" (3.1 cm) from rear wall for gas supply line.

** Gas lines must be installed within the shaded area to ensure proper alignment of this oven with cabinets.

*** Electrical plugs must be installed within the shaded area to ensure proper alignment of this oven with cabinets.

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

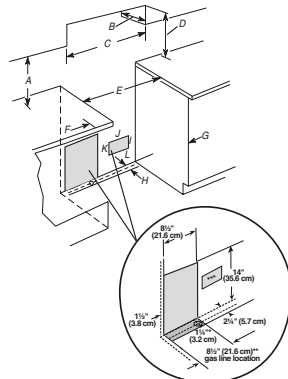

ACCESSORIES & REPLACEMENT PARTS

- Part number 8273888A Anti-Tip Kit for Range
- Part number 4378577 Brick Baking Stone
- Part number 4396923 Porcelain Broiler Pan & Grid
- Part number W10123240 Premium Broil Pan & Roasting Rack
- Part number 8009 Appliance Light Bulb - 40 Watt



*Compared to a traditional preheat and bake cycle for pizza, nuggets/fries, pies and lasagna. **Compared to thermal-bake cycle on the same model. †Based on 12-month average of unit sales. Refrigeration, Cooking, Dishwashers, and Laundry appliances. Traqline, 2014.