

# TEMPEST II wall

Designed with professional-grade performance and seamless contours, the wall-mount Tempest II gives you serious cooking power, with 650-CFM or 1200-CFM blower options. Equipped with dishwasher-safe, high-airflow baffle filters, a wireless remote control, 6-speeds, and dual-level halogen lighting, it's everything the demanding cook could ask for.




	INTERNAL BLOWER STANDARD	ACT™ INTERNAL BLOWER with AIRFLOW CONTROL TECHNOLOGY™	
Single Blower (Included), Min.-Max. CFM	200 - 650	Min.-Max. CFM	200 - 390      200 - 290
Single Blower (Included), Min.-Max. Sones	1 - 6	Min.-Max. Sones	1 - 4      1 - 3
Dual Blower (Optional), Min.-Max. CFM	400 - 1,200		
Dual Blower (Optional), Min.-Max. Sones	2 - 9		

*ACT™ is a feature built into Tempest II hoods with single internal blowers allowing you to limit the maximum blower CFM to meet local code requirements.*



Optional Remote Control

<b>SIZE</b>	
AK7500BS	30"
AK7536BS	36"
AK7548BS	48"
<b>PERFORMANCE</b>	
(INCLUDED) SINGLE INTERNAL BLOWER CFM	200 - 650
MIN.-MAX. SONES	1 - 6
(OPTIONAL) DUAL INTERNAL BLOWER CFM	400 - 1,200
MIN.-MAX. SONES	2 - 9
<b>COLOR</b>	
STAINLESS STEEL	SS
<b>FEATURES</b>	
CONTROLS	Electronic Touch
SPEED LEVELS	6*
AUTO DELAY-OFF	Yes
CLEAN AIR MODE	Yes
LIGHTING	
AK7500BS/AK7536BS	Halogen, 35W x 2
AK7548BS	Halogen, 35W x 4
DUAL LEVEL LIGHTING	Yes
FILTERS	
AK7500BS	SS Pro-Baffle x 2
AK7536BS	SS Pro-Baffle x 3
AK7548BS	SS Pro-Baffle x 4
WIRELESS REMOTE CONTROL OPTION	Yes
DUAL INTERNAL BLOWER OPTION	Yes
RECIRCULATING OPTION**	
AK7500BS/AK7536BS	Yes, Single Blower Only
AK7548BS	NA
<b>DUCT SPECIFICATIONS</b>	
SINGLE INTERNAL BLOWER - VERTICAL	8" Round
SINGLE INTERNAL BLOWER - HORIZONTAL†	3-1/4" x 10" or 8" Round
DUAL INTERNAL BLOWER - VERTICAL	10" Round
DUAL INTERNAL BLOWER - HORIZONTAL	10" Round
<b>AC POWER</b>	
SINGLE INTERNAL BLOWER	
AK7500BS/AK7536BS	120V, 60Hz at Max. 4A
AK7548BS	120V, 60Hz at Max. 4.6A
DUAL INTERNAL BLOWER	
AK7500BS/AK7536BS	120V, 60Hz at Max. 7.4A
AK7548BS	120V, 60Hz at Max. 8A
<b>OPTIONAL ACCESSORIES</b>	
12" DUCT COVER	
AK7500BS	AK0720
AK7536BS	AK0726
AK7548BS	AK0728
WIRELESS REMOTE CONTROL	14000005
DUAL INTERNAL BLOWER KIT	PBD-1200A
RECIRCULATING KIT**	
AK7500BS	ZRC-7000B
AK7536BS	ZRC-7036B
AK7548BS	NA
BACKSPLASH WITH SHELVES	
AK7500BS	AK0710
AK7536BS	AK0716
AK7548BS	AK0712
MAKE-UP AIR KIT, SINGLE BLOWER	MUA008A
MAKE-UP AIR KIT, DUAL BLOWER	MUA010A
<b>MOUNTING HEIGHT**</b>	
	26" - 36"
<b>WARRANTY</b>	
	3 Years Parts, 1 Year Labor

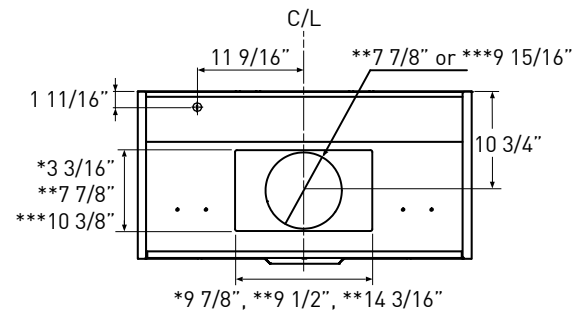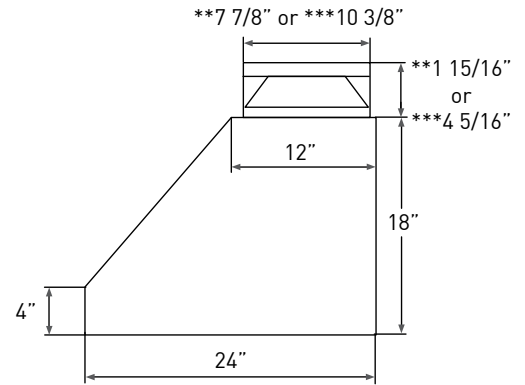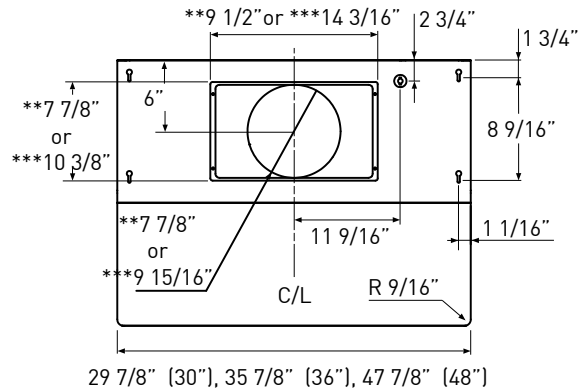

\* Single Blower Rect. Ducting Dimension  
\*\* Single Blower Round Ducting Dimension  
\*\*\* Dual Blower Dimension

Specifications subject to change, check zephyronline.com for up-to-date information.

\*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

\*\*Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†If horizontally ducting via 3-1/4" x 10", the maximum airflow of 650 CFM will be reduced to 550 CFM.

\*\*Mounting height refers to distance between top of cooking surface and bottom of hood.