




TEMP-GARD STD INSTITUTIONAL SHOWER HEAD

Z7000-i2

TAG _____

ENGINEERING SPECIFICATIONS: Bronze body with hard chrome plated finish, maximum flow rate 2.5 GPM at 80 PSI, with variable flow orifice feature to maintain constant flow rate, fixed stream head, 1/2" NPT female threaded inlet, 4 mounting screws provided, vandal resistant standard, 30 degree shower head angle as standard.

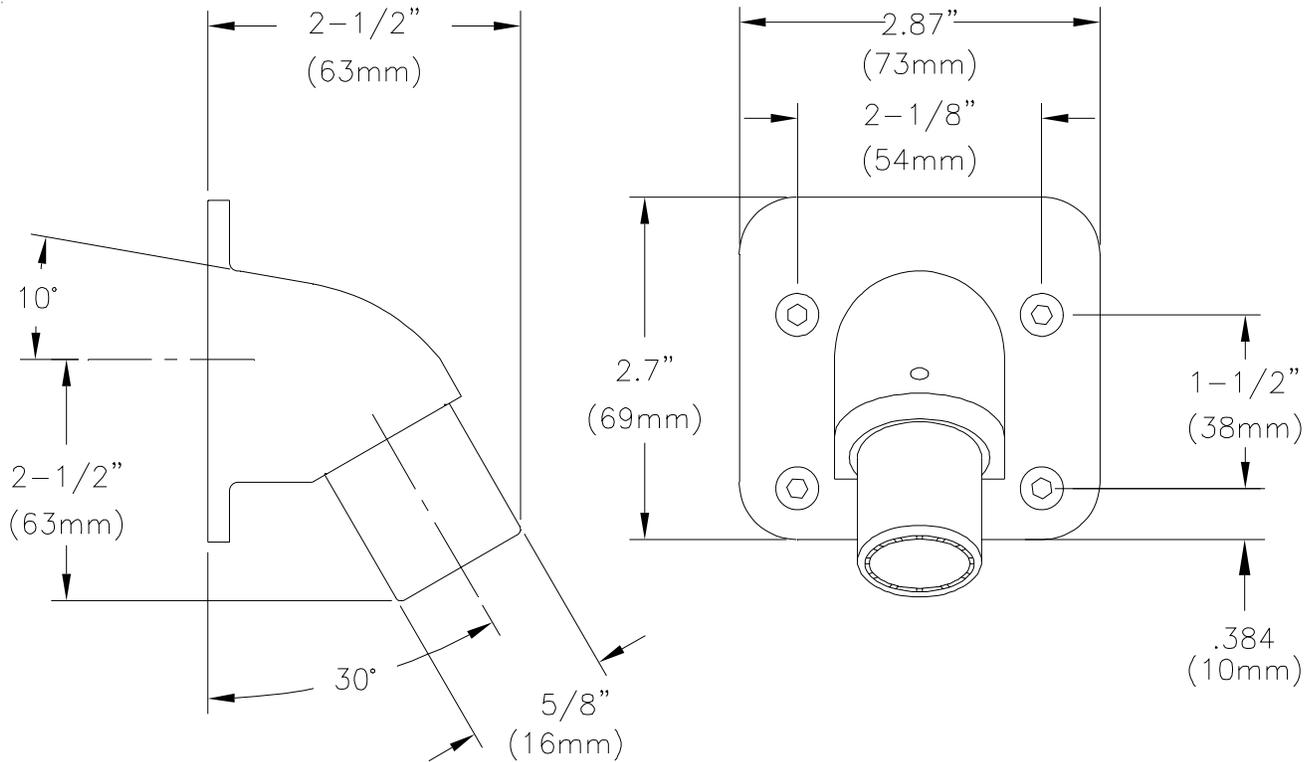

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Description
__ AP	Anchor Plate
__ BP	Base Plate

STANDARDS

Designed to meet the following standards:
ASME A112.18.1/CSA B125.1

ZURN INDUSTRIES LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292