



Z5580

1.6 gpf Pressure Assist Elongated Floor Mounted, Back Outlet Water Closet

TAG _____



Z5580 Series

- 1.6 gpf (gallons per flush)
- Vitreous china
- Pressure assisted tank
- High performance EcoFlush™ technology
- Easy touch handle actuation
- Ultra quiet flush
- Siphon jet flush action
- 4-1/8" back outlet rough-in
- 2-1/8" fully glazed trapway
- Operating pressure range 20-125 psi
- Elongated front rim
- Chrome plated handle
- Large water surface area
- Includes bolt caps
- Shipping weight: 92 lbs.

Z5580

Suffix Options:

___ -RH Vitreous China right-hand lever tank

Please Note: HET 1.0 gpf and HET dual flush 1.6 gpf/ 1.0 gpf pressure assist tanks also available. See Models Z5581 and Z5582.

Recommended Trim:

Z5958SS-EL

Elongated, white, closed front toilet seat with cover & stainless steel check hinge.

Z8800-CR

Standard stop with flexible closet riser.

Engineering Specification:

- Z5580** Vitreous china, 1.6 gpf / 6 Lpf, High Performance Pressure Assisted, Elongated Two Piece Toilet with 4-1/8" back outlet Rough-in.

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2-2003 and CAN/CSA B45 requirements.

This space is for Architectural/engineering Approval

See Zurn One Systems for suggested packages.


Zurn Plumbing Products Group Commercial Brass and Fixtures Operation
2640 South Work Street · Falconer, NY 14733 · Phone: 716-665-1132 · Fax: 716-665-1135 · www.zurn.com



Z5580

1.6 gpf Pressure Assist Elongated Floor Mounted, Back Outlet Water Closet TAG _____

Rough-in dimensions for Z5580

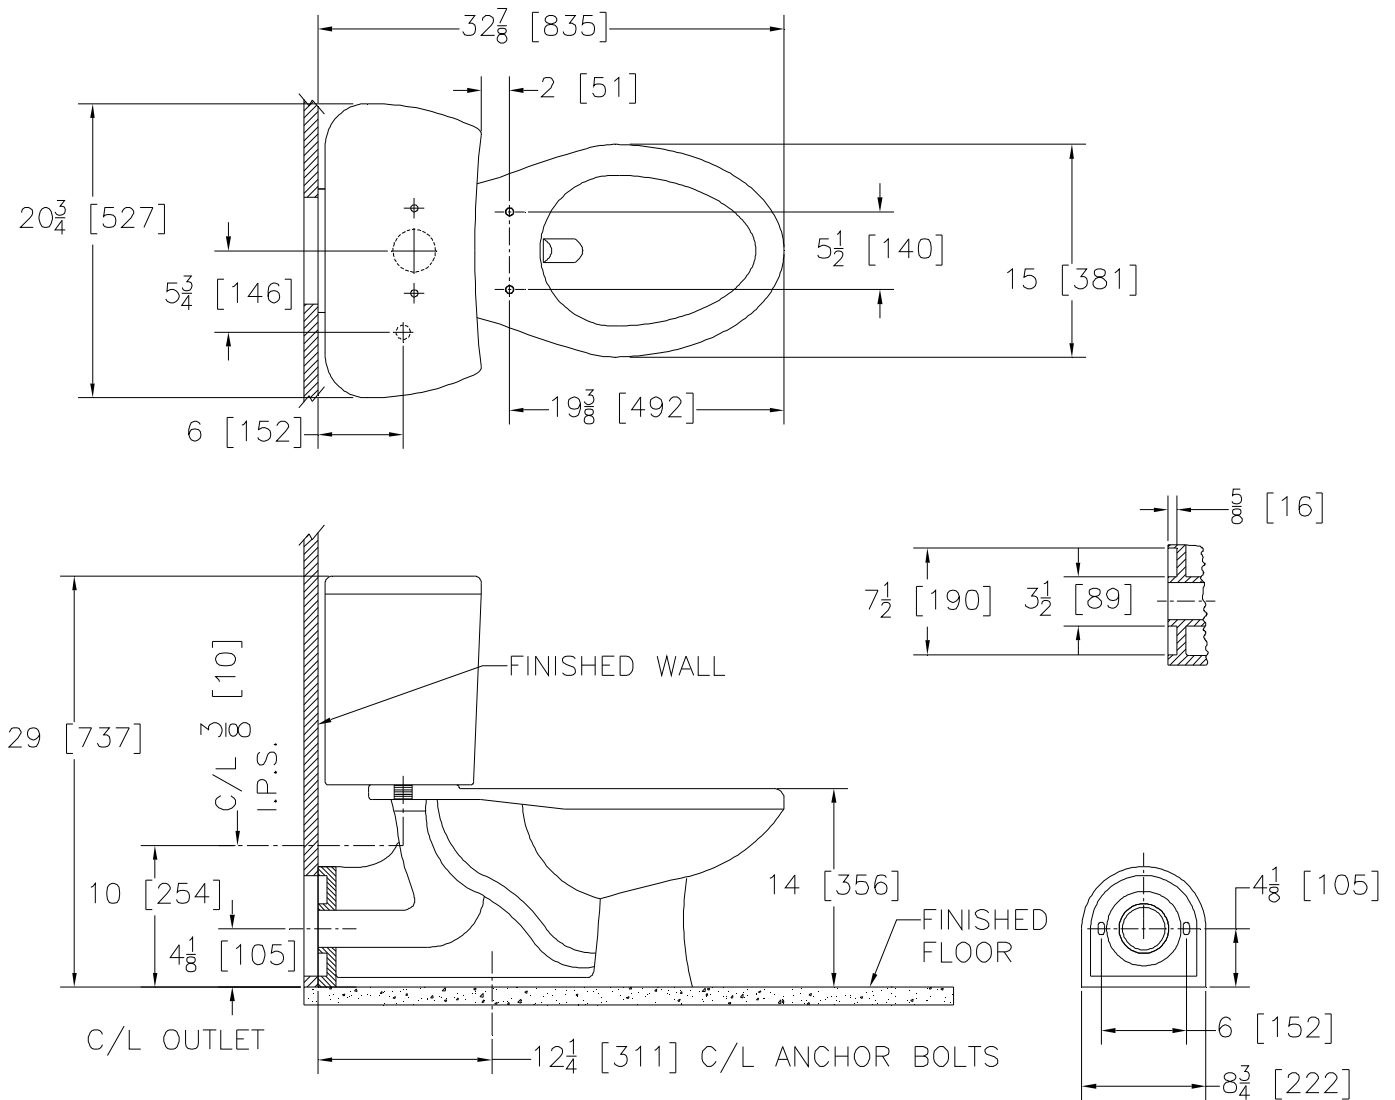

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2-2003 and CAN/CSA B45 requirements.

Zurn Plumbing Products Group Commercial Brass and Fixtures Operation
2640 South Work Street · Falconer, NY 14733 · Phone: 716-665-1132 · Fax: 716-665-1135 · www.zurn.com