

24" Marvel Outdoor Mobile & Built-In Beer Dispensers

Model # MO24BS & MO24BT

Performance

- CSA certified for outdoor use to withstand elements like rain, corrosion, high humidity and heat
- Tested to perform in temperatures as high as 115° F
- Dynamic Cooling Technology™ delivers the industry's best temperature stability and rapid cool down, tested and proven to cool nearly 2x faster than competitors
- Thermal-efficient insulated cabinet ensures optimum energy efficiency and cooling performance
- Easy-to-clean integrated drain system keeps spillage under control
- Double-insulated tower reduces foam on pour and prevents condensation

Storage Capabilities

- 5.7 cu. ft. capacity
- The only beer dispenser that can store half barrel, quarter barrel (pony keg), sixth barrels or Cornelius kegs, slim quarters, growlers, bottles or caps
- Lo-Boy coupler makes it easier to store, tap and swap out tall U.S. type D half barrels
- (2) exclusive stow-on-board shelves convert unit to an all-refrigerator capable of storing perishables
- Secure CO₂ tank storage area and drain basin
- Includes tower, drain pan, 5 lb. CO₂ tank, hoses, connectors and floor shield
- Anti-scuff interior floor shield and stainless steel threshold protects cabinet from wear and tear from loading and unloading kegs
- Rear port for external CO₂ tank option

Temperature Controls

- Marvel Prime[™] controls for precise, frost-free temperature management between 34° to 46° F
- Audible alarms for door ajar and high/low temperature ensure your contents stay at optimal temperature

Aesthetics

- Corrosion-resistant stainless steel exterior, sturdy pro-style handle and rugged stainless steel toe kick
- Finish: stainless steel

Additional Convenience

- Door lock provides added safety and security
- Stainless steel toe kick adjustable to 4" with leveling legs
- 1-year parts and labor warranty, 5-year sealed system parts warranty







Certified for Outdoor Use




Ordering Options

SINGLE TAP, BUILT-IN	
Solid Stainless Steel Door, Right Hinge, Stainless Professional Handle	MO24BSS2RS
Solid Stainless steel door, Left Hinge, Stainless Professional Handle	MO24BSS2LS
TWIN TAP, BUILT-IN	
Solid Stainless Steel Door, Right Hinge, Stainless Professional Handle	MO24BTS2RS
Solid Stainless Steel Door, Left Hinge, Stainless Professional Handle	MO24BTS2LS
SINGLE TAP, MOBILE	
Solid Stainless Steel Door, Locking Casters, Mug Rail, Right Hinge, Stainless Professional Handle	MO24BSSMRS
TWIN TAP, MOBILE	
Solid Stainless Steel Door, Locking Casters, Mug Rail Right Hinge, Stainless Professional Handle	MO24BTSMRS

*Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.



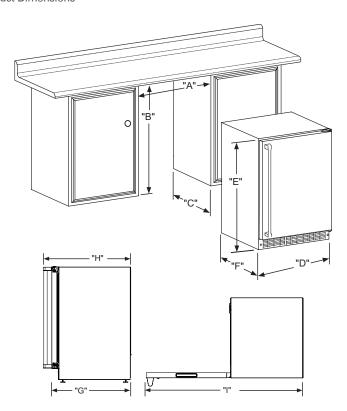

Rough-In Dimensions

A. Rough-In Width	24"
B. Rough-In Height	34" to 35"
C. Rough-In Depth	24"

Product Dimensions

D. Width	23 7/8"
E. Height	33 3/4" to 34 3/4"
F. Depth	21 1/2"
G. Depth to Front of Door	23 23/32"
H. Depth to Handle	26 7/32"
I. Depth with door at 90°	46 13/32"

Product Features

Interior Cabinet Finish	White
Capacity	Stores half barrel, quarter barrel (pony keg), sixth barrels/ Cornelius kegs, slim quarters, growlers, bottles or cans
Shelving System	Stow-on-Board
Shelf Fronts	Stainless Steel
Other Storage	Drain pan, CO2 tank, hoses, regulator, floor shield
Interior Lighting	NA
Toe Grill Finish	Stainless Steel
Hinge	Classic Hinge
Handle	Professional
Control Type	Prime™
Temperature Range	34° to 46° F
Lock	Yes
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	6′
Shipping Weight	160 lbs
Finishes	Stainless Steel
Vacation Mode	No
Agency Approvals	CSA, ENERGY STAR