SCRR232



Product Features:

Commercially approved Commercial construction meeting UL commercial listing standards Complete stainless steel construction Interior and exterior are entirely constructed from stainless steel for lasting durability and easy cleanup Forced air cooling Top-mounted commercial fan ensures rapid temperature recovery Automatic defrost with adjustable cycle Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup defrost Closes to save energy but will remain open when the door is opened at a 90° angle for easier Self-closing door loading Open door alarm Alarm will beep 3 times if the door is left open for 30 seconds, 5 times at 60 seconds, and will sound continuously if the door is open for more than 5 minutes Temperature alarm Visual and audible alarms alert if the interior temperature rises or falls out of set range 6 inch casters Ships with a set of casters (2 locking) for optional user installation

Microprocessor control panel

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

management

83.75" x 27.5" x 31" (H x W x D)

23 cu.ft. commercial reach-in refrigerator in complete stainless steel

Highlights:

Commercially listed to NSF standards

Stainless steel interior and exterior cabinet for true durability in high traffic commercial settings

Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading

info@summitappliance.com

Digital controls with a large LED readout in Celsius or Fahrenheit for intuitive temperature





SCRR232 Specifications:


Interior Depth

Overview		
Height of Cabinet	83.75" (213 cm)	
Width	27.5" (70 cm)	
Depth	31.0" (79 cm)	
Depth with door at 90°	56.5" (144 cm)	
Capacity	23.0 cu.ft. (651 L)	
Defrost Type	Automatic	
Door	Stainless Steel	
Cabinet	Stainless Steel	
US Electrical Safety	UL	
Canadian Electrical Safety	ULC	
Sanitation	ETL-S	
Amps	7.5	
Voltage/Frequency	115 V AC/60 Hz	
Weight	282.0 lbs. (128 kg)	
Shipping Weight	292.0 lbs. (132 kg)	
Parts & Labor Warranty	2 Years	
Compressor Warranty	5 Years	
UPC	761101062358	
Refrigerator Features		
Door Swing	RHD	
Reversible	No	
Shelf Type	Wire	
Shelf Qty	4	
Adjustable Shelves	Yes	
Thermostat Type	Digital	
Fan Type	Interior	
Refrigerant Type	R290a	
Refrigerant Amount	2.5oz.	
High Side PSI	290.0	
Low Side PSI	155.0	
Wheel Qty	4	
Interior Light	Yes	
Temperature Range	33 to 41ºF	
Dimensions		
Interior Height	51.5" (131 cm)	
Interior Width	23.5" (60 cm)	

~6'-6"LG. ELEC. CORD		
27.0"		





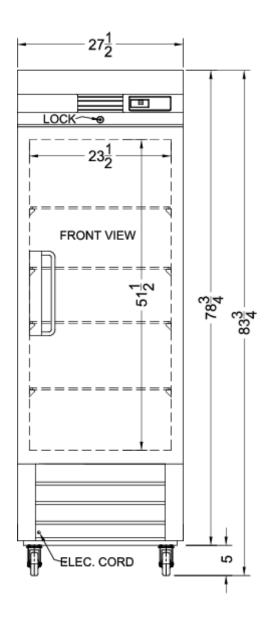

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com

