



SPECIFICATIONS  
**AX SERIES**  
 RANGE HOODS

**160 CFM/6.5 Sones @ 0.10" WG. Horizontal,  
 160 CFM/6.5 Sones @ 0.10"WG. Vertical, 120 Volts, 2.1 amps, 60hz**

• **Dimensions**

Overall bottom projection - 18<sup>3</sup>/<sub>8</sub>"  
 Overall top projection - 12"  
 Height - 6". Available widths: 30"

• **Hood Body**

23 gauge cold rolled steel, auto welded, coated with a baked enamel finish.

• **Motor**

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz., 2.1 amps.

• **Lighting**

Single 60 watt cook light capacity (bulb not included).

• **Ducting Options**



Horizontal ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).  
 Vertical ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).

• **Fan Blade**

One piece polymeric, electronically balanced blade. 6<sup>5</sup>/<sub>8</sub>" diameter with 5 paddles.

• **Electrical connection**

Hood top - 7/8" electrical knockout.  
 Hood back - 7/8" electrical knockout.

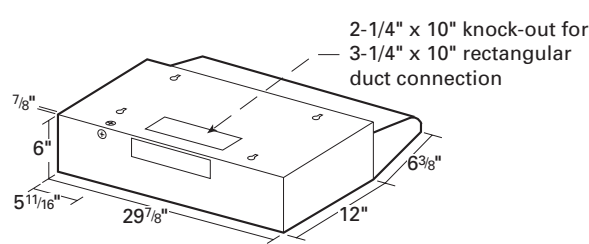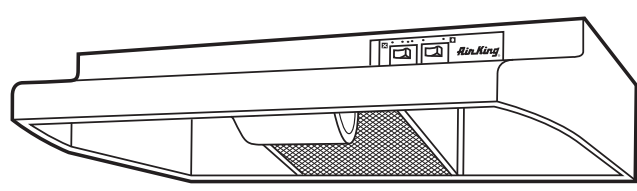

• **Filters**

UL rated, class 2 filter.  
 Grease Filter: RF35 - 8<sup>7</sup>/<sub>8</sub>"x10<sup>3</sup>/<sub>8</sub>" (included).

• **Available Finishes**

White, Black & Stainless Steel.

PERFORMANCE											
Air Flow - CFM	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	Fan Speed RPM	Power Watts
	0	0.05	0.1	0.5	0.2	0.25	0.3	0.35			
<b>Vertical Ducting</b>	201	180	160	140	117	91	68	52	6.0	2680	56
<b>Horizontal Ducting</b>	201	179	161	140	117	95	75	57	6.0	2602	56

<b>PROJECT</b>							<b>ARCHITECT</b>				
<b>LOCATION</b>							<b>ENGINEER</b>				
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>			<b>DATE</b>	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



**United States:**  
 West Chester, Pennsylvania  
 Tel: 877-304-3785  
 Fax: (610) 696-8048

**Canada:**  
 Brampton, Ontario  
 Tel: (905) 456-2033  
 Fax: (905) 456-1015