
# American Standard



2555.602 Shown.

#### **GENERAL DESCRIPTION:**

Cast brass valve body. Washerless 47mm ceramic disc valve cartridge cycles from "Off" to "Cold" to "Hot". Hot limit safety stop. Pressure balancing cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressures. 1/2" NPT threaded inlets/outlets with screwdriver stops. 4-1/2" easy clean "Rain" showerhead has 2.5gpm/9.5L/min. flow restrictor. Cast brass shower arm. Integral diverter. Durable brass wall escutcheon. Metal lever handle. Rough-in plaster guard designed for use as thin-wall mounting adaptor. Brass tub spout.

#### **PRODUCT FEATURES:**

**Solid Brass Construction:** Durable, ideal material for prolonged contact with water.

**Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.

**Pressure Balancing Valve:** Maintains output temperature in response to changes in relative hot and cold supply pressure. Diaphragm system engineered to eliminate cross flow and spool "thumping". Avoids failure due to mineral deposits - ideal for use with hard water.

**Built-in Diverter:** Easy to use, integrated in valve body and includes positive shut-off. Allows spout and showerhead in any desired installation location.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.


**Integral Plaster Guard and Mounting Plate:** Plaster guard designed to protect valve during installation and to serve as a mounting plate for thin wall installations.

### **Town Square**

PRESSURE BALANCE BATH/SHOWER FITTING WITH BUILT-IN DIVERTER

#### **MODEL NUMBER:**

- 2555.602 Pressure Balance Bath/Shower Built-in diverter. "Rain" showerhead. Brass tub spout. For wall mount installation.
- ☐ 2555.652 Pressure Balance Bath/Shower
  Built-in diverter. "Rain" showerhead. Brass tub spout.
  For deck mount installation.

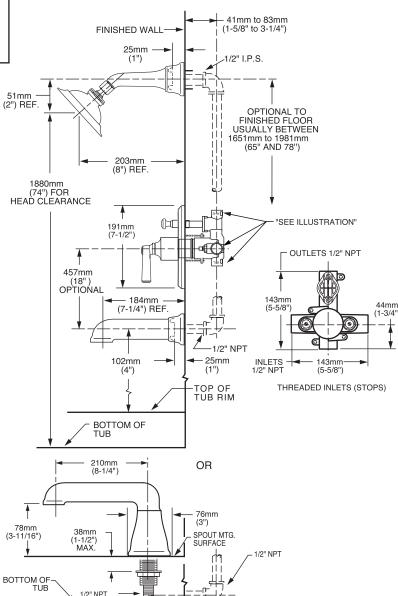

#### SUGGESTED SPECIFICATION:

Bath/shower fitting shall be cast brass construction with all brass spout and showerhead. Shall also feature washerless ceramic disc valve cartridge which allows user to control both water temperature and volume. Fitting shall be equipped with a pressure balancing mechanism and hot limit safety stop. Fitting shall be American Standard Model # 2555.\_\_\_\_\_.




## **Town Square**

PRESSURE BALANCE BATH/SHOWER FITTING WITH BUILT-IN DIVERTER

#### **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1M CSA B 125 ASSE 1016



		Finish Options		
Product		Polished Chrome	PVD Polished Brass	PVD Satin
Number	Description	002	099	295
2555.602	Pressure Balance Bath/Shower w/built-in diverter. 1/2" NPT threaded inlets/outlets. "Rain" showerhead. Brass tub spout for wall mount installation.			
2555.652	Pressure Balance Bath/Shower w/built-in diverter. 1/2" NPT threaded inlets/outlets. "Rain" showerhead. Brass tub spout for deck mount installation			

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.