


5401.000 Shown

MODEL NUMBER:

- 5400.000 Centerset Lavatory**
1.5 gpm pressure compensating aerator. Less drain.
Less pop-up hole. Less handles.
- 5401.000 Centerset Lavatory**
1.5 gpm pressure compensating aerator. Pop-up drain.
Less handles.
- 5402.000 Centerset Lavatory**
1.5 gpm pressure compensating aerator. Grid strainer
drain. Less handles.

Handles must be ordered separately.

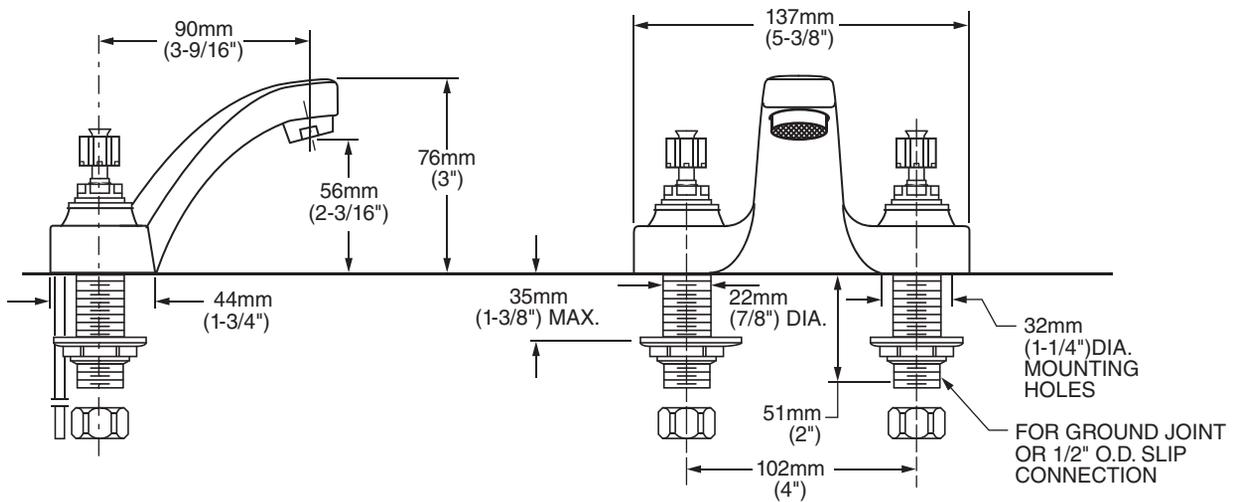

GENERAL DESCRIPTION:

Durable cast brass construction throughout. Amarilis 1/4 turn washerless ceramic disc valve cartridges. One-half inch male inlet shanks with brass coupling nuts and shank nuts. All brass drain body with 1-1/4" (32mm) tailpiece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

- Pressure Compensating Aerator:** Provides a constant water flow of 1.5 gpm throughout the pressure range.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.
- Lead Free:** Faucet contains $\leq 0.25\%$ total lead content by weighted average.


SUGGESTED SPECIFICATION:

4" centerset lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 540____.002 and handle kit # 0000____.002.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:


- ASME A112.18.1
- CSA B 125
- NSF 61/Section 9
- NSF 372

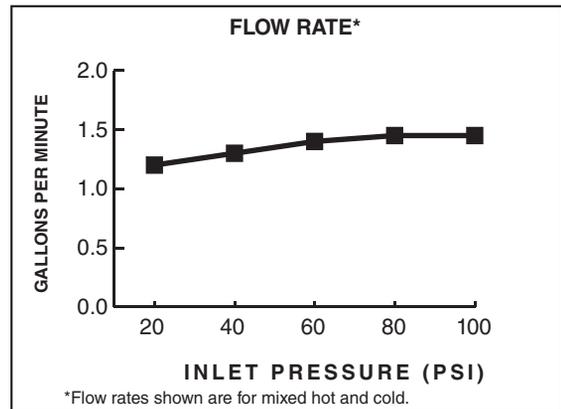

| Product Number | Description | Finish |
|----------------|---|-----------------|
| | | Polished Chrome |
| | | 002 |
| 5400.000 | Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Less drain. Less handles. | |
| 5401.000 | Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Pop-up drain. Less handles. | |
| 5402.000 | Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Grid strainer drain. Less handles. | |

Handles must be ordered separately.

The above fittings will accept the following Amarelis-Series handles.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

| Part Suffix | Description |
|-------------|---|
| LV22 | 2.2 gpm (8.3 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet |
| V22 | 2.2 gpm (8.3 Lpm) Vandal-Resistant Aerator |
| A15LV | Anti-Microbial 1.5 gpm (5.7 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet |
| LV15 | 1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet |
| V15 | .5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator |
| LV10 | 1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet |
| V10 | 1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator |
| V05 | 0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Non-Aerated Spray |
| V035** | 0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Non-Aerated Spray |

*PCA - Pressure Compensating
 **Meets Cal Green Code