

Aqua-Pure®

Spec # _____

Quantity _____

Models:

**AP11T / AP101T /
AP141T / AP102T**

Whole House Water Filters

Applications:

- Sediment & Rust
- Chlorine Taste & Odor
- Scale

At a Glance:

- Standard 3/4" NPT inlet/outlet connections
- Flow rate of up to 10 gpm for single cartridge housing size
- Flow rate of up to 16 gpm for double cartridge housing size
- Housings offered with pressure relief (AP11T)
- Housings offered with valve-in-head (AP101T, AP141T, AP102T)




Product Benefits:

- Designed with built-in shut-off valve offering fast and easy cartridge changes
- Systems come complete with our premium performance sediment cartridge (AP11T, AP101T)
- AP141T comes complete with our premium performance sediment/rust and scale inhibitor cartridge
- Filter wrench included providing fast, effortless sump removal for changing cartridges
- Manufactured from FDA CFR-21 compliant materials
- Clear housing for easy viewing of cartridge
- Complete installation manuals are enclosed for easy reference and simple installation
- 10 year limited warranty to help provide long-term operation, factory support and service

Product Specifications:

| Model No. (Part No.) | Inlet/ Outlet Size | Dimensions | | Approx. Weight | Flow Rate | Clean Pressure Drop | Max. Water Temp. | Max. Water Pressure | Repl. Ctg. No. | Repl. Ctg. Qty. | Degree of Filtration |
|-------------------------|--------------------------|------------------------|----------------------|-----------------------|----------------------|---|------------------------|---------------------------|-------------------------------|--------------------|-------------------------|
| | | Height | Diameter | | | | | | | | |
| AP11T (55299-02) | 3/4" NPT | 13-11/16" (34.8 cm) | 4-9/16" (11.6 cm) | 3 lbs. (1.4 kg) | 8 gpm (30.3 lpm) | 2 psid @ 8 gpm (13.8 kPa @ 30.3 lpm) | 100°F (37.8°C) | 125 psi (862 kPa) | AP110 | 1 | 5 micron nominal |
| AP101T (55300-02) | 3/4" NPT | 14-3/16" (36.0 cm) | 4-9/16" (11.6 cm) | 4.13 lbs. (1.9 kg) | 8 gpm (30.3 lpm) | 8.3 psid @ 8 gpm (57.2 kPa @ 30.3 lpm) | 100°F (37.8°C) | 125 psi (862 kPa) | AP110 | 1 | 5 micron nominal |
| AP141T (55300-16) | 3/4" NPT | 14-3/16" (36.0 cm) | 4-9/16" (11.6 cm) | 4.13 lbs. (1.9 kg) | 10 gpm (37.9 lpm) | 8.3 psid @ 8 gpm (57.2 kPa @ 30.3 lpm) | 100°F (37.8°C) | 125 psi (862 kPa) | AP420 | 1 | 5 micron nominal |
| AP102T (55300-08) | 3/4" NPT | 24-1/4" (61.6 cm) | 4-9/16" (11.6 cm) | 5 lbs. (2.3 kg) | 16 gpm (60.6 lpm) | Dependant on Cartridge Used | 100°F (37.8°C) | 125 psi (862 kPa) | cartridges sold separately | 2 | 1-50 micron nominal |

Aqua-Pure®

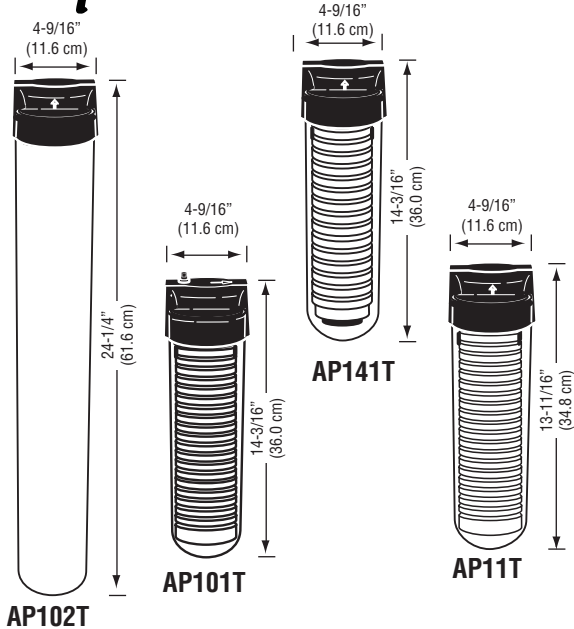

Spec # _____

Quantity _____

Model Number _____

Part Number _____

Physical Specifications:

- Standard 3/4" NPT inlet/outlet connection
- System is a single vessel design
- System is manufactured from FDA CFR-21 compliant materials
- System has a maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100°F (37.8°C)
- System to be installed at point of entry


Replacement Cartridge Options

| Sediment Model | Load | Nominal Micron Rating | Application | | | Flow Rate |
|----------------|------------|-----------------------|---------------|-----------------------|-------|-------------------|
| | | | Sediment/Rust | Chlorine Taste & Odor | Scale | |
| AP1001 | Extra Fine | 1 | • | | | 8 gpm (30.3 lpm) |
| AP1003 | Fine | 3 | • | | | 8 gpm (30.3 lpm) |
| AP110 | Normal | 5 | • | | | 8 gpm (30.3 lpm) |
| AP124 | Heavy | 50 | • | | | 8 gpm (30.3 lpm) |
| AP117* | Normal | 5 | • | • | | 3 gpm (11.4 lpm) |
| APS117* | Normal | 5 | • | • | • | 3 gpm (11.4 lpm) |
| AP420 | Normal | 5 | • | | • | 10 gpm (37.9 lpm) |

*For point-of-use applications only

Easy Installation:

CAUTION: Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

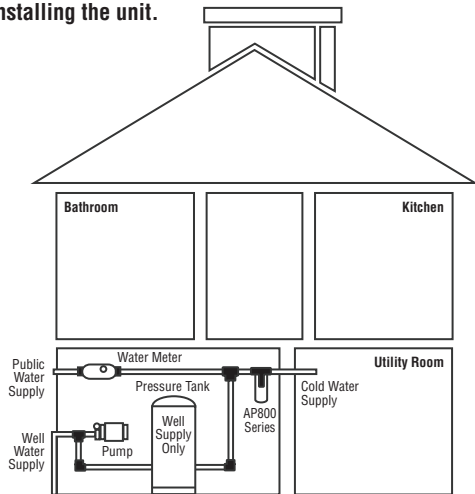

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. **Change the filter cartridge at least every 6 months. Improper installation and maintenance may result in property damage due to water leakage.**

Limited Warranty:

CUNO Incorporated warrants this Product to be free from defects in material and workmanship for ten (10) years from the date of purchase. This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by CUNO or failure to follow installation and use instructions. If the Product is defective CUNO will replace the Product or refund your Product purchase price. CUNO will not be liable for any indirect, special, incidental, or consequential damages arising from the use of this Product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. To obtain warranty service, mail your request to Warranty Claims, CUNO Incorporated, 400 Research Parkway, Meriden, CT 06450. Proof of purchase (original sales receipt) must accompany the warranty claim, along with a complete description of the Product, model number and alleged defect. This warranty gives you specific legal rights and you may have other rights which vary from state to state, or country to country.

Distributed by:



CUNO Incorporated
 400 Research Parkway
 Meriden, CT 06450 U.S.A.
 Toll Free: 1.800.222.7880
 Worldwide: 203.237.5541
 Fax: 203.238.8701