


Submitted Model No.: _____

Specific Features: _____

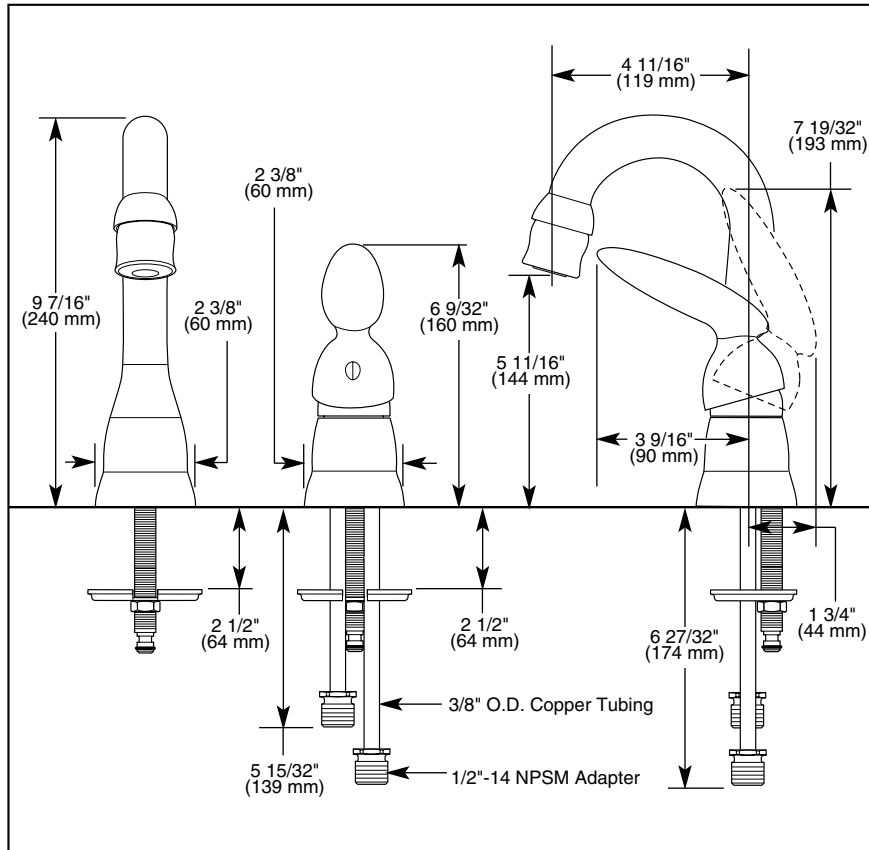

BAR & PREP SINK FAUCETS

- Single Handle
- The Michael Graves Collection™
- Widespread
- Two Hole Sink Applications
- Quick Snap® Hose Installation



UL Listed to US and Canadian Safety Standards and Classified in accordance with ANSI/NSF 61 21PL




COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- NSF 61
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed to ASME A112.18.1
- CSA Certified

STANDARD SPECIFICATIONS:

- Single handle faucets for mounting on two hole sinks.
- Solid fabricated brass body.
- Requires minimum 1 1/4" (32 mm) diameter hole.
- 4 11/16" (119 mm) long, 9 7/16" (240 mm) highspout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle to indicate hot/cold temperature.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- All operating parts shall be replaceable from the top.
- 3/8" O.D. straight, staggered copper supply tubes - 5 15/32" (139 mm) and 6 27/32" (174 mm) long - with 1/2"-14 NPSM adapters.
- Quick Snap® hose installation.
- Dual function, swivel head aerator.

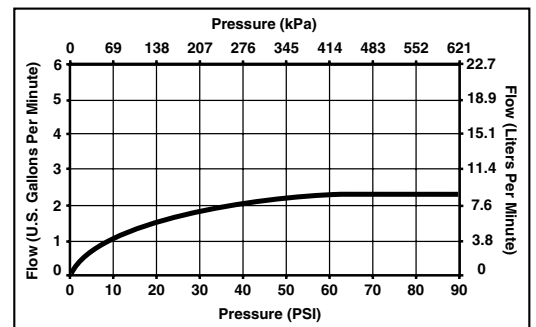

Standard Features	198	198-MC	198-SS
Washerless	◆	◆	◆
Two Hole Installation	◆	◆	◆
Required Minimum 1 1/4" (32 mm) Diameter Hole	◆	◆	◆
4 11/16" (119 mm) Long, 9 7/16" (240 mm) High Spout Swings 360°	◆	◆	◆
Lever Handle with Red/Blue Indicators	♿	♿	♿
3/8" O.D. Straight, Staggered Copper Supply Tubes - 5 15/32" (139 mm) and 6 27/32" (174 mm) Long	◆	◆	◆
1/2"-14 NPSM Adapters	◆	◆	◆
Dual Function, Swivel Head Aerator	◆	◆	◆
Chrome Finish	◆		
Matte Chrome Finish		◆	
<i>Brilliance</i> ® Stainless Finish			◆



Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2003 Masco Corporation of Indiana