

81T201-WMSHW
- Exposed Hard Wire Operated
1-1/2" Top Inlet Closet Fixture

- Polished chrome plated vandal resistant metal cover with 4" wallmount sensor
- Right or left-hand supply installation
- ADA compliant, automatic operation hard wire powered H₂OPTICS™ technology infrared sensor
- Infrared sensor range adjustment of 610mm-1422mm (24" - 56"), in 8" increments, factory set at 40" (±2")
- Hardwire adaptor
- Vandal resistant copper tube conduit
- 24 hour courtesy flush factory set to off
- 24 VAC input
- Electronic manual override button
- (110 to 24 VAC Transformer not included. See selection below for additional part number.)
- Quiet action, Teck® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- **External water conserving flush adjustment**, factory set at 60 PSI to 6 litre (1.6 US gal.) (except -48 and -6 models)
- **1" FIP/Copper sweat inlet adaptor**, angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube, stainless steel wall flange, spud flange, concealed spud nut, and 292mm (11-1/2") outlet tube

Approvals:

- CSA certified
 - Complies to ASSE 1037
 - ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
 - IAPMO listed
- (Contact Delta Representative for State and/or Local Approvals.)

Engineer/Architect Approval

Model Specified:

Approval:

Date:




H₂OPTICS™

81T201-6-WMSHW
 Same as 81T201-WMSHW,
 but **Not Field Adjustable**

81T201-48-WMSHW
 Same as 81T201-WMSHW, but factory set
 at 60 PSI to 4.8 litre (1.27 US gal.),
Not Field Adjustable



81T201-WMSHW

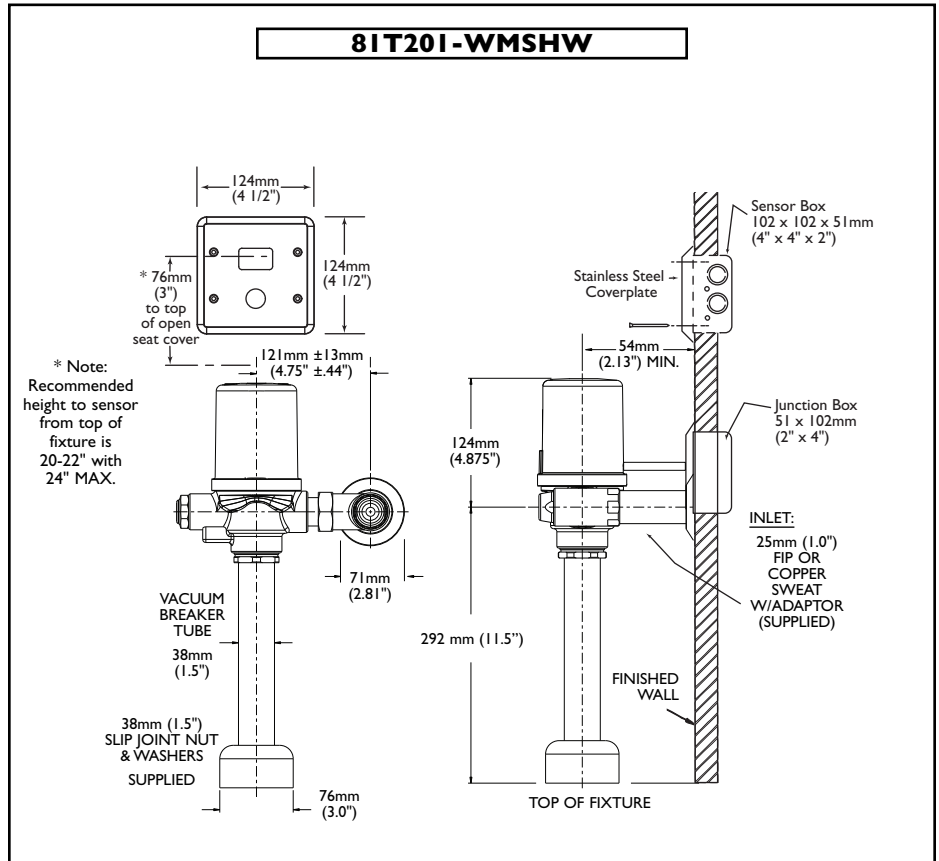

Note: For high and low pressure applications, please see page 7.C.18 High Water Pressure note for more details.
 Verify flow requirements with bowl manufacturer.

✓	TRANSFORMERS:	
	060704A	110 to 24VAC Class II 20VA (for up to 5 Sensor Modules)
	060771A	110 to 24VAC Class II 40VA (up to 10 Sensor Modules)
	060772A	110 to 24VAC Class II 100VA (up to 25 Sensor Modules)

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page as a product submittal sheet.