


MultiChoice™ Universal Thermostatic Tub and Shower

**TECK®
COMMERCIAL**

DELTA®

Specification: (example)

- R10000-UNWS** ROUGH-IN only
 - Concealed in-wall MultiChoice™ universal valve
 - Back-to-back capability, Integral screwdriver stops
 - **Heavy Duty forged brass** valve body
 - 1/2" Universal inlets to accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adaptors
 - 1/2" Male thread inlets/outlets
- FINISH TRIM ONLY:**
 - TempAssure® 17T Thermostatic cartridge
 - Polished chrome plated finish
 - Lever volume control; temperature adjustment dial
 - Non-removeable red/blue temperature markings and ... with ... (add product variation) with ... (add shower)

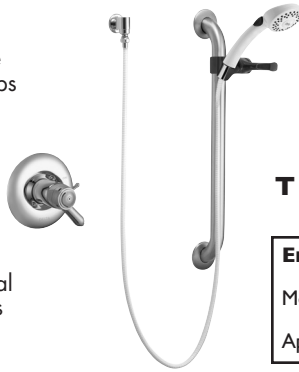

T17TH155

Engineer/Architect Approval







Model Specified:

Approval:

Date:

TUB AND SHOWER DESCRIPTION	PRODUCT NO.		
ROUGH-IN Valve	R10000-UNWS		
FINISH TRIM only	T17TH		5



PRODUCT VARIATION	SHOWER	HANDLE
0 <input type="checkbox"/>	0 Specify "0" When No Shower Outlet Required <input type="checkbox"/>	0 <input type="checkbox"/>
1 Shower Valve Only  <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>
2 Tub and Shower  <input type="checkbox"/>	2 3-Function Touch-Clean Showerhead, Arm & Flange 2.5 USGPM (9.5 L/min.)  <input type="checkbox"/>	2 <input type="checkbox"/>
3 <input type="checkbox"/>	3 Touch-Clean Showerhead, Arm & Flange 2.5 USGPM (9.5 L/min.)  <input type="checkbox"/>	3 <input type="checkbox"/>
4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>
5 <input type="checkbox"/>	5 Handshower, 610mm (24") S/S Grab Bar with ADA Slide 2.5 USGPM (9.5 L/min.) (1)  <input type="checkbox"/>	5 Metal Lever Volume Control Handle w/ Temperature Adjustment  <input checked="" type="checkbox"/>
6 <input type="checkbox"/>	6 <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 <input type="checkbox"/>	7 <input type="checkbox"/>
8 <input type="checkbox"/>	8 <input type="checkbox"/>	8 <input type="checkbox"/>
9 <input type="checkbox"/>	9 <input type="checkbox"/>	9 <input type="checkbox"/>

Set screw shower arm flange supplied on Shower Option No. 2 and 3. (1) Two check valves in handshower. Refer to www.specselect.com for individual models.

See Page DSP-B-R10000-HDF for additional Rough-In options.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

See Page DSP-SHWA Rev. C for Add-On options available. Note: Use this page front and back as a product submittal sheet.

Flowrates are at 80 PSI.


DSP- T17TH1



TECK[®]
COMMERCIAL


MultiChoice™ Universal Thermostatic Tub and Shower

Approvals:



- CSA certified
- Complies to ASME A112.18.1
- Lever Handle ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force. 
- Thermostatic Valve ASSE 1016
- Handshower back flow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3 and ASME A112.18.1 / CSA B125.1.
- IAPMO listed

(Contact Delta Representative for State and/or Local Approvals.)

FLOWRATE vs PRESSURE

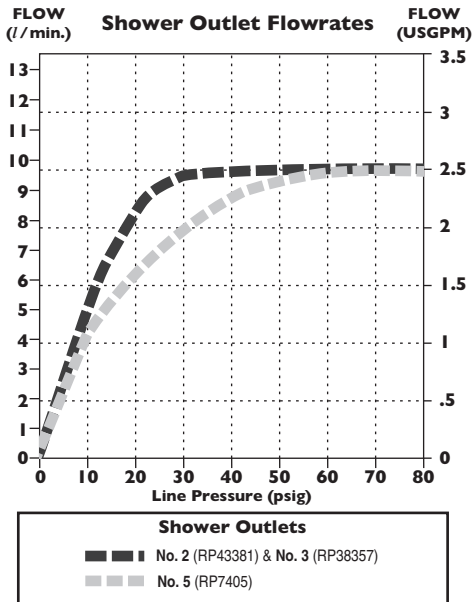

FLOWRATE vs PRESSURE

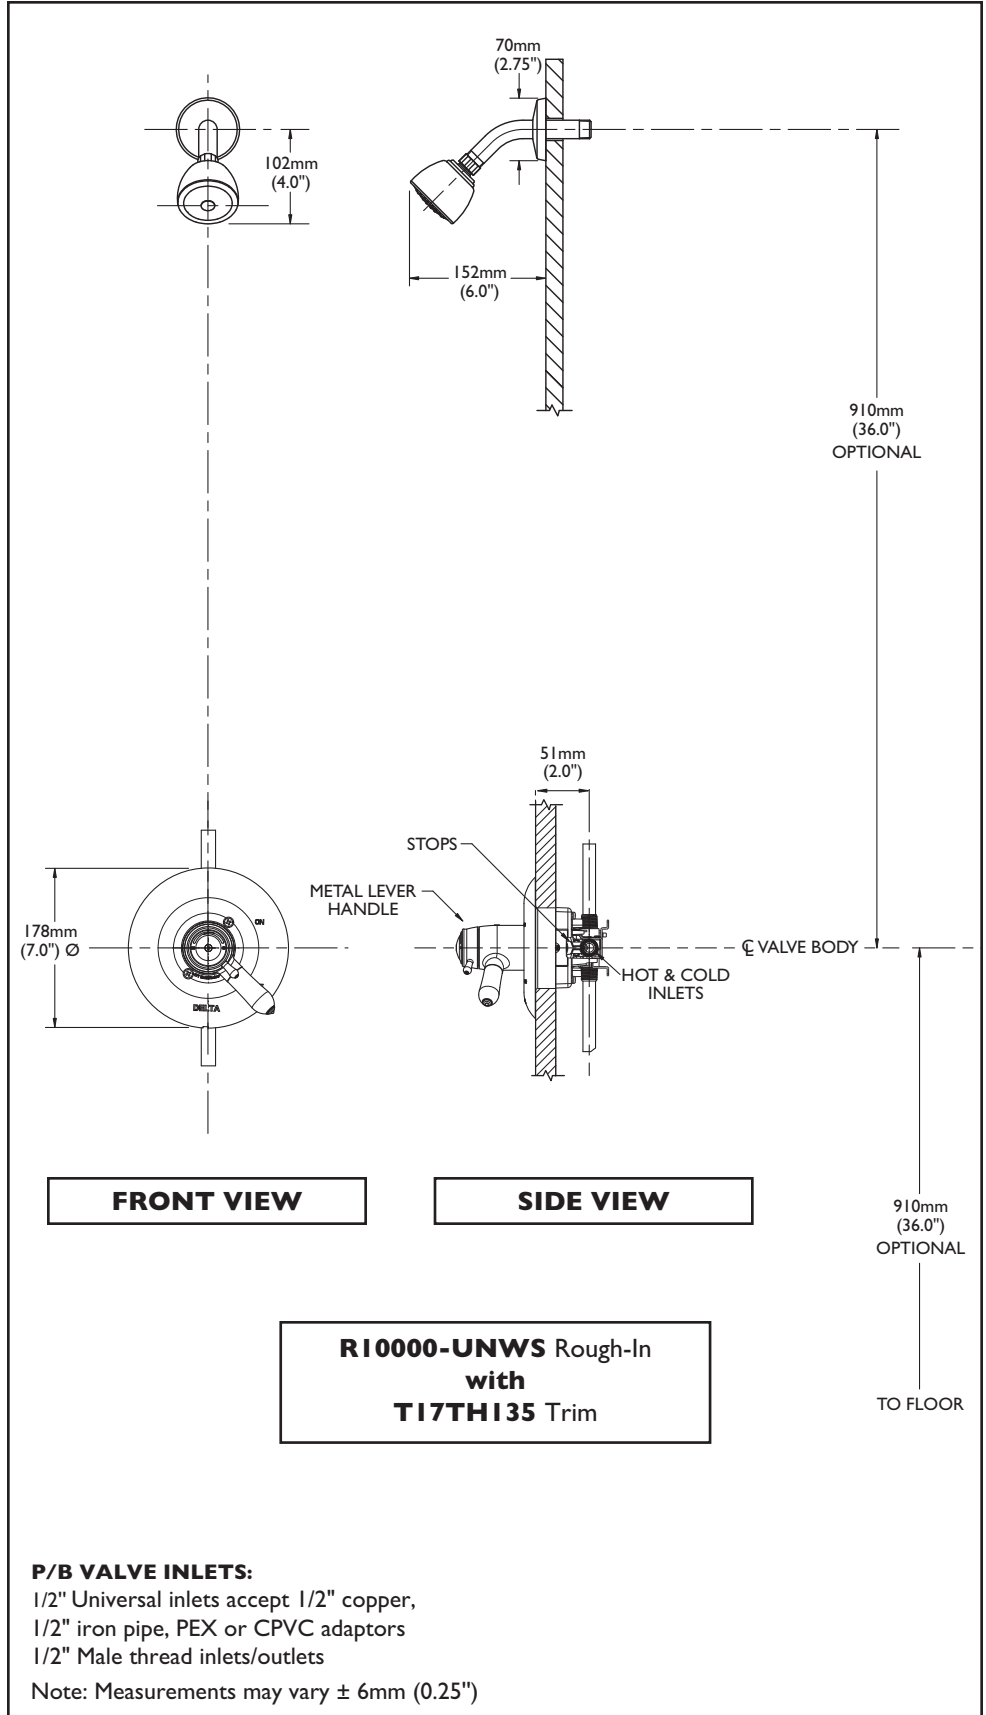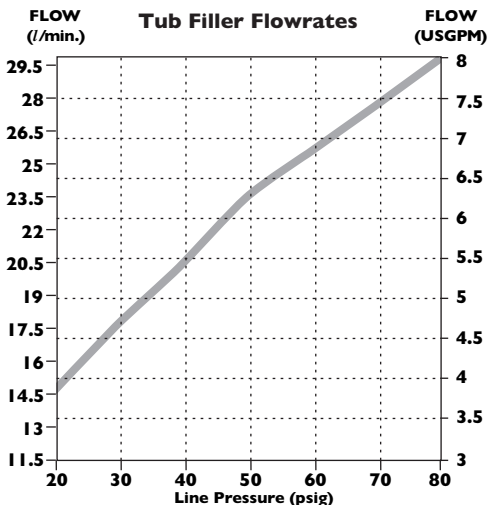

FRONT VIEW

SIDE VIEW

RI 0000-UNWS Rough-In
with
T17TH135 Trim

P/B VALVE INLETS:

- 1/2" Universal inlets accept 1/2" copper,
- 1/2" iron pipe, PEX or CPVC adaptors
- 1/2" Male thread inlets/outlets

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

DSP-T17TH1

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

June 2009

TO WHOM IT MAY CONCERN


Delta Faucet Company handshowers are certified as being compliant to the national consensus standard ASME A112.18.1/CSAB125.1 for Plumbing Supply Fittings. This standard is referenced in many state/provincial and city codes as well as the International Plumbing Code, the Uniform Plumbing Code and the Canadian Plumbing code.

The backflow protection provided in these hand showers is by means of two check valves which individually meet the requirements of ASME A112.18.3 Performance Requirements for Backflow Protection Devices and Systems in Plumbing Fixture Fittings, which is referenced in ASME A112.18.1/CSA B125.1. These check valves are listed as being in compliance with the ASME A112.18.3 standard, which requires that two such devices are required for suitable backflow protection in a finished product.

With this type of backflow protection these handshowers can be used with any valve which may or may not have its own backflow protection system and do not rely on additional devices such as vacuum breakers to be installed with them as the protection is integral and cannot be removed.

If you require any additional information, please contact us.

Yours sincerely,

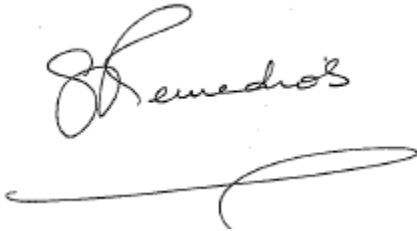

Sally Remedios,
Manager, Product Compliance
Ph: 317 587 1270
Fax: 317 848 0750
E-mail sar@deltafaucet.com