

ELKAY[®]

SPECIFICATIONS

Heavy Duty 14 Gauge Drinking Fountain Wall Mount, Fully Exposed Barrier-Free Access Models EHWM214C and EHW214C

GENERAL

Wall mounted drinking fountain constructed of #14 gauge, type 304, stainless steel polished to a satin finish.

Contoured basin minimizes splashing and has vandal-resistant bubbler. Keyed in location to prevent rotation. Easy to operate, fully functional push button is vandal-resistant. Bottom cover plate included. Patented* valve and in-line flow regulator provides stream from 20 to 105 psi.

THIS DRINKING FOUNTAIN COMPLIES WITH THE REQUIREMENTS OF A.D.A. (AMERICANS WITH DISABILITIES ACT) WHEN PROPERLY INSTALLED.

NO LEAD DESIGN

THIS DRINKING FOUNTAIN COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.


Elkay Drinking Fountains are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all leaded materials, such as leaded brass, have been removed.

This drinking fountain is certified to **NSF/ANSI 61**.


CONSTRUCTION

EHWM214C furnished complete with vandal-resistant bubbler and easy to operate, vandal-resistant front push button. Patented* valve and in-line flow regulator provides stream from 20 to 105 psi. Stainless steel wall plate with surface mounting plate and vandal-resistant 14 gauge bottom cover plate included. Trap included.

EHW214C does not include the surface mounting plate. To be mounted with MPW101 in-wall mounting plate. ML100 in-wall support legs are optional.

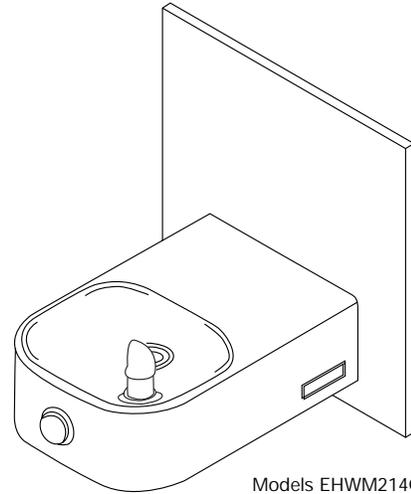

Models EHWM214C and EHW214C

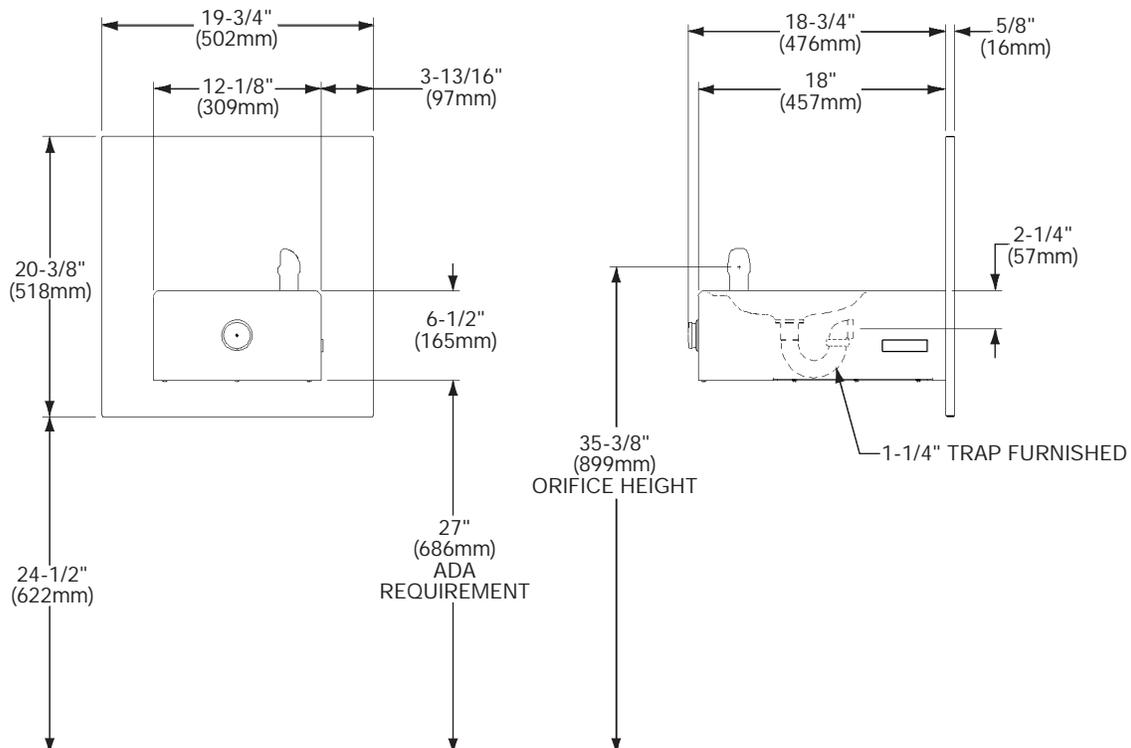

* Patent #4,481,971



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


INSTALLER NOTE

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND VALVE INCLUDING ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL. IT IS RECOMMENDED THAT SHUT OFF VALVE AND SUPPLY TUBING SUPPLIED BY OTHERS BE NON-METALLIC.

OPERATION OF QUICK CONNECT FITTINGS

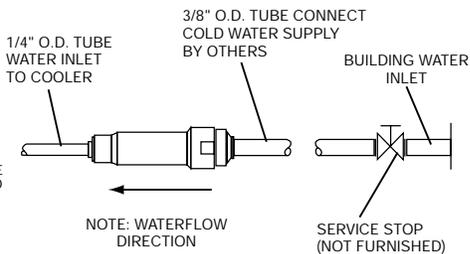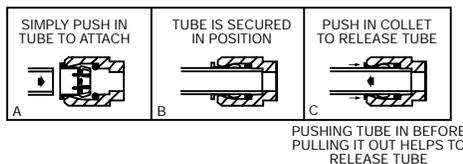

**When installing EHWM214C which includes a surface mounting plate, refer to the diagrams shown below.
 For electrical, waste, and water supply locations, refer to the Installation/Owners manual.**

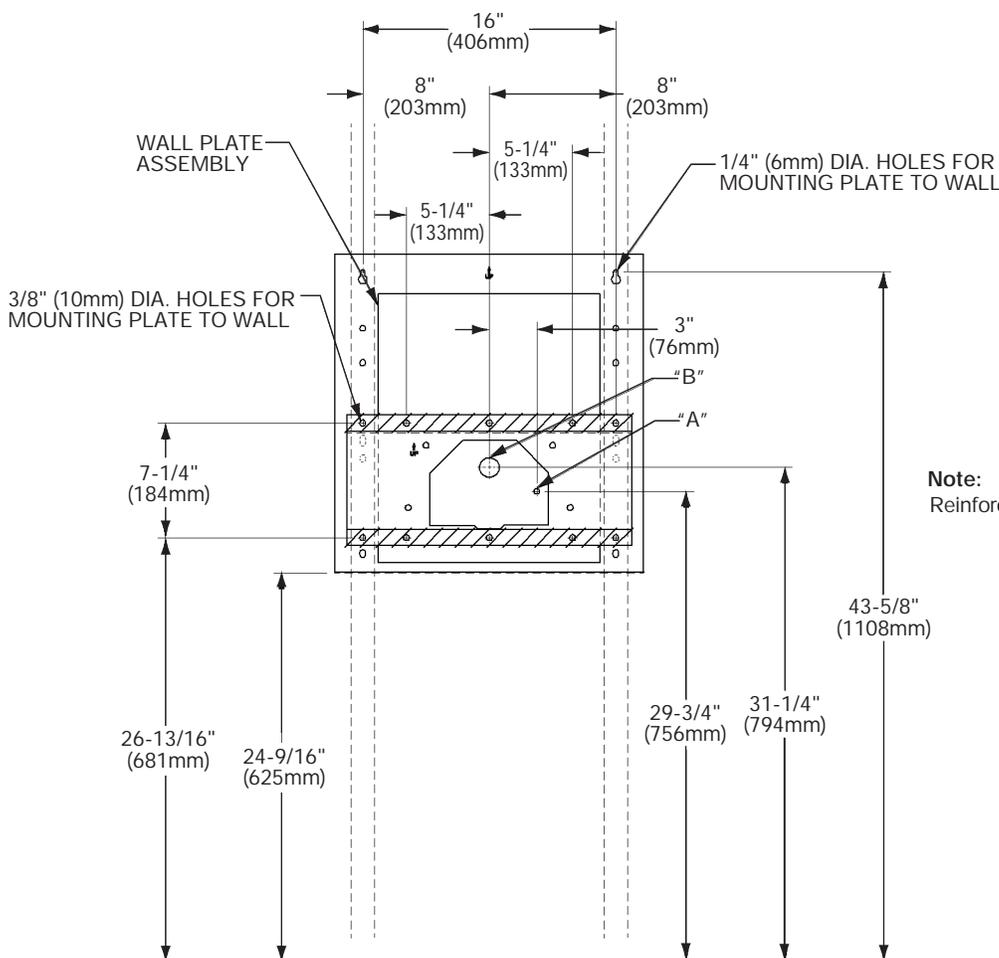


Note:
 Reinforce the wall in the shaded areas.


- LEGEND**
- A = Recommended water supply location 3/8" O.D. unplated copper tube connect, stubbed 1-1/2" (38mm) from the wall. Shut off by others.
 - B = Recommended location for waste outlet 1-1/4" O.D. drain, stubbed 6-5/8" (168mm) from the wall.

When installing EHW214C with MPW101 in-wall plate mounted directly to wall studs, refer to the diagrams shown below.

For electrical, waste, and water supply locations, refer to the Installation/Owners manual.

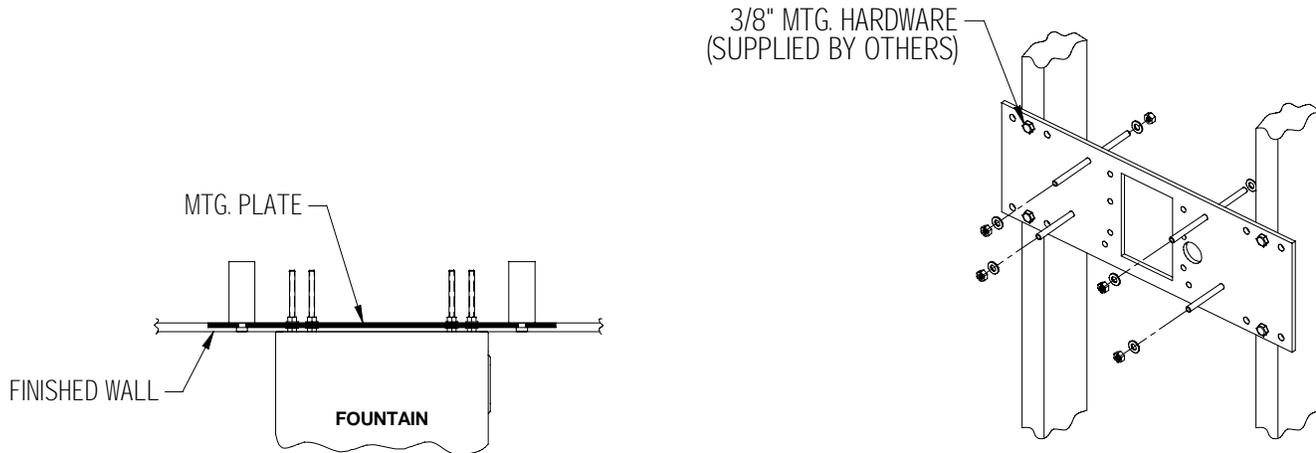

Note - After installation, threaded rods may need to be trimmed.

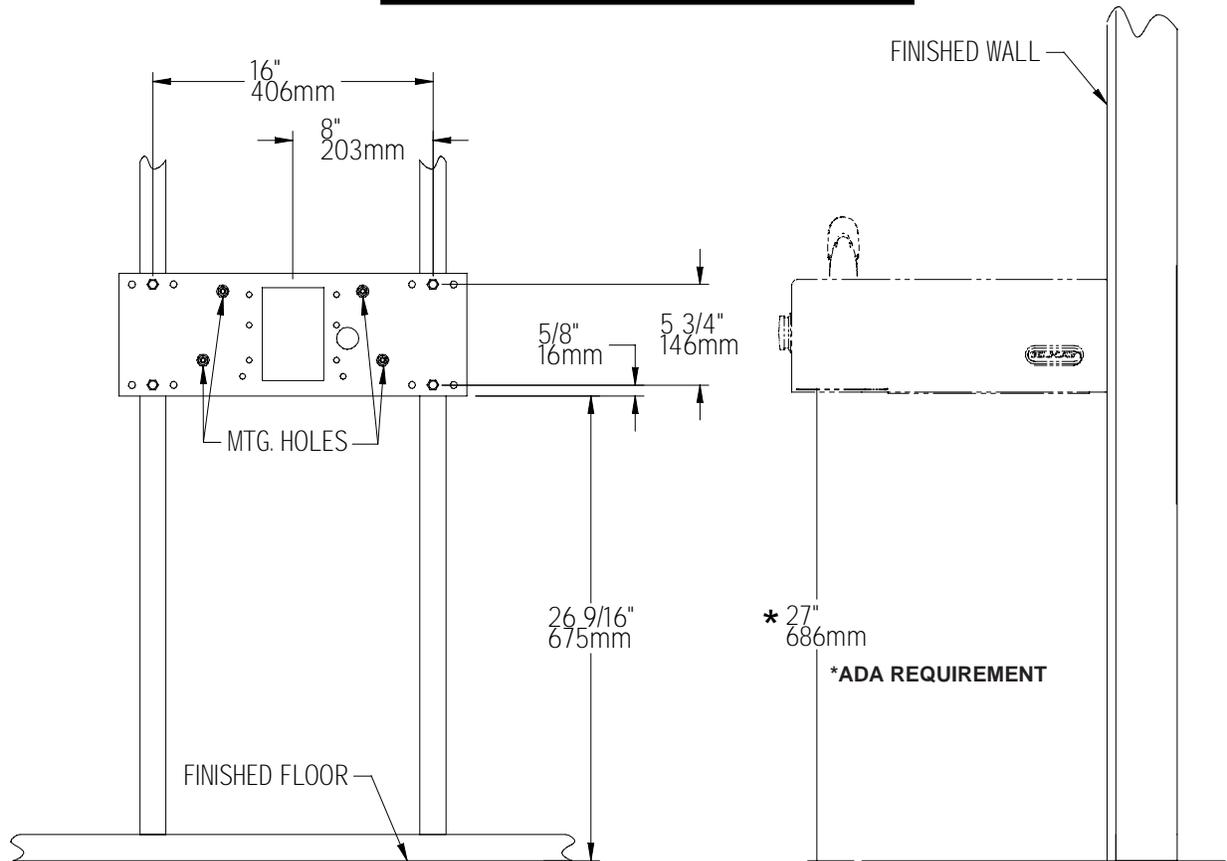

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


Heavy Duty 14 Gauge Drinking Fountain
 Wall-Mount, Fully Exposed
 Barrier Free Access
 Model EHW214C with MPW101 & ML100

ELKAY®


ROUGH-IN DIMENSIONS

When installing EHW214C with MPW101 in-wall plate and ML100 support legs, refer to the diagrams shown below.



For electrical, waste, and water supply locations, refer to the Installation/Owners manual.

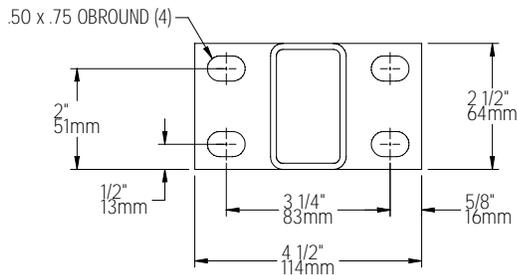

U-BOLTS ARE INCLUDED WITH ML100 (SUPPORT COLUMNS)

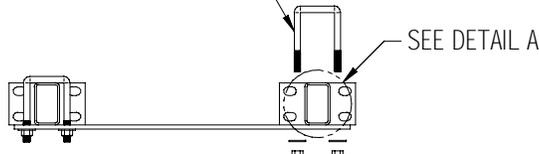

Note - After installation, U-bolts and threaded rods may need to be trimmed.

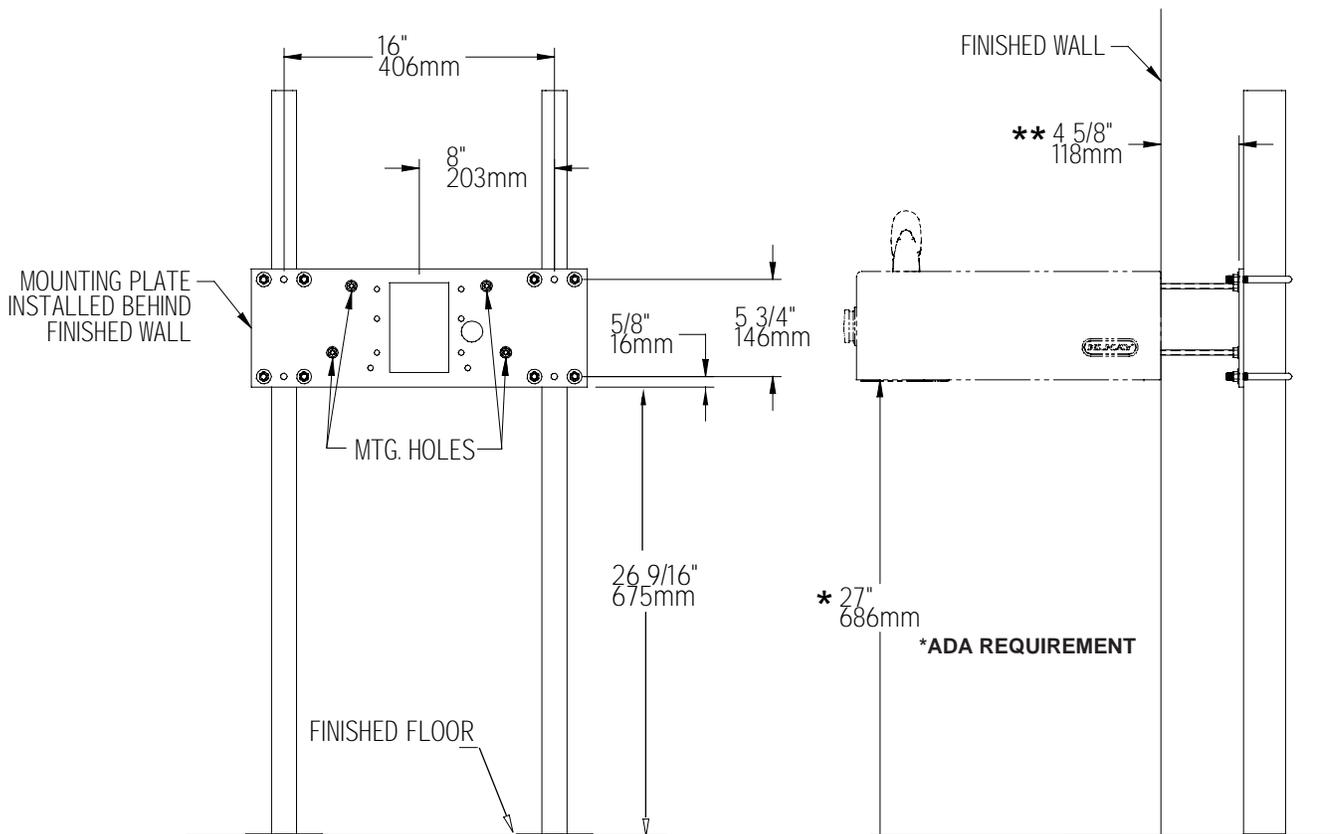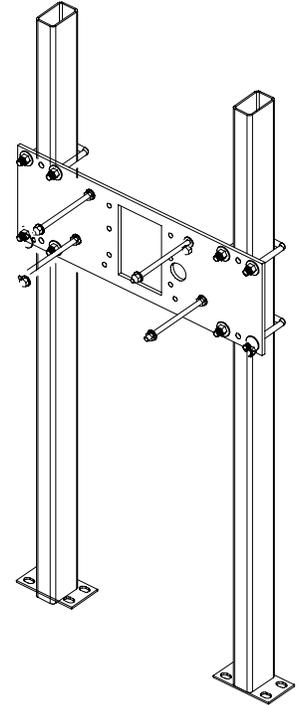

**WITH STANDARD STUD LENGTH OF 6 INCHES