
THE BELLERIA"

FP4320 Series



SPECIFICATION SHEET

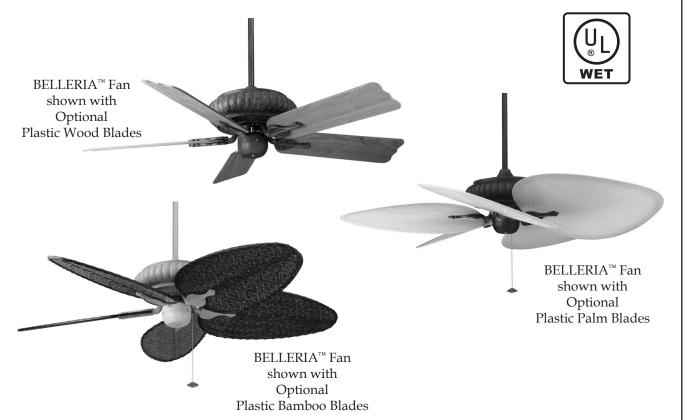

INSTALLATION REQUIREMENTS


Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

Specifications subject to change

The Belleria[™] Fan Assembly - FP4320**



**Available Finishes		
AG	Aged Copper	
AZ	Aged Bronze	
LT	Latte	
ТВ	Textured Black	

Fan Assembly	Α
Fan w/6" downrod	15″
Fan w/12" downrod	21″
Fan w/18" downrod	27″
Fan w/24" downrod	33″
Fan w/36" downrod	39″
Fan w/48" downrod	45″
Fan w/60" downrod	51″
Fan w/72" downrod	57″

Available Plastic Blades			
Palm Leaf	BPP1	Natural - 22" Wide Oval	
Palm Leaf	BPP4	Natural - 22" Narrow Oval	
Woven Bamboo	BPD1A	Antique - 22" Wide Oval	
Woven Bamboo	BPD4A	Antique - 22" Narrow Oval	
Woven Bamboo	BPD4BL	Black - 22" Narrow Oval	
Traditional Wood	BPW10CY	Cherry - 21" Narrow	
Traditional Wood	BPW10WO	Washed Oak - 21" Narrow	

MOTOR:

120 Volts, 60 Hz, 0.90 amps.

FAN SPEED:

3-speed pull-chain with reversing switch (on the motor). Approximate speeds (depending on blade selection) 1st Pull-High – 155 rpm; 2nd Pull-Med – 95 rpm; 3rd-Low – 65 rpm (with BPW blades)

BLADE OPTIONS:

Wet-Location (Plastic - BP, BPD & BPW Series) Palm, Bamboo, and Wood blades are available (sold seperately in sets of 5). See Catalog or visit our website, www.fanimation.com for more information.

DOWN ROD OPTIONS:

The Belleria[™] fan comes with a standard 6" wet-location down rod. Optional wet-location down rods are available in 12", 18", 24", 36", 48", 60", and 72". The Belleria[™] fan can be mounted on a sloped ceiling up to 30°. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. See your dealer for more details.



10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com