







Fixture Name: Trifle 5645-BA1 CH

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
below to be filled out by retailer

<p>Circular Mounting Strap</p>  <p>1 ea Φ102*H1.4mm</p>	<p>Mounting screw</p>  <p>2 ea 8/32-IP*1"</p>	<p>Mounting screw</p>  <p>2 ea 5/32-IP*1-1/4"</p>
<p>Hex nut</p>  <p>2 ea 5/32-IP*H3mm</p>	<p>Wire connector</p>  <p>2 ea A3 Orange</p>	<p>Deco nuts</p>  <p>2 ea 5/32-IP*H9mm</p>

Part Needed	_____	Quantity	_____
Part Needed	_____	Quantity	_____
Reason why	(missing, scratched, broken glass, bent, bad finish)		
Comments	_____		

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Install the light bulbs in accordance with the fixture's specification. Use a tissue or paper towel to hold the bulb and push down into socket. Oils or dirt can cause the bulb life to shorten. rubbing alcohol is recommended to clean the bulbs with if dirty.

2. Place the Glass Shade (H) over the Socket (G).

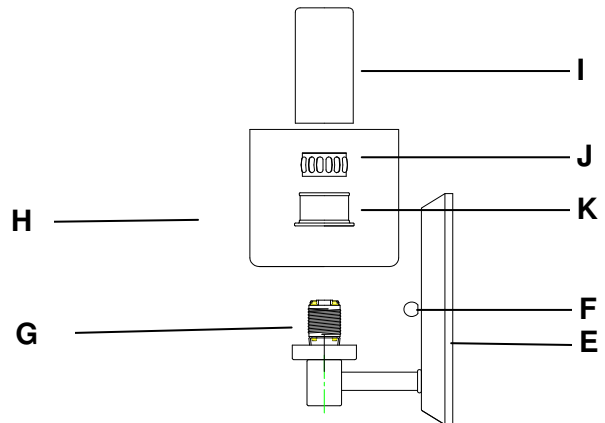
3. Hold the Glass Shade (H) and secure it by threading the Socket Ring (K) onto the Threaded Socket (G) until tight. Wrap the Tension Spring (J) onto the Socket Ring (K) and push the Small Glass (I) gently over the Tension Spring (J).

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

5645-BA1

Fig 1



Replace bulb with a 40W G9 base halogen bulb in accordance with the fixture's specifications.

For Customer Service, contact the place of purchase to arrange for replacement parts.

