


## 27 198 AquaFountain Digital Shower System

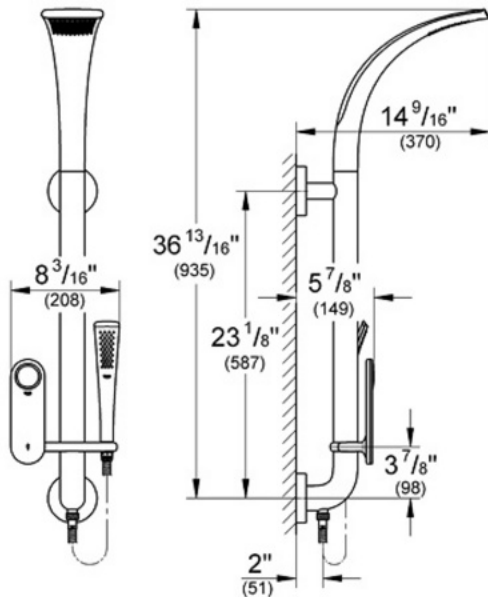

### Description

-AVAILABLE ONLY THROUGH AUTHORIZED GROHE ONDUS SHOWROOMS-

Advance touch operating panel with backlit icons  
Integrated shower head & hand shower design  
Integrated digital display and user-friendly menu navigation

6 function options: digital temperature control  $\pm$ ;  
digital water flow control  $\pm$ ; Start & pause control;  
clock setting; standby design set; and calibration set

2 programmable personalized pre-sets; His & Hers  
Dual-spray shower head (wide spray and ribbon flow) and  
wide spray hand shower

Diverts between shower head (wide spray or ribbon) and  
hand shower

Maximum 2.5 gpm at 80 PSI (9.5 lpm) per outlet

Includes GROHE Ondus hand shower 27 185

Automatic safety shut-off (programmable)

GROHE SafeStop at 100°F

Wall mounted installation

Battery status indicator on display

Extra low voltage supply 6 V DC incl. cable protection  
and cables

Requires concealed thermostat unit 36 072 and  
installation kit 36 077 (sold separately)

### Flow Rate

Maximum 2.5 gpm at 80 PSI (9.5 lpm) per  
outlet

### Code Compliance

ASME/ANSI A112.18.1M

ADA Compliant

### Finish Options

27 198 OOO Starlight® Chrome

27 198 KS0 Velvet Black

27 198 LS0 Moon White

27 198 BS0 Titanium