
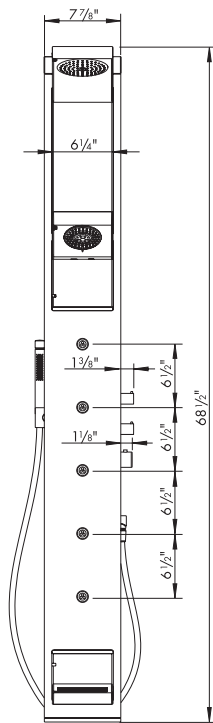


Product Features

- Anodized aluminum panel
- Overhead shower with refreshing full spray, air injection technology
Flow rate 2.5 gpm
- Neck spray with rain, whirl massage, and combination spray modes, air injection technology
Flow rate 2.5 gpm
- 5 Bodysprays
Flow rate 0.72 gpm each
- Axor Starck handshower with full and mono spray modes
Flow rate 2.5 gpm
- Thermostatic temperature control maintains temperature $\pm 1^\circ\text{F}$
- Protection against back siphonage provided by check valves
- Footrest, overhead shower, and neck spray can be folded closed when panel is not in use

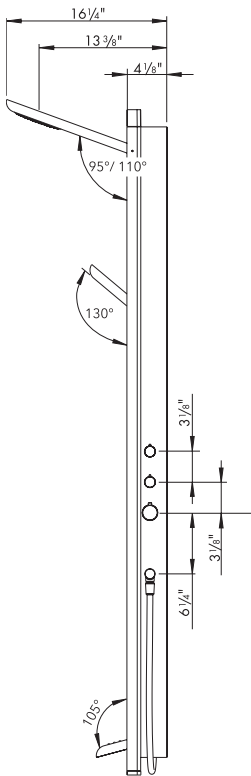

Available Finishes

Satin chrome panel with chrome trim

26017001

Installation Notes

- Requires 1/2" NPT male nipples, extending 5/8" outside the finished wall for the hot and cold supplies – refer to the installation instructions
- The panel hangs on the finished wall.

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 10/2007