
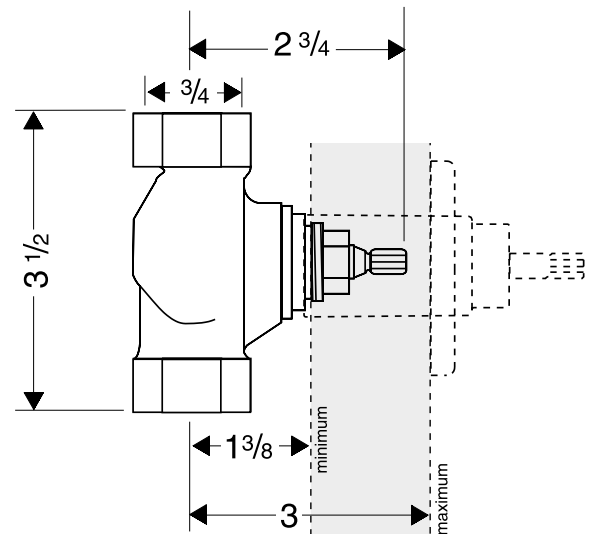


3/4" Volume Control Rough-In 13975181

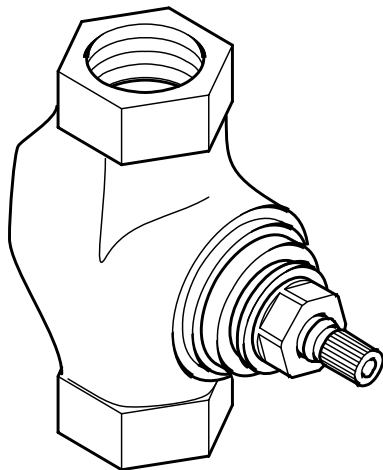

the surface of the finished wall
must fall between the minimum
and maximum lines

Product Specification

Trim kit sold separately

Maximum incoming water pressure	145 PSI
Recommended incoming water pressure	45- 72 psi
Recommended incoming hot water temp.	120° - 140° F**
Nominal capacity @ 45 PSI	13.5* GPM
Ceramic cartridge	

This valve is a volume control - "shutoff" valve only. It does not control the temperature of the water.

Do not use this valve in combination with the 13408181 Equilibrium™ pressure balancing valve

*If this unit is used with a mixing valve, the actual flow rate will be limited to the flow rate of the mixing valve

**Some governing bodies require that the water heater be set to 120° F or less. Please know and follow all applicable local codes when setting the temperature on the water heater.

hansgrohe