
Rough, Trio 3 Port Diverter 15980181

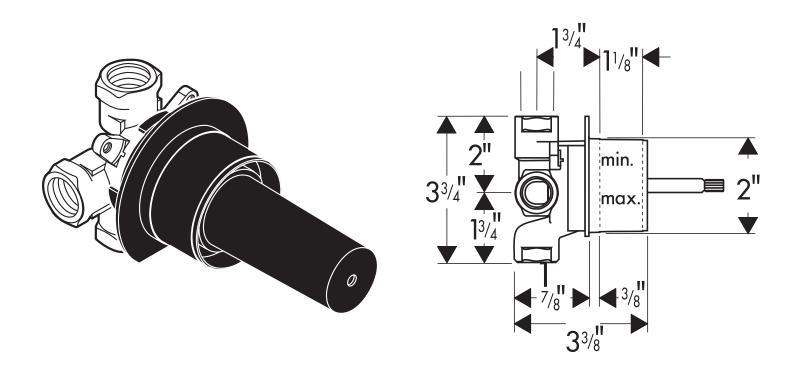

Product Specification

Controls two outlets Outlets can be used individually or in combination Ceramic valve cartridge Max. flow rate 17 gpm* Integral volume control 1/2" NPT female connections Not for use with pressure balancing valve

*Actual flow rate will be limited to that of the mixing valve.

hansgrohe