


Family: Bloom | Item No. 4378 PL



Drawing 1 - Fixture Assembly

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first partially assembling the main body of the fixture, mounting the mounting strap to the junction box, making all necessary electrical connections, hanging the fixture from the ceiling and then completing the assembly of the main fixture.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2


1. Thread nipple (A) of center column assembly (2) into coupler (B), located on the top of the main body assembly (1) - see **Drawing 1**.
2. Starting with the top 3 arms (E) and spread them apart so they are evenly spaced 120 degrees apart.
3. Spread arms (F) of the bottom tier apart until they are equally spaced 60 degrees apart, and are positioned, so that every other arm is between the top tier arms (E).
4. Please refer to **I.S. 19** to properly hang fixture from ceiling. Then refer back to this sheet to continue installation of this fixture.

3

1. Remove socket ring (5) from socket (D) - see **Drawing 2**.
2. Slip glass (4) over socket (D).
3. Thread socket ring (5) onto socket (D) and tighten until snug.
Note: Over tightening ring with a tool may cause damage to the glass.

Note: Maximum wattage for 4378 fixture is 75 watts per bulb.

1.26.09

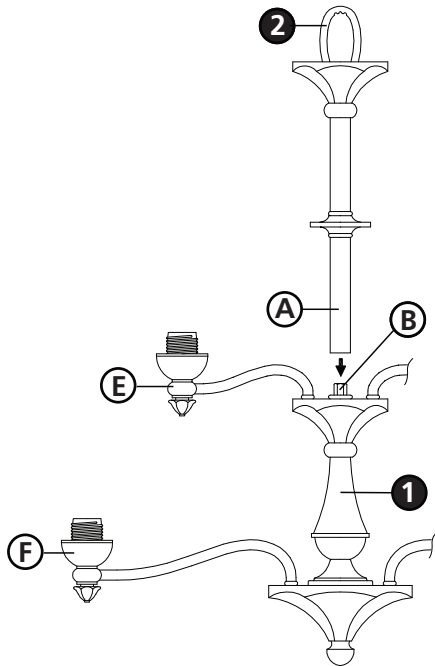

Drawing 2 - Fixture Assembly

