



Family: Freeport | Item No. 1802 OZ



Drawing 1 - Fixture Assembly

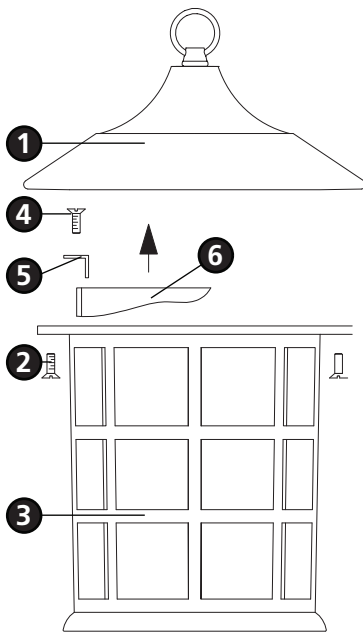

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, and then hanging the fixture from the ceiling.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Remove screws **(2)** from under roof **(1)**. Make sure cage assembly **(3)** is supported while removing screws. When last screw is removed the cage assembly can drop off the fixture - see **Drawing 1**.
2. Remove screws **(4)** that hold the glass clips **(5)** in place.
3. Glass **(6)** can now be lifted out of the cage assembly **(3)**.
4. To replace glass, follow steps 1-3 in reverse order.
5. Please refer to the hanging instruction sheet **(I.S. 20)** provided to complete installation of this fixture.

Note: Maximum wattage for 1802 fixture is 100 watts per bulb.

11.12.09