

# Fuzion 7236 RH Pure Air Bath



Product Codes beginning with: FUZ7236ARL

Also applies to products sold under part numbers: MC10, MC30

## TECHNICAL SPECIFICATIONS

	English	Metric
Outer Dimensions	70 3/4" L x 35 1/2" W x 24" H	1797 mm L x 902 mm W x 610 mm H
Interior Dimensions (bottom of bath) L x W (Mid) x W (End)	48" L x 21 1/2" W x 21 1/2" W	1219 mm L x 546 mm W x 546 mm W
Drain/Blower Configuration	Right hand drain/Left end blower	Right hand drain/Left end blower
Bath Weight (empty)	130 lbs	59 kg
Total Weight/Floor Loading	1,205 lbs 69.3 lbs/ft <sup>2</sup>	547 kg 338.2 kg/m <sup>2</sup>
Operating Gallonage (min-max)	56 (min) 99 (max) U.S. Gals	212 (min) 375 (max) L
Electrical Specifications	<b>Each component requires a separate, dedicated GCFI protected circuit(s)</b>	
Blower		120V 15A 60HZ
Chromotherapy (if selected)		120V 15A 60HZ

## FEATURES, UPGRADES & ACCESSORIES

**Material Type:** High-Gloss Acrylic

**Install Type:** Drop-in with wood frame or Undermount

**Available Colors:** White (W), Almond (A), Oyster (Y), Black (B)

**Cut-out:** 69" x 33" or Undermount Template DD42000

**Standard (Included) Features:**

Chromotherapy lighting, 800w blower, bottom and side air channels, infinity edge overflow, 1 pillow, chrome twist and turn drain (for alternate finishes, replace with standard parts, 1.5" drain elbow)

**Available Control Systems:**

J4 Luxury Control Panel (standard)

J5 Luxury LCD Control Panel

**Available Upgrades:**

900w blower (with J5 LCD Control Panel)

**Available Accessories:**

HB77 Optional Wood Frame (specify wood) 900: Unfinished, 935:

Wenge, 936: Teak


GQ88 Light Chromotherapy Add-on Kit

DD50 Replacement Pillow (specify color) 959: White, 958: Almond, 969: Oyster

**\*Faucet installation note:**


Selecting a faucet for rim mounting: The combined thickness at the rim of the bathtub shell and optional wood deck is 2" (50 mm) nominal. The length of the faucet tailpiece(s) must be long enough to extend past this dimension and have ample clearance to assemble any hardware (i.e. locknut, water supply fittings, etc.) necessary for installation. For undermount units, the combined thickness of the bathtub shell is 1/2" (12 mm) nominal and the undermount deck should not exceed the length of the faucet tailpiece(s), including any assembly hardware.

## KEY DIMENSIONS

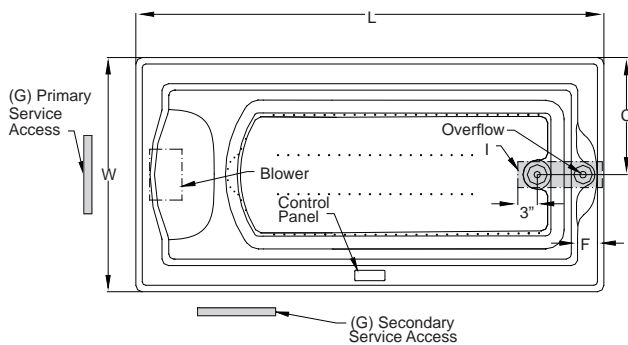


\*Deck width reflects only area indicated on detail.

Letter	Description	English	Metric
L	Outer Length	70 3/4"	1797 mm
W	Outer Width	35 1/2"	902 mm
H	Overall Height**	24"	610 mm
A	Overflow Height	17"	432 mm
B	Long Edge to Drain Center	10 1/4"	260 mm
C	Short Edge to Drain Center	17 11/16"	447 mm
D	Drain Shoe Length	7"	178 mm
E	Deck Height**	4"	102 mm
F	Deck Width*	3"	76 mm
G	Service Access Dimensions	12" H x 18" L	305 mm x 457 mm
I	Floor Cut-out for Drain	12" x 4"	305 mm x 102 mm

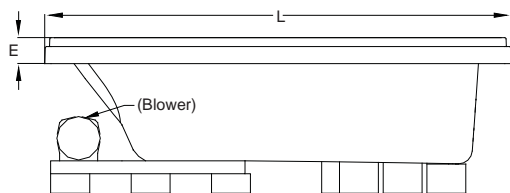


Side View



End View

\*\*Height of tub only, optional wood frame adds 1.25"



Drain/Overflow

NOTE: Graphics May Not be to Scale