

# Fuzion 6666 Pure Air Bath



Product Codes beginning with: FUZ6666ACR

Also applies to products sold under part numbers: MG10, MG30

## TECHNICAL SPECIFICATIONS

	English	Metric
Outer Dimensions	65 3/4" L x 65 3/4" W x 24" H	1670 mm L x 1670 mm W x 610 mm H
Interior Dimensions (bottom of bath) L x W (Mid)	42" L x 42" W	1067 mm W x 1067 mm W
Drain/Blower Configuration	Center drain/Right end blower	Center drain/Right end blower
Bath Weight (empty)	180 lbs	82 kg
Total Weight/Floor Loading	1,763 lbs 58.7 lbs/ft <sup>2</sup>	800 kg 286.5 kg/m <sup>2</sup>
Operating Gallonage (min-max)	74 (min) 148 (max) U.S. Gals	280 (min) 560 (max) L
Electrical Specifications	<b>Each component requires a separate, dedicated GCFI protected circuit(s)</b>	
Blower		120V 15A 60HZ
Chromatherapy (if selected)		120V 15A 60HZ

## FEATURES, UPGRADES & ACCESSORIES

**Material Type:** High-Gloss Acrylic

**Install Type:** Drop-in with wood frame or Undermount

**Available Colors:** White (W), Almond (A), Oyster (Y), Black (B)

**Undermount Cutout Template:** DD43000, See below drop-in diagram

**Standard (Included) Features:**

Chromatherapy lighting, 800w blower, bottom and side air channels, infinity edge overflow, 2 pillows, chrome twist and turn drain (for alternate finishes, replace with standard parts, 1.5" drain elbow)

**Available Control Systems:**

J4 Luxury Control Panel (standard)

J5 Luxury LCD Control Panel

**Available Upgrades:**

900w blower (with J5 LCD Control Panel)

**Available Accessories:**

HB78 Optional Wood Frame (specify wood) 900: Unfinished, 935:

Wenge, 936: Teak


GQ88 Light Chromatherapy Add-on Kit

DD50 Replacement Pillow (specify color) 959: White, 958: Almond, 969: Oyster


**\*Faucet installation note:**

Selecting a faucet for rim mounting: The combined thickness at the rim of the bathtub shell and optional wood deck is 2" (50 mm) nominal. The length of the faucet tailpiece(s) must be long enough to extend past this dimension and have ample clearance to assemble any hardware (i.e. locknut, water supply fittings, etc.) necessary for installation. For undermount units, the combined thickness of the bathtub shell is 1/2" (12 mm) nominal and the undermount deck should not exceed the length of the faucet tailpiece(s), including any assembly hardware.



## KEY DIMENSIONS

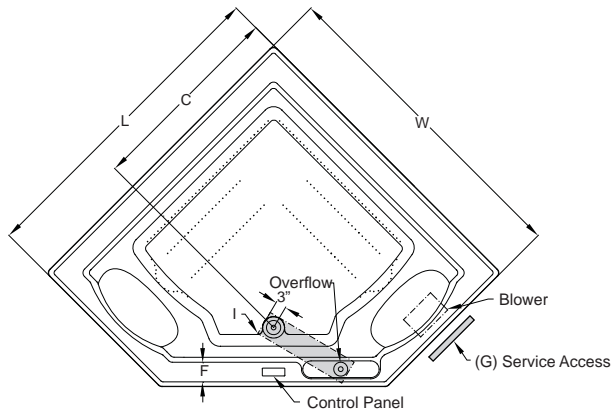


\*Deck width reflects only area indicated on detail.



NOTE: Graphics May Not be to Scale

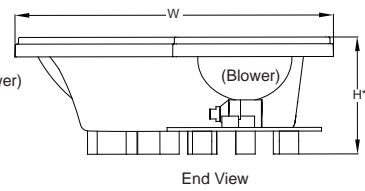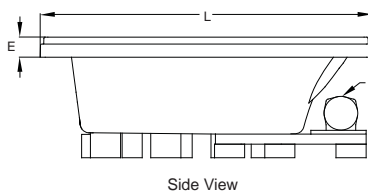

\*\*Height of tub only, optional wood frame adds 1.25"



Letter	Description	English	Metric
L	Outer Length	65 3/4"	1670 mm
W	Outer Width	65 3/4"	1670 mm
H	Overall Height**	24"	610 mm
A	Overflow Height	16 13/16"	427 mm
B	Long Edge to Drain Center	12 1/8"	308 mm
C	Short Edge to Drain Center	40 15/16"	1039 mm
D	Drain Shoe Length	9 1/4"	234 mm
E	Deck Height**	4"	102 mm
F	Deck Width*	3 1/2"	89 mm
G	Service Access Dimensions	12" H x 18" L	305 mm x 457 mm
I	Floor Cut-out for Drain	20" x 4"	508 mm x 102 mm

© 2010 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • [www.jacuzzi.com/technicalspecs](http://www.jacuzzi.com/technicalspecs)

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

HD35000 REL 03/10