


ROUND
LANTERN

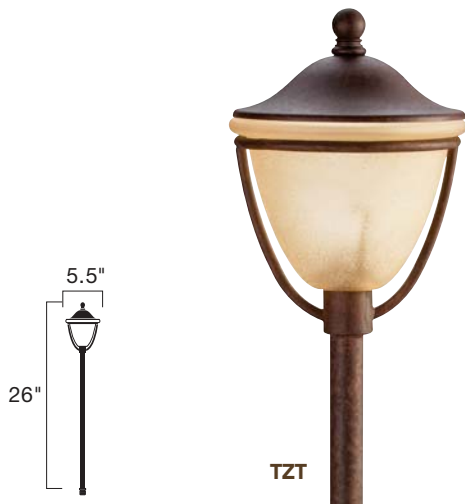

TZT

15367 TZT

TRADITIONAL
MARINE
LANTERN



OZ

OB

15438 OB, OZ

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------|---|--|------|-----|----|-----|-----|----|----|----|----|--------------|------|------|------|-----|----|-----|-----|---|---|--|---------------------|----|----|----|----|----|----|----|----|----|--------------|-----|-----|----|---|---|---|---|---|---|
| Ordering Guide & Finish | 15367 TZT | 15438 OB 15438 OZ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Housing | Cast Aluminum with etched sunset glass | Brass with white polycarbonate diffuser | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Lamp Base | 12V S8 wedge base socket | 12V S8 wedge base socket | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Supplied Lamp | 24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA) | 18.5-W(VA) 3155K (15599 CLR) Krypton light source Power usage at 12V AC input VA MAX: 18.5-W(VA) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Incandescent Lamp Options | 18.5-W(VA) 3155K (15599 CLR) | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LED Lamp Options | 2W (18036-18038) see page 137. Compares up to 18.5W Krypton. | 2W (18036-18038) see page 137. Compares up to 18.5W Krypton. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Wiring | 51" of usable #18-2, SPT-1-W leads. Cable connectors supplied. | 26" of usable #18-2, SPT-1-W leads. Cable connectors supplied. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mounting Access. (Included) | 8" In-ground slotted stake | 8" In-ground slotted stake | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Optional Accessories | 15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket | 15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Notes | U.S. Patent No. D580,084 | Brass will develop natural patina over time | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Photometric with Supplied Lamp | <table border="1"> <tr> <td>Distance from Light</td> <td>1'</td> <td>2'</td> <td>3'</td> <td>4'</td> <td>5'</td> <td>6'</td> <td>7'</td> <td>8'</td> <td>9'</td> </tr> <tr> <td>Foot Candles</td> <td>5.03</td> <td>3.18</td> <td>1.45</td> <td>.68</td> <td>.3</td> <td>.13</td> <td>.03</td> <td>-</td> <td>-</td> </tr> </table> | Distance from Light | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | 9' | Foot Candles | 5.03 | 3.18 | 1.45 | .68 | .3 | .13 | .03 | - | - | <table border="1"> <tr> <td>Distance from Light</td> <td>1'</td> <td>2'</td> <td>3'</td> <td>4'</td> <td>5'</td> <td>6'</td> <td>7'</td> <td>8'</td> <td>9'</td> </tr> <tr> <td>Foot Candles</td> <td>2.9</td> <td>1.2</td> <td>.3</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table> | Distance from Light | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | 9' | Foot Candles | 2.9 | 1.2 | .3 | - | - | - | - | - | - |
| Distance from Light | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | 9' | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Foot Candles | 5.03 | 3.18 | 1.45 | .68 | .3 | .13 | .03 | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Distance from Light | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | 9' | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Foot Candles | 2.9 | 1.2 | .3 | - | - | - | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |