



12V LED/INCANDESCENT PATH & SPREAD

CROSS CREEK™
LANTERN

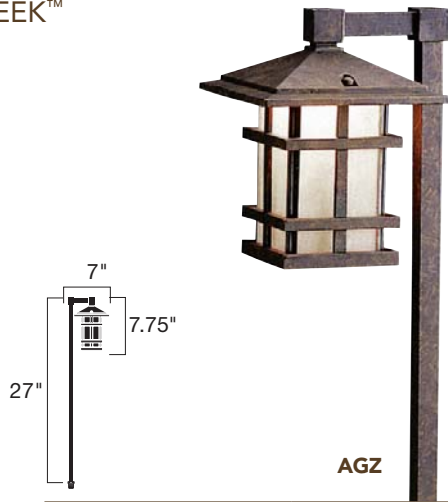

15322 AGZ

MISSION
BOLLARD

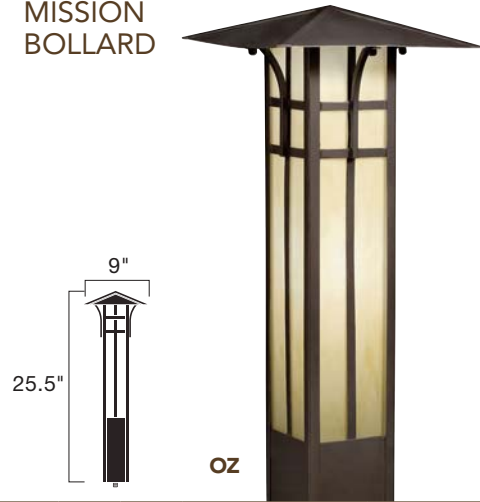

15458 OZ

Ordering Guide & Finish	15322 AGZ	15458 OZ																		
Housing	Cast Aluminum with textured linen seeded glass panels	Brass with honey beige glass																		
Lamp Base	12V T5 wedge base socket	12V T5 wedge base socket																		
Supplied Lamp	16.25-W(VA) 921X (17025) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)	11.6-W(VA) 912X (17023) (qty 2) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)																		
Incandescent Lamp Options	11.6-W(VA) 921X (17023) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021)	16.25-W(VA) 921X (17025) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021) (2 required)																		
LED Lamp Options	2W (18039-18041) see page 137. Compares up to 16W Xenon.	2W (18039-18041) see page 137. Compares up to 16W Xenon.	2W (18120-18121) see page 138. Compares up to 16W Xenon.																	
Wiring	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	22" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																		
Mounting Access. (Included)	8" In-ground slotted stake	8" In-ground slotted stake																		
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	N/A																		
Notes	U.S. Patent No. D580,084	Brass will develop natural patina over time																		
Photometric with Supplied Lamp	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
	Bottom	3.2	1.2	.26	-	-	-	-	-	-	Foot Candles	0.44	1.81	1.26	0.70	0.39	0.25	0.16	0.12	0.10