


6' (1.8 m) BATH WHIRLPOOL K-1124

Features

- Acrylic
- 8 color-matched jets
- 1.25 hp pump with air switch and grounding-type plug-in cord
- Slotted overflow for maximum bathing depth
- Low threshold height
- Integral lumbar support
- Armrests
- 72" (182.9 cm) x 36" (91.4 cm) x 19" (48.3 cm)

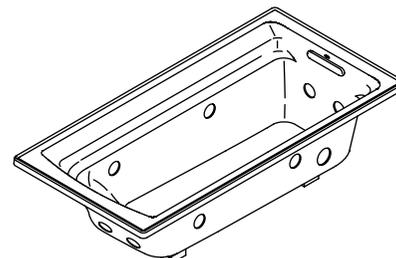

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- Underwriters Laboratories (UL)
- ASME A112.19.7M

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/Finishes | |
|-----------------------------|-----------------------------------|-----------------------------|-------------------------------------|
| K-1124 | 6' (1.8 m) drop-in bath whirlpool | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |
| Required Accessories | | | |
| K-7272 | Bath drain | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ |
| Optional Accessories | | | |
| K-9259 | Removable bath seat | <input type="checkbox"/> 0 | |

Product Specification:

The bath whirlpool shall be 72" (182.9 cm) in length, 36" (91.4 cm) in width, and 19" (48.3 cm) in height. Bath whirlpool shall be made of acrylic. Bath whirlpool shall have 8 color-matched jets, and 1.25 hp pump with air switch and grounding-type plug-in cord. Bath whirlpool shall have slotted overflow for maximum bathing depth, low threshold height, and integral lumbar support. Bath shall have armrests. Bath whirlpool shall be Kohler Model K-1124-_____.

ARCHER™

Technical Information

| Fixture*: | basin area | top area | weight |
|--------------|---|---|--------------------|
| Bathing well | 51-3/8" (130.5 cm) x 21" (53.3 cm) | 64-1/2" (163.8 cm) x 30-1/2" (77.5 cm) | 110 lbs (50 kg) |
| To overflow | water depth | capacity | |
| | 15" (38.1 cm) | 72 gal (273 L) | |

* Approximate measurements for comparison only.

| Pump: | Hp | V | Hz | A |
|--|------|-----|----------|---|
| 1-speed | 1.25 | 120 | 60 | 7 |
| Pump is supplied with 24" (61 cm) grounding-type plug-in cord. | | | | |
| Minimum access panel pump/control: | | | | |
| 20" (50.8 cm) W x 15" (38.1 cm) H | | | required | |

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.

Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 52 lbs/square foot (253 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

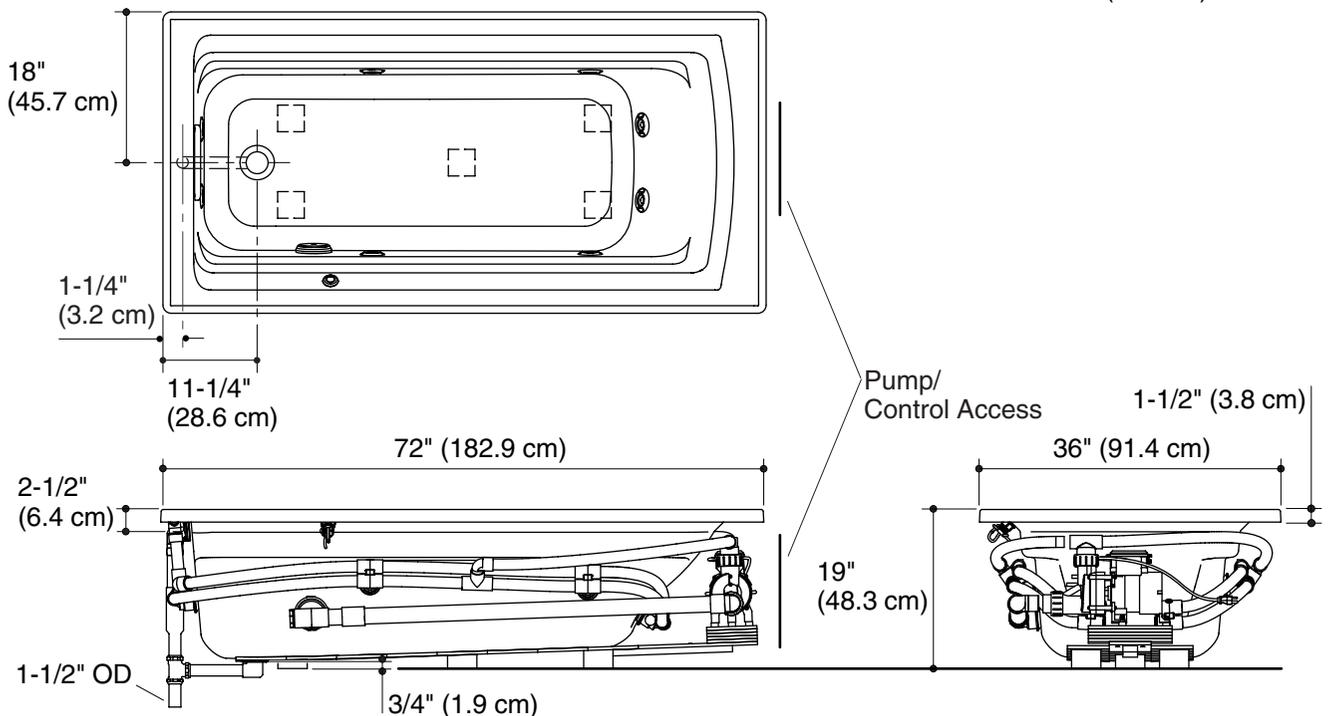

Product Diagram

ARCHER™ 6' (1.8 m) BATH WHIRLPOOL

Page 2 of 2
1071364-4-A

THE BOLD LOOK
OF **KOHLER**®