


## PROFLEX™ 6040 OVAL

### Features

- Acrylic
- Oval shape
- Drop-in
- 6 individually adjustable ProFlex™ hydro-massage jets
- 1-1/4 HP pump with air switch and cord with plug
- Molded lumbar supports and armrests
- UL listed
- Optional K-9696 whirlpool trim kit in various finishes
- Optional K-1639 timer kit
- 60" (152.4 cm) x 40" (101.6 cm) x 17-5/8" (44.8 cm)

### ACRYLIC CUSTOM BATH WHIRLPOOL K-1146-CK/-CN

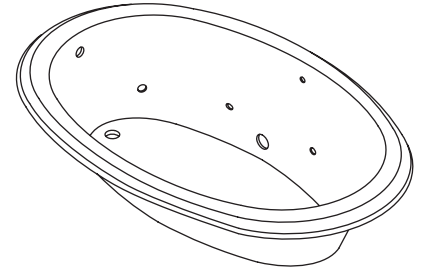

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ANSI Z124.1
- IAPMO/UPC
- Underwriter's Laboratories (UL)
- Listed in State of Massachusetts

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: Not applicable

### Specified Model

Model	Description	Colors/Finishes	
K-1146-CK	Whirlpool, custom pump (top view shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1146-CN	Whirlpool, drop-in, custom pump (shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
Recommended Accessory			
K-11677	Drain	<input type="checkbox"/> CP	
Optional Accessories			
K-9696	Jet trim kit (Metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
K-1639	Timer Kit	<input type="checkbox"/> NA	

### Product Specification:

The oval shaped bath whirlpool shall be 60" (152.4 cm) in length, 40" (101.6 cm) in width, and 17-5/8" (44.8 cm) in height. Drop-in bath whirlpool shall be made of acrylic. Bath whirlpool shall have 6 individually adjustable ProFlex hydro-massage jets, 1-1/4 HP pump with air switch and cord with plug. Bath whirlpool shall have molded lumbar supports and armrests. Bath whirlpool shall be UL listed. Bath whirlpool shall have optional K-9696 trim kit. Bath whirlpool shall have optional K-1639 timer kit. Bath whirlpool shall be Kohler Model K-1146-\_\_\_\_\_-\_\_\_\_\_.

# PROFLEX™ 6040 OVAL

## Technical Information

Fixture:*	basin area	top area	weight
Bathing well	46" (116.8 cm) x 19" (48.3 cm)	55" (139.7 cm) x 29" (73.7 cm)	56 lbs. (25.4 kg)
	water depth	capacity	
To overflow	14" (35.6 cm)	54 gal. (204.4 L)	

\* Approximate measurements for comparison only.

Pump:	HP	V	Hz	A
1-speed	1-1/4	120	60	7.5

Included Components:	
Cut-out template	114859-7

## Required Electrical Service

Dedicated circuit required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.	

## Installation Notes


Install this product according to the installation guide.

No change in measurements is required if the unit is connected with the K-11677 or K-11677M drain as illustrated.

Floor support under whirlpool must provide for a minimum of 80 lbs./square foot (390 kg/square meter) loading.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

A minimum access panel is required as illustrated. This should be 20" (50.8 cm) wide and 15" (38.1 cm) high. Locate the access panel at the pump location.

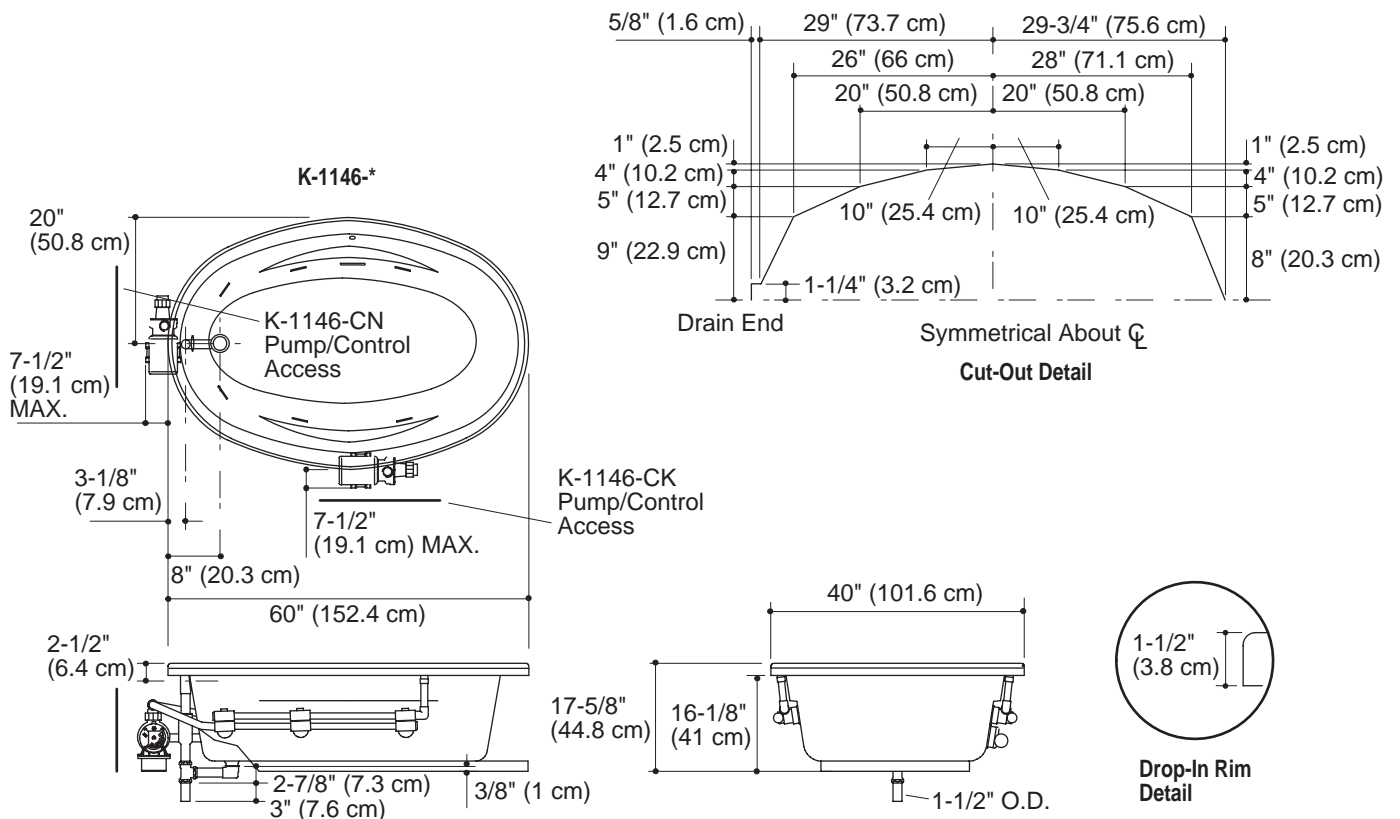

## Product Diagram