

# **PROFLEX™ 5454 CORNER**

K-1155, K-1155-F

**ACRYLIC BATH** 


## **FEATURES**

- 54" (137.2cm) x 54" (137.2cm) x 20-1/2" (52.1cm)
- Acrylic
- Drop-in or corner alcove
- · Molded lumbar supports and armrests
- Optional K-1491 removable pillow

# **CODES/STANDARDS APPLICABLE**

Specified model meets or exceeds the following:

- ANSI Z124.1
- CABO/ANSI A117.1
- IAPMO/UPC
- State of Massachusetts

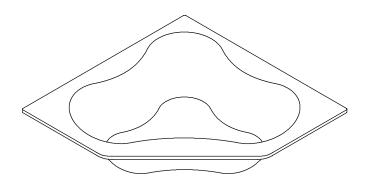

# **COLORS/FINISHES**

- 0 White
- Other Refer to Fixtures Price Book for additional colors

#### Accessories:

- CP Polished Chrome
- PB Polished Brass

## **SPECIFIED MODEL:**

Model	Description	Colors	Colors/Finishes		
K-1155	Bath, drop-in (shown)	□0 White	□Other		
K-1155-F	Bath, tile flange	□0 White	□Other		
Recommended Accessories					
K-11677	Drain	□СР	□РВ		
Optional Accessories					
K-1491	Pillow	□0 White	□Other		

PRODUCT SPECIFICATION:
The bath shall be 54" (137.2cm) in length, 54" (137.2cm) in width, and 20-1/2" (52.1cm) in height. Bath shall be made of acrylic, drop-in or corner alcove installation. Bath shall have molded lumbar supports and armrests. Bath shall be Kohl Model K-1155

# **PROFLEX™ 5454 CORNER**

## PRODUCT INFORMATION


Fixture*:	basin area	top area	weight		
Bathing well	44" (111.8cm) x 36" (91.4cm)	56" (142.2cm) x 43" (109.2cm)	51 lbs. (23.1 kg)		
	water depth	capacity			
To overflow	15" (38.1cm)	76 gal. (288 L)			
* Approximate measurements for comparison only.					

#### INSTALLATION NOTES

Install this product according to the installation guide.

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Floor support under bath must provide for a minimum of 80 lbs./square foot (390 kg./square meter) loading.

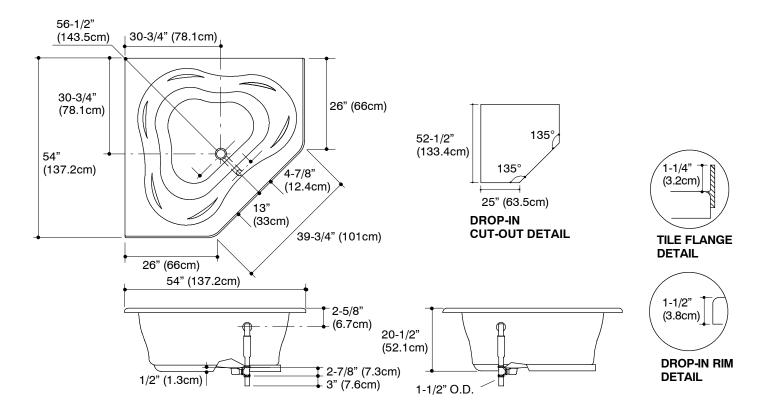

PRODUCT DIAGRAM

