


Features

- Acrylic
- UL listed
- 1-1/4 hp pump with air switch and grounding-type plug-in cord
- In-line heater
- Integral apron with removable access panel
- 5 individually adjustable ProFlex hydro-massage jets
- 66" (167.6 cm) x 36" (91.4 cm) x 20" (50.8 cm)
- Optional K-1639 timer kit
- Optional K-9695 whirlpool trim kit in various finishes

5.5' BATH WHIRLPOOL K-1224-HL/-HR

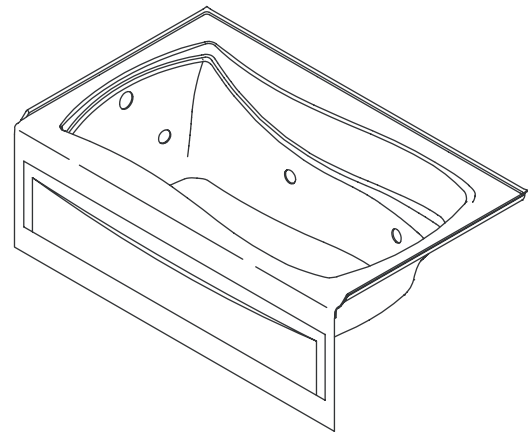

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1
- ASME A112.19.7
- IAPMO/UPC
- Underwriter's Laboratories (UL)
- Listed in State of Massachusetts

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-1224-HL	Whirlpool, left drain hole, integral apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-1224-HR	Whirlpool, right drain hole, integral apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
Recommended Accessory				
K-7161-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-9695	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-1639	Timer kit	<input type="checkbox"/> NA		

Product Specification:

The bath whirlpool shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 20" (50.8 cm) in height. Bath whirlpool shall be made of acrylic. Bath whirlpool shall have 5 individually adjustable Proflex hydro-massage jets, 1-1/4 HP pump with air switch and cord with plug and in-line heater with in-line heater with cord and plug. Bath whirlpool shall be UL listed. Bath whirlpool shall have optional K-9695 trim kit. Bath whirlpool shall have optional K-1639 timer kit. Bath whirlpool shall be Kohler Model K-1224-____-____.

MARIPOSA™

Technical Information

Fixture:*	basin area	top area	weight
Bathing well	48" (121.9 cm) x 24" (61 cm)	59" (149.9 cm) x 30" (76.2 cm)	110 lbs. (49.9 kg)
	water depth	capacity	
To overflow	14" (35.6 cm)	67 gal. (254 L)	

* Approximate measurements for comparison only.

Pump	HP	Voltage	Frequency	Amperage
1-speed	1-1/4	120 V	60 Hz	12.5
Heater	kW	V	Hz	A
	1.5	120 V	60	12.5

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Required Electrical Service

Two dedicated circuits are required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI).

Pump/control 120 V, 15 A, 60 Hz

Heater 120 V, 15 A, 60 Hz


Locate the outlets behind the whirlpool and within 24" (61 cm) of the pump and heater.

Installation Notes

Install this product according to the installation guide.



Floor support under the whirlpool must provide for a minimum of 80 lbs./square foot (390 kg./square meter) loading.

If installing a rim mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

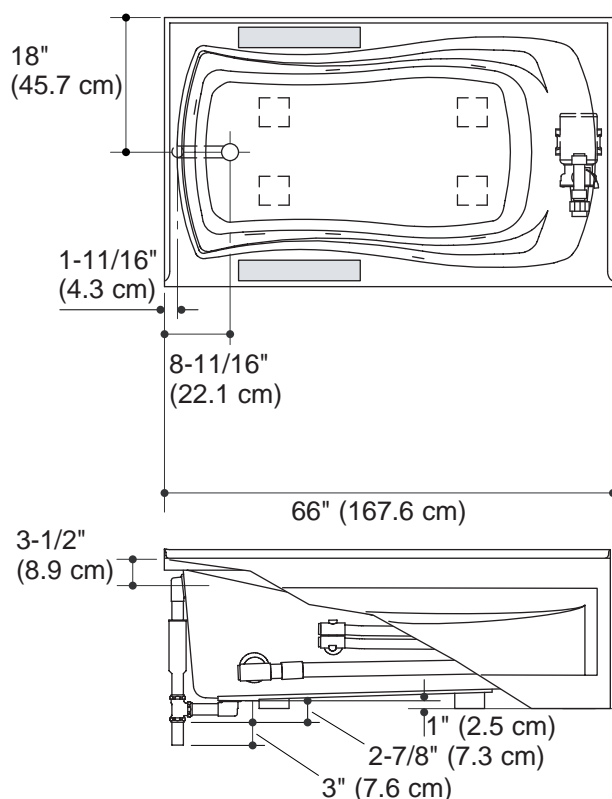

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

Recommended faucet area.

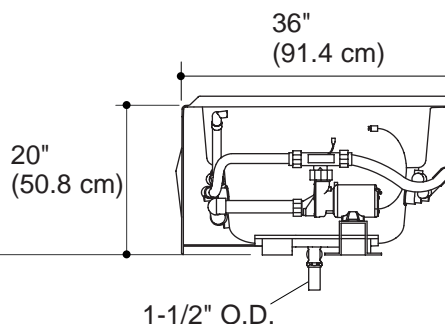

Product Diagram