


MARIPOSA™ 6' BUBBLEMASSAGE™

Features

- Integral apron with removable access panel
- Acrylic
- UL listed
- Optional K-1491 removable pillow
- Integral tile flange
- Left or right drain
- 120 BubbleMassage™ airjets
- 1 hp blower with electronic control
- Blower motor is supplied with a grounding-type plug-in cord
- Optional Model K-1601 removable footstop
- 72" (182.9 cm) x 36" (91.4 cm) x 20" (50.8 cm)

BATH WITH AIRJETS, WITH INTEGRAL APRON K-1257-GLA ALSO K-1257-GRA

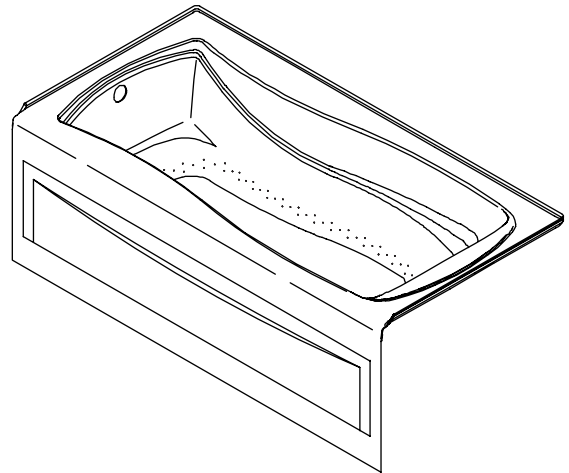

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1
- IAPMO/UPC IGC 171
- Underwriter's Laboratories (UL)

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1257-GLA	Bath with airjets, with left drain, integral apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-1257-GRA	Bath with airjets, with right drain, integral apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7166-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1491	Removable pillow	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-1601	Removable footstop	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-1446	Remote blower installation kit	NA		

Product Specification

The bath with airjets shall be 72" (182.9 cm) in length, 36" (91.4 cm) in width, and 20" (50.8 cm) in height. Bath shall be made of acrylic and shall have an integral apron. Bath shall have a 1 hp blower motor with 300 W heater and an electronic user control. The blower motor shall have a grounding-type plug-in cord. Bath shall have 120 airjets. Bath shall be UL listed. The bath shall have a removable pillow and a removable footstop as options. The bath with airjets shall be Kohler Model K-1257-G____-_____.

MARIPOSA™ 6' BUBBLEMASSAGE™

Technical Information

Fixture:*	basin area	top area	weight
Bathing well	50" (127 cm) x 24" (61 cm)	65" (165.1 cm) x 27" (68.6 cm)	109 lbs (49.4 kg)
To overflow	14" (35.6 cm)	capacity	
		72 gal. (272.5 L)	

* Approximate measurements for comparison only.

Blower motor:	Heater	Voltage	Frequency	Amperage
1 Hp	300 W	120 V	60 Hz	5 A

Required Electrical Service


Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (61 cm) grounding-type plug-in cord.	

Installation Notes

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 80 lbs/square foot (390 kg/square meter).

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

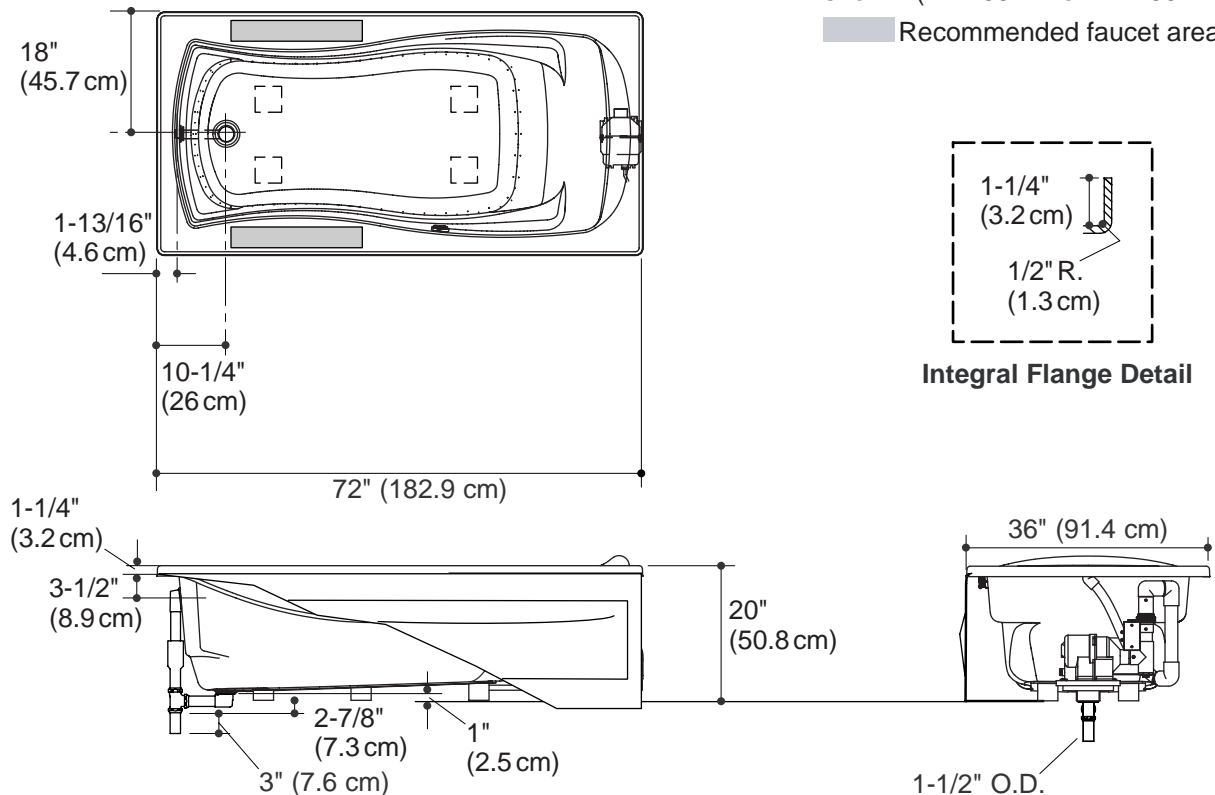

No change in measurements with drain shown. (K-7166-AF or K-7166M-AF)

Recommended faucet area.

Product Diagram