


K-1492-H2

FEATURES

- 48" (121.9cm) x 32" (81.3cm) x 23-3/8" (59.4cm)
- Acrylic
- 1.5 hp variable speed pump with 1.5 kW heater, and back-lit user control
- 4 Flexjets
- UL Listed
- LESS ALL TRIM
- With *Repose™* vinyl bath pillow
- Optional K-1495 front apron

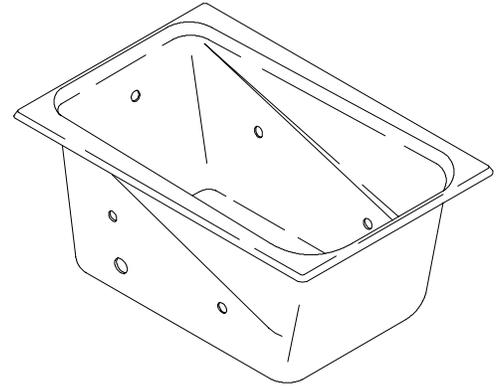

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ANSI Z124.1
- ASME/ANSI A112.19.7M
- IAPMO/UPC
- Underwriters Laboratories (UL)

COLORS/FINISHES

- 0 White
- Other Refer to Price Book for additional colors

Accessories:

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Price Book for additional finishes
- NA None Applicable

SPECIFIED MODEL:

Model	Description	Colors/Finishes		
K-1492-H2	Bath whirlpool	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
Required Accessories				
K-9694	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
Recommended Accessories				
K-7163	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
Optional Accessories				
K-1495	Apron (non-removable)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
K-1179	Vinyl tiling-in bead (use when wall material contacts any top surface of bath)	<input type="checkbox"/> NA		
K-1491	Pillow	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
K-1601	Footstop	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
K-1703	Remote control	<input type="checkbox"/> NA		

PRODUCT SPECIFICATION:

The bath whirlpool shall be 48" (121.9cm) in length, 32" (81.3cm) in width, and 23-3/8" (59.4cm) in height. Bath whirlpool shall be made of acrylic. Bath whirlpool shall have 4 Flexjets, 1.5 hp variable speed pump, 1.5 kW heater, and back-lit user control. Bath whirlpool shall be UL listed. Bath whirlpool shall include *Repose™* vinyl bath pillow. Bath whirlpool shall have optional K-1495 front apron. Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-1492-_____-_____.

PRODUCT INFORMATION

Fixture*:	basin area	top area	weight
Bathing well	36" (91.4cm) x 20-1/2" (52.1cm)	42" (106.7cm) x 26" (66cm)	103 lbs. (46.7kg)
	water depth	capacity	
To overflow	17-1/2" (44.5cm)	68 gal. (257.4L)	

* Approximate measurements for comparison only.

Pump	Heater	Voltage	Frequency	Amperage
1.5 HP	1.5 kW	240 V	50/60 Hz	11 A

REQUIRED ELECTRICAL SERVICE

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump/control	220/240 V, 20 A, 50/60 Hz
--------------	---------------------------

INSTALLATION NOTES


Note: Pump protrusion beyond rim.

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 1000 lbs. (453.6kg)

Hot water supply should be 70% of capacity or greater. Installations will vary.

NOTE: PUMP PROTRUSION BEYOND RIM

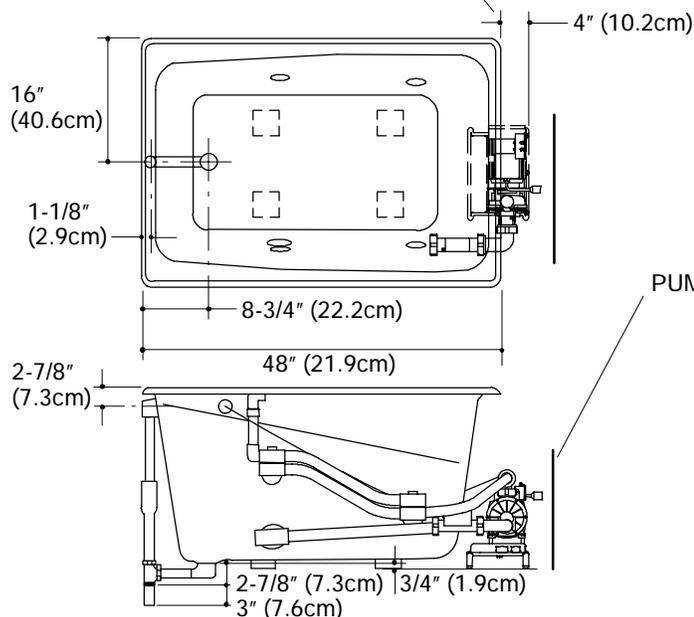


No change in measurements if connected with drain illustrated. (K-7163 or K-7163M)

Drop-in cut-out	46-1/2" (118.1cm) x 30-1/2" (77.5cm)
-----------------	--------------------------------------

Minimum access panel:

Pump/control	34" (86.4cm) W x 15" (38.1cm) H	required
--------------	---------------------------------	----------

PUMP/CONTROL ACCESS

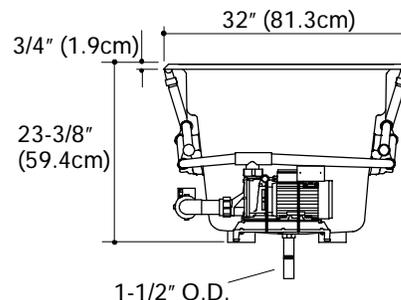

PRODUCT DIAGRAM