

### Features

- Brass construction.
- Single-hole mounting.
- Above-counter battery and valve for easy installation and maintenance.
- Vandal-resistant aerator.
- 24" (610 mm) flexible supply hoses for easy installation.
- 5" (127 mm) spout reach.
- Stationary spout.
- Without temperature mixer.
- Includes two AAA batteries.
- Less drain.
- 0.5 gal/min (1.9 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



ADA CSA B651 OBC

### Codes/Standards



ASME A112.18.1/CSA B125.1  
NSF 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC


### KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless

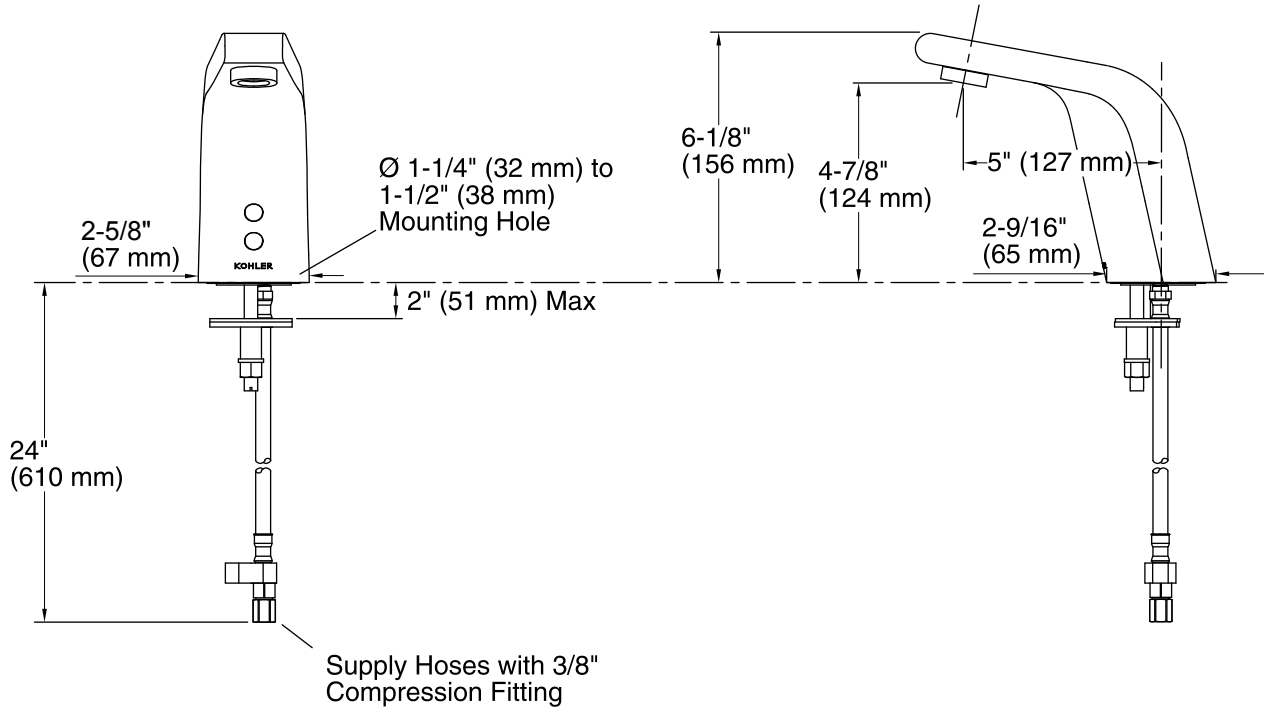

### Technical Information

All product dimensions are nominal.

Valve body: Machined Brass

### Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Power source: AAA 1.5 V, included

### Notes

Install this product according to the installation guide.

A  $1\text{-}1/4\text{'' (32 mm)}$  minimum to  $1\text{-}1/2\text{'' (38 mm)}$  maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be  $1\text{-}3/4\text{'' (44 mm)}$ . This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be  $1\text{-}3/4\text{'' (44 mm)}$ .

The maximum height of the lip basin should be  $3/4\text{'' (19 mm)}$ .

Product includes rosebud spray aerator. Other aerator styles are available.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.