


Features

- Acrylic
- Drop-in or undermount installation
- Two raised corner seats, at 6-3/4" (17.1 cm) and 11-7/8" (30.2 cm) from bath floor
- 8 fully adjustable Flexjet™ whirlpool jets
- Variable speed pump with 1.5kW heater and back-lit user keypad and remote control
- 27-1/2" (69.9 cm) soaking depth
- 48" (121.9 cm) x 48" (121.9 cm) x 34" (86.4 cm)

CUBE BATH WHIRLPOOL WITH HEATER K-1969-H2

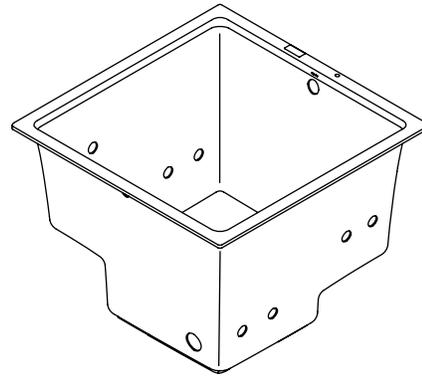

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1.2
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1969-H2	Cube bath whirlpool with heater	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-8150	Cable drain	<input type="checkbox"/> NA		
K-8134	Drain trim kit		<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
Optional Accessories				
K-578	Undermount kit	<input type="checkbox"/> NA		

Product Specification

The bath whirlpool shall be 48" (121.9 cm) in length, 48" (121.9 cm) in width, and 34" (86.4 cm) in height. Bath shall be made of acrylic. Bath shall be for drop-in or undermount installation. Bath shall have two raised corner seats, at 6-3/4" (17.1 cm) and 11-7/8" (30.2 cm) from bath floor. Bath shall have a variable speed pump with 1.5kW heater and electronic back-lit user keypad and remote control. Bath shall have 8 fully adjustable Flexjet whirlpool jets. Bath shall have a 27-1/2" (69.9 cm) soaking depth. Bath shall be Kohler Model K-1969-H2-_____.

UNDERScore®

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	39-3/8" (100 cm) x 39-3/8" (100 cm)			
Basin area, top	44-5/8" (113.3 cm) x 44-5/8" (113.3 cm)			
Weight	150 lbs (68 kg)			
To overflow:				
Water depth	27-1/2" (69.9 cm)			
Capacity	171 gal (647.3 L)			
* Approximate measurements for comparison only.				
Drop-in cut-out		47" (119.4 cm) x 47" (119.4 cm)		
Pump	kW	V	Hz	A
Variable-speed	1.5	240	50/60	15

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):


Pump/control: 220-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 100 lbs/square foot (489 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

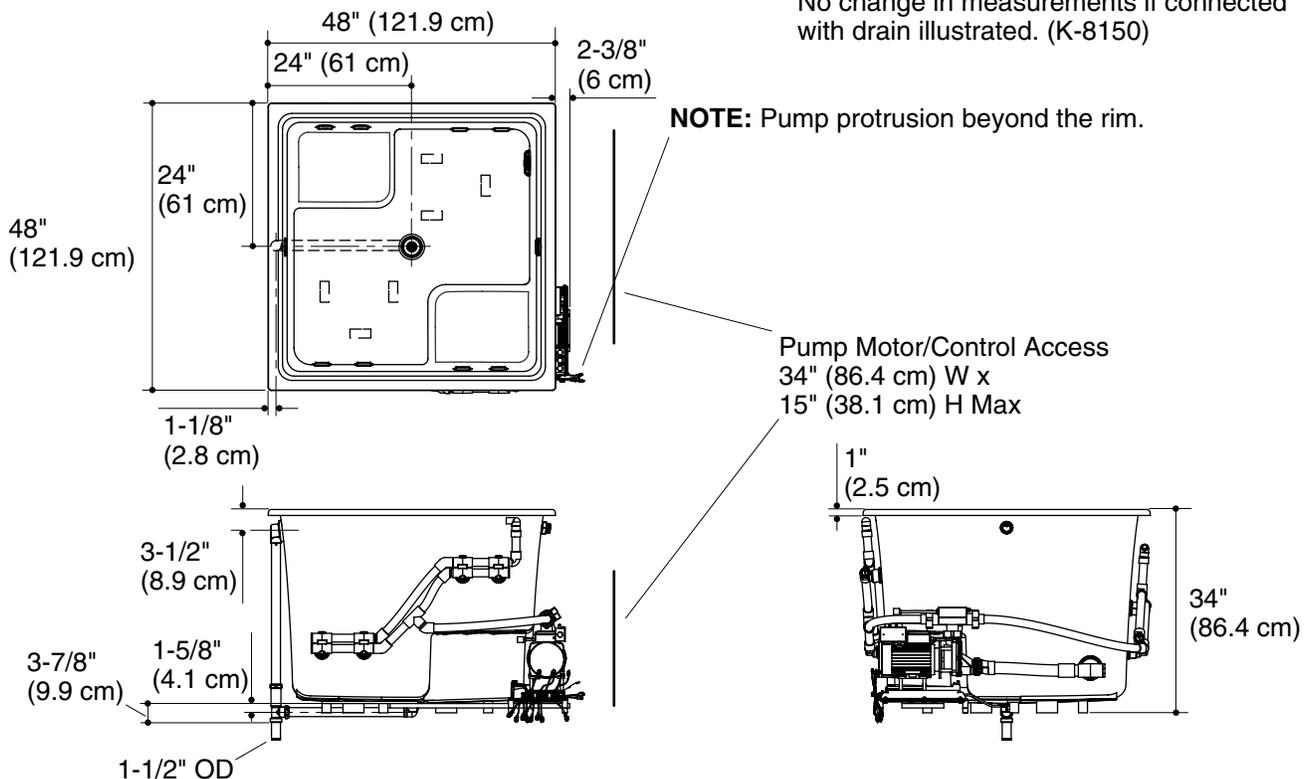

Product Diagram