

All information in these instructions are based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

BEFORE YOU BEGIN

These instructions are for installing the lavatory to wood frame construction. For other installations, supply suitable bracing and fastening devices of sufficient size and strength. Make sure you refer to the proper roughing-in drawing when installing the lavatory.

IMPORTANT: Make sure that the wall and floor are square and plumb to ensure proper installation.

REQUIRED MATERIALS/TOOLS

- Level
- Drill with 1/4" bit
- 9/16" wrench
- Framing square
- Vise grip pliers
- Channel lock pliers
- Tape measure

ORDERING INFORMATION

K-2011 Pedestal lavatory w/transitional pedestal


K-2013 Pedestal lavatory w/traditional pedestal

TABLE OF CONTENTS

K-2011 Refer to Fig. #1 for Roughing-in;
proceed to Page 4 for installation.

K-2013 Refer to Fig. #2 for Roughing-in;
proceed to Page 4 for installation.

ROUGHING-IN DIMENSIONS K-2011

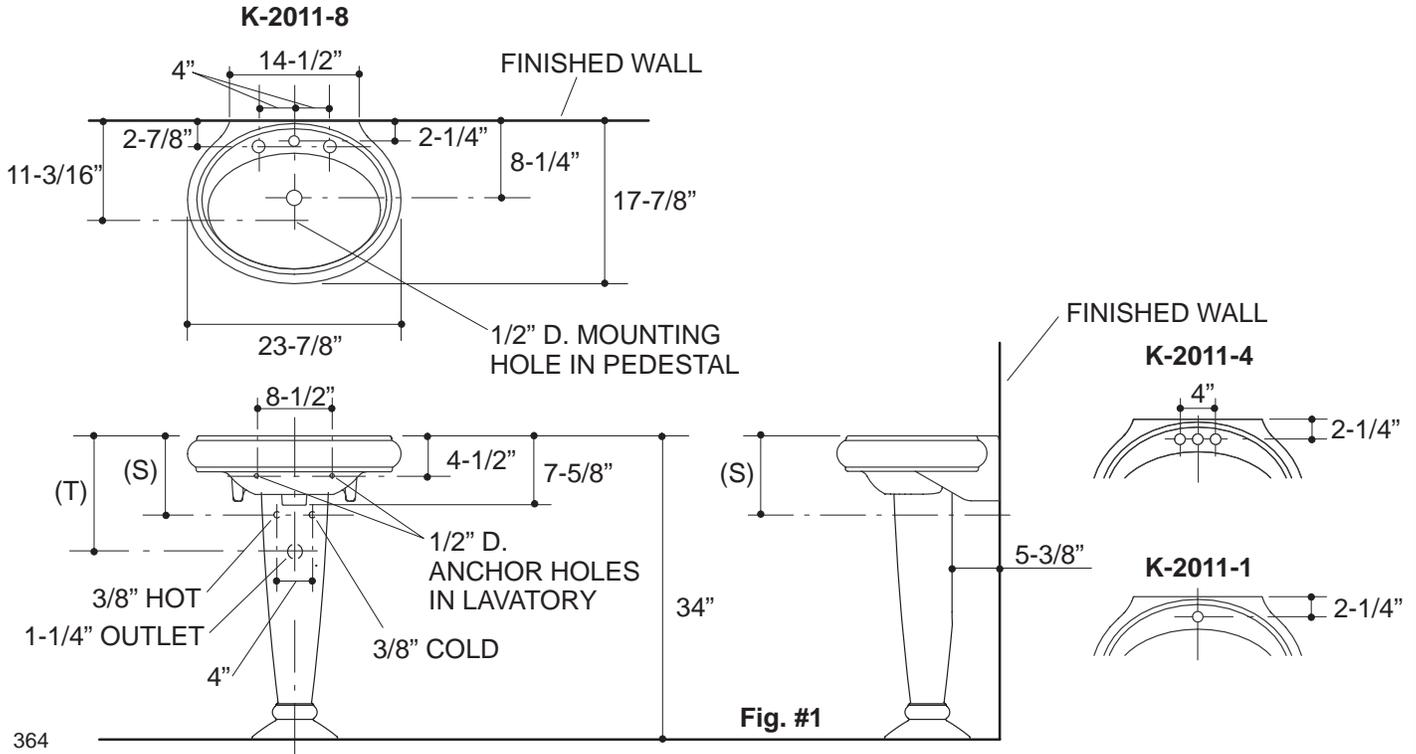

Ordering Information

Accessories/hardware:		
Supplies 3/8" (pair)	K-7605-P	recommended
Trap	K-9018	recommended

Product Information

Fixture*:		basin area	water depth
Lavatory		18" x 11"	3-3/4"
Outlet	1-3/4" D.		

* Approximate measurements for comparison only.

Holes	K-2011-8	K-2011-4	K-2011-1
Spout	1-3/16" D.	1-3/16" D.	1-3/8" D.
Faucet	1-7/16" D.	1-3/16" D.	

Included Components:	
Lavatory basin, 8" centers	K-2008-8
Lavatory basin, 4" centers	K-2008-4
Lavatory basin, single-hole	K-2008-1
Pedestal	K-2003
Rubber pads	63069
Lavatory accessory pack	84017


Roughing-In Notes

Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2M.

(T) Pop-up drain typically 13-1/4".

(S) 10" (Based on 12" riser which may require cutting).

ROUGHING-IN DIMENSIONS K-2013

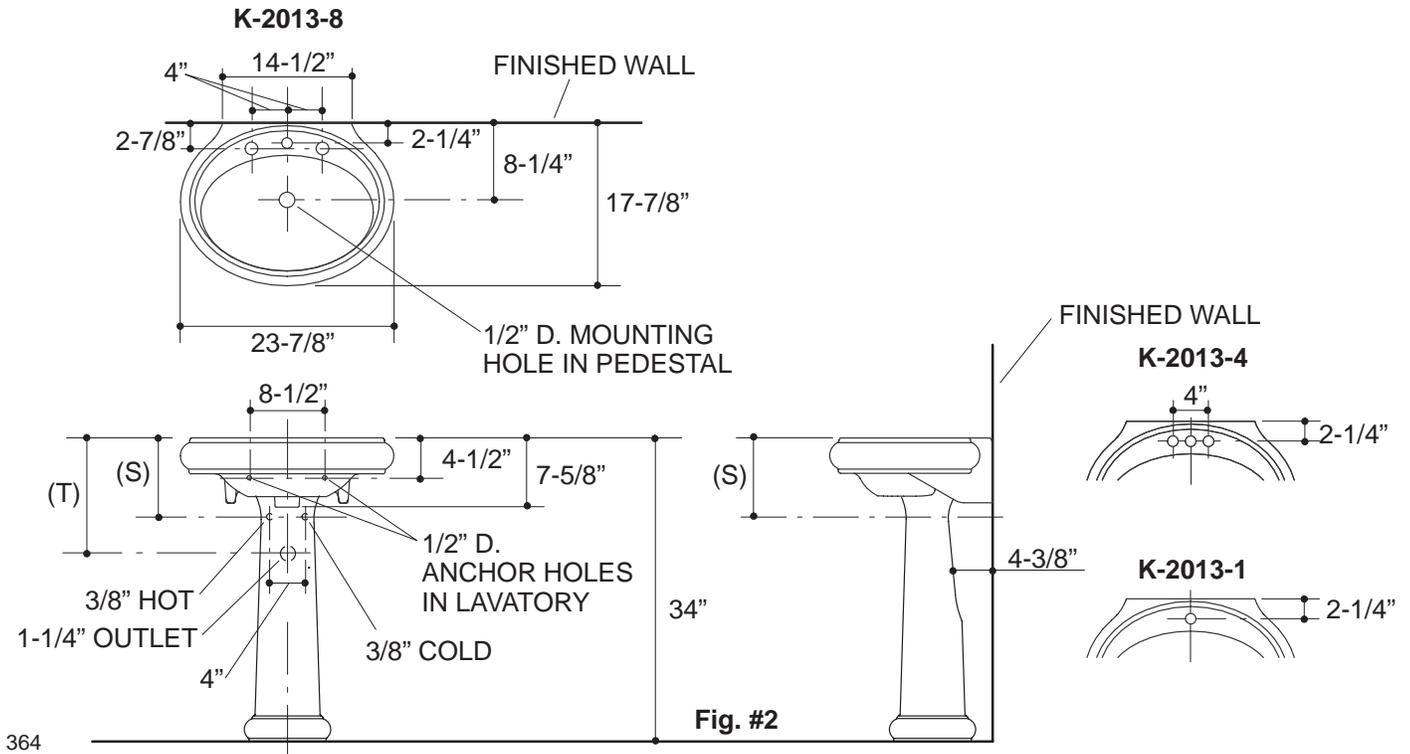

Ordering Information

Accessories/hardware:		
Supplies 3/8" (pair)	K-7605-P	recommended
Trap	K-9018	recommended

Product Information

Fixture*:		basin area	water depth
Lavatory		18" x 11"	3-3/4"
Outlet	1-3/4" D.		

* Approximate measurements for comparison only.

Holes	K-2013-8	K-2013-4	K-2013-1
Spout	1-3/16" D.	1-3/16" D.	1-3/8" D.
Faucet	1-7/16" D.	1-3/16" D.	

Included Components:	
Lavatory basin, 8" centers	K-2008-8
Lavatory basin, 4" centers	K-2008-4
Lavatory basin, single-hole	K-2008-1
Pedestal	K-2004
Rubber pads	63069
Lavatory accessory pack	84017

Roughing-In Notes

Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2M.

(T) Pop-up drain typically 13-1/4".

(S) 10" (Based on 12" riser which may require cutting).

INSTALLATION K-2011, K-2013:

Rough-in the supplies and drain piping according to the roughing-in dimensions illustrated, see Pages 2 and 3.

NOTE: Control stop handle when in full open position must not extend more than 4" from finished wall.

Install sufficient backing behind the finished wall for anchoring devices.

For K-2011: locate the pedestal mounting hole 11-3/16" from the finished wall and on the centerline of the lavatory.

NOTE: Do not drill floor anchor hole for pedestal at this time.

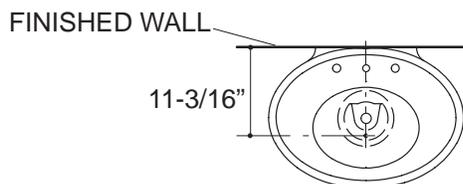


Fig. #3

For K-2013: locate the pedestal mounting hole 8-1/4" from the finished wall and on the centerline of the lavatory.

NOTE: Do not drill floor anchor hole for pedestal at this time.

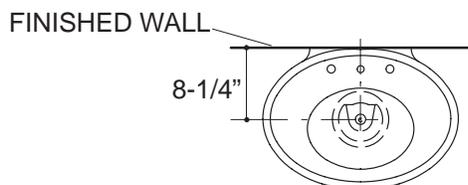


Fig. #4

For K-2011 or K-2013: apply eight of the self-adhesive gaskets (provided) on the top edge of the pedestal.

NOTE: These gaskets may need to be repositioned as necessary to improve fit.

Place pedestal on centerline in approximate location.

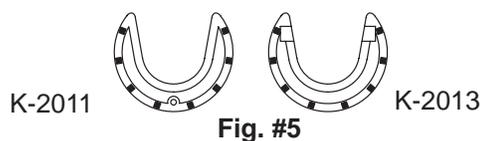


Fig. #5

Carefully place the lavatory over the pedestal.

Move the pedestal slightly as required to ensure proper fit and centering in the recess on the bottom of the lavatory.

Check the level of the lavatory.

NOTE: The lavatory must be supported by the pedestal. Make sure the lavatory is centered.

Mark the centers of the anchoring holes for the lavatory and mark a line at the front of the pedestal.

Remove the lavatory and pedestal.

Measure from the front of the bottom of the pedestal to the mounting hole. For K-2011 – use front hole; see "Y". For K-2013 – use center hole; see "X". Compare this dimension to the distance between the line on the floor and the location of the mounting hole previously marked. Relocate mounting hole if required.

Drill holes for 5/16" hanger bolts for securing lavatory and pedestal. Other fastening devices of sufficient size and strength may also be used.

Mount the hanger bolts to the wall and floor leaving approximately 1-1/4" of bolt exposed.

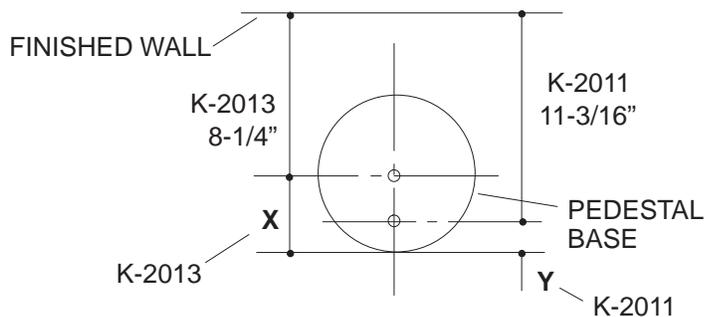


Fig. #6

Before installing the lavatory, attach the faucet and drain fittings.

RECOMMENDATION: Attach valve bodies before spout. Make sure that the 1-1/4" tailpiece is installed to the drain body. Attach U portion of P-trap to tailpiece. Refer to faucet and drain manufacturer's instructions.

NOTE: Do not fully tighten the slip-joint connection.

Set the pedestal mounting hole over the floor-mounted hanger bolt. The purpose of this hanger bolt is to prevent the pedestal from moving sideways – the pedestal does not need to be secured with a nut.

Set the lavatory back into the mounting position and level.

Install cap nuts and washers and secure the lavatory to the wall. Carefully turn nuts until contact is made with the vitreous china.

CAUTION: Risk of personal injury or product damage. Do not overtighten as breakage may result.

Connect and tighten trap.

Connect hot and cold supplies to faucet.

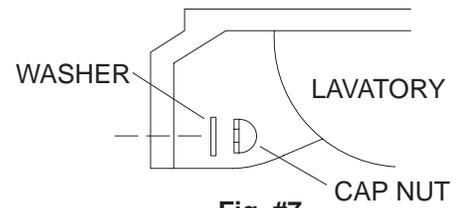


Fig. #7

IMPORTANT CONSUMER INFORMATION

A. CARE AND CLEANING

Water conditions in various parts of the country will determine any extra cleaning attention you give your or lavatory. In the meantime, a simple routine of daily care will keep your lavatory fresh and sparkling.

Kohler Co. does not recommend the use of harsh abrasive cleansers on any of its products. Harsh cleansers, when used regularly, will scratch fixture surfaces and destroy their finish.

B. REQUESTING SERVICE

Please take a moment to familiarize yourself with the Kohler Warranty, its benefits, and limitations. Kohler Co. and its distributors support you with one of the largest Service Networks of its type. Here's what you need to do if you require service:

- First:** Contact the dealer or contractor who sold and installed the product. They should be able to solve any problems you may have.
- Second:** If your dealer or contractor cannot solve the problem, they will contact or supply you with the name of the local Kohler Distributor and the:
 Kohler Technical Specialist
- Third:** If you are unable to obtain warranty service through either your contractor or Kohler Co. distributor, please write us directly at Kohler Co., Attn: Customer Service Department, 444 Highland Drive, Kohler, WI 53044 U.S.A.
- Fourth:** Include all pertinent information regarding your claim, including a complete description of the product, model numbers, colors, finishes, and the date the product was installed. Include a description of the problem, and a photocopy of your invoice for the products involved. Also give us the name of the contractor and distributor.

C. LIMITED ONE-YEAR WARRANTY

Kohler plumbing fixtures and fittings are warranted free of manufacturing defects.

Kohler Co. will, at its election repair, replace, or make appropriate adjustment where Kohler Co. inspection discloses any such defects occurring in normal usage within one year after installation. Kohler Co. is not responsible for installation costs.

To obtain warranty service, contact Kohler Co. either through your Dealer or Plumbing Contractor or by writing Kohler Co., Attn: Customer Service Department, 444 Highland Drive, Kohler, WI 53044 U.S.A., or by calling **1-800-4-KOHLER** from within the U.S.A.

Implied warranties, including that of merchantability and fitness for a particular purpose, are expressly limited in duration to the duration of this warranty. To the extent permitted by law, Kohler Co. disclaims all implied warranties including merchantability and fitness for a particular purpose. Kohler Co. disclaims any liability for special, incidental, or consequential damages.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so this limitation and exclusion may not apply to you. This warranty gives you specific legal rights. You may also have rights which vary from state to state.

This is our exclusive written warranty.

Kohler Co., Kohler, Wisconsin 53044

