

### Features


- CleanCoat™ glass coating
- Frameless design maximizes glass area
- Right or left door swing
- 3" (7.6 cm) of door width adjustment
- 1/4" (6 mm) thick tempered safety glass door
- 3/8" (1 cm) thick tempered safety glass stationary panel for stability
- Installs on fiberglass, acrylic, or custom tiled applications
- Solid brass door handle
- 72" (182.9 cm) height

### Codes/Standards Applicable

- Specified model meets or exceeds the following:
- ANSI Z97.1 (tempered glass)

## PIVOT SHOWER DOORS K-702010

ALSO K-702011, K-702012, K-702013

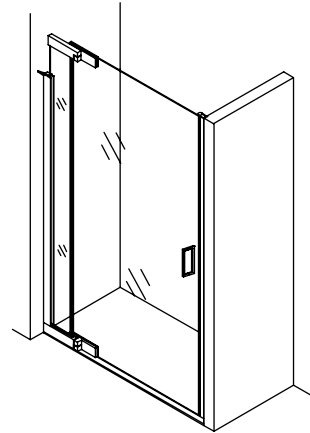

### Colors/Finishes

- BN: Brushed Nickel
- SH: Bright Silver

### Glass Options

- D3: Frosted
- L: Clear

### Specified Model

Model	Description	Glass Options		Colors/ Finishes	
*K-702010	Pivot shower door	D3	L	BN	SH
K-702011	Pivot shower door	D3	L	BN	SH
K-702012	Pivot shower door	D3	L	BN	SH
*K-702013	Pivot shower door	D3	L	BN	SH
* Stock doors					


### Product Specification

The pivot shower door shall be 72" (182.9 cm) height with 3" (7.6 cm) of door width adjustment and CleanCoat™ glass coating. The shower door shall feature a frameless design to maximize the glass area with 1/4" (6 mm) thick tempered safety glass door, and 3/8" (1 cm) tempered safety glass stationary panel for stability. The shower door shall install on fiberglass, acrylic, or custom tiled applications with a right or left door swing. The shower door shall feature a solid brass door handle. The shower door shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_.

# PURIST®


## Installation Notes

Install this product according to the installation guide.

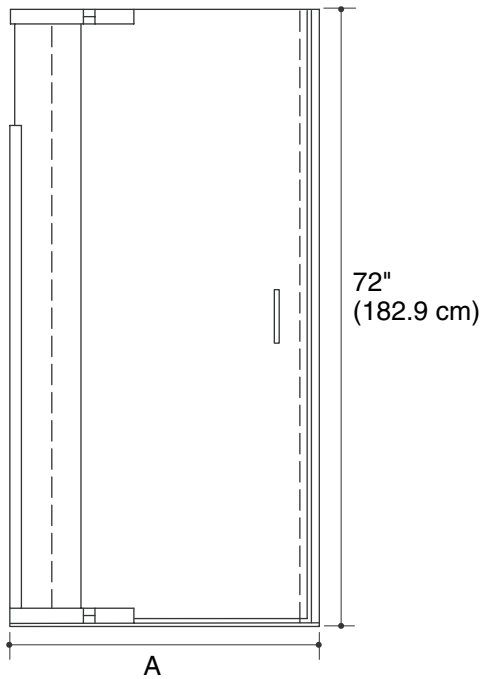

	A	B
K-702010	30" (76.2 cm) 33" (83.8 cm)	20-5/16" (51.6 cm) Min 23-15/16" (60.8 cm) Max
K-702011	33" (83.8 cm) 36" (91.4 cm)	23-5/16" (59.2 cm) Min 26-15/16" (68.4 cm) Max
K-702012	36" (91.4 cm) 39" (99.1 cm)	26-5/16" (66.8 cm) Min 29-15/16" (76 cm) Max
K-702013	39" (99.1 cm) 42" (106.7 cm)	29-5/16" (74.5 cm) Min 32-15/16" (83.7 cm) Max

Note: A minimum of 1-1/2" (3.8 cm) open area above the height of the door, 72" (182.9 cm), is required for side panel and door installation.

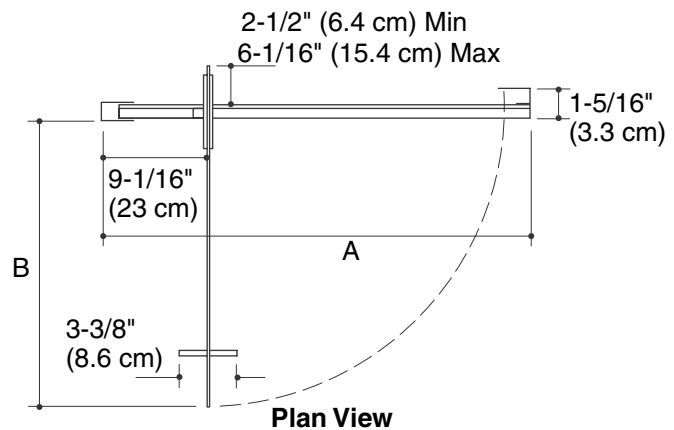

## Product Diagram