

Features

- Brass construction
- For 5-1/2" (14 cm) centers
- Brass valve bodies
- Valvet_® valves
- 1-1/4" (3.2 cm) spout
- Available with standard or vandal-resistant Water-Guard_® aerator
- Pop-up drain with lift rod and tailpiece
- Variety of handle style options
- 2.0 gallons (7.6 L) per minute


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992
- IAPMO/cUPC
- ADA
- NSF 61

Specified Model





Colors/Finishes

CP: Polished Chrome

Model	Description	Qo	ADA	ADA	ADA	Ŵ
K-8040-2A	Shelf-back lavatory faucet with standard handles and standard aerator	□ CP				
K-8040-2E	Shelf-back lavatory faucet with standard handles and vandal-resistant aerator	□ CP				
K-8040-3A	Shelf-back lavatory faucet with cross handles and standard aerator		□ CP			
K-8040-3E	Shelf-back lavatory faucet with cross handles and vandal-resistant aerator		□ CP			
K-8040-4A	Shelf-back lavatory faucet with lever handles and standard aerator			□ CP		
K-8040-4E	Shelf-back lavatory faucet with lever handles and vandal-resistant aerator			□ CP		

Product Specification


Shelf-back lavatory faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall also feature Valvet valves. Product shall include 5-1/2" (14 cm) centers, 1-1/4" (3.2 cm) spout, pop-up drain with lift rod and tailpiece, and handles. Optional feature shall be standard or vandal-resistant Water-Guard aerator. Faucet shall be 2.0 gallons (7.6 L) per minute. Faucet shall be Kohler Model K-____-CP.

TRITON®

Model	Description	Qo	ADA	ADA	Ô¢
K-8040-5A	Shelf-back lavatory faucet with wristblade handles and standard aerator			□ CP	
K-8040-5E	Shelf-back lavatory faucet with wristblade handles and vandal-resistant aerator			□ CP	
K-8042	Shelf-back lavatory faucet with self-closing handles and standard aerator				□ CP

Installation Notes

Install this product according to the installation guide.

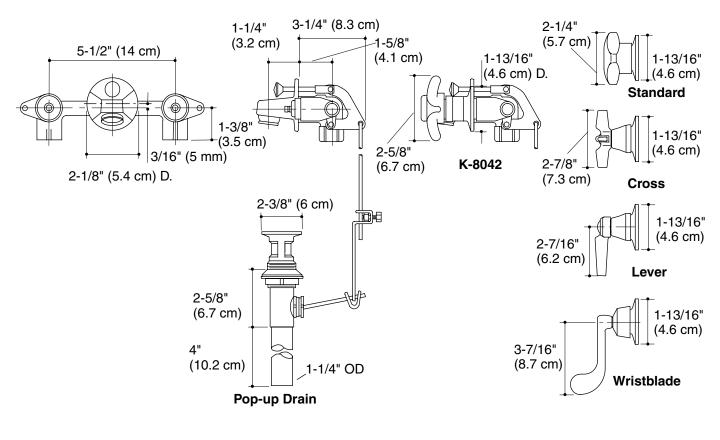

Product Diagram

