

Features

- Metal construction
- Wall-mount installation with slip-fit connection and NPT threads


WALL-MOUNT BATH SPOUT

K-5327
ALSO K-5328

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

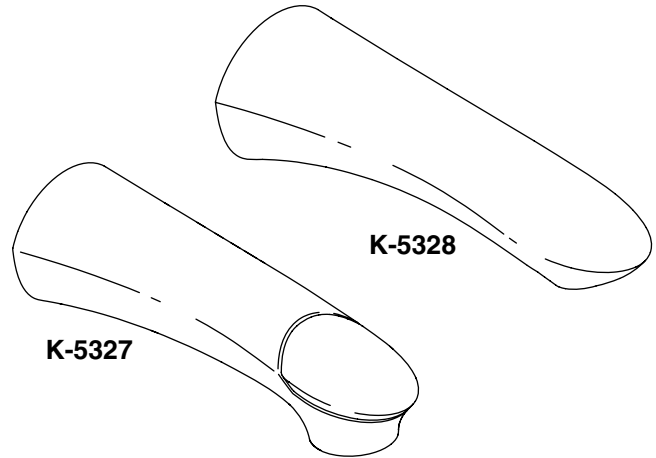

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Color/Finish	
		<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-5327	Wall-mount bath spout with diverter	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-5328	Wall-mount bath spout less diverter	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

Product Specification


Product shall be of metal construction. Product shall be a wall-mount bath spout with slip-fit connection and NPT threads. Bath spout shall be K-_____-_____.

Installation Notes

Install this product according to the installation guide.


For slip-fit spout, 5/8" OD tube must extend 5-9/16" (14.1 cm) beyond finished wall.

For threaded spout, 1/2" NPT pipe must extend 5-9/16" (14.1 cm) beyond finished wall.




K-5327

Water supply tube must be centered with the hole.

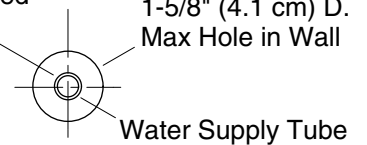


For slip-fit spout, 5/8" OD tube must extend 5-1/16" (12.9 cm) beyond finished wall.

For threaded spout, 1/2" NPT pipe must extend 5-1/16" (12.9 cm) beyond finished wall.



K-5328

Water supply tube must be centered with the hole.

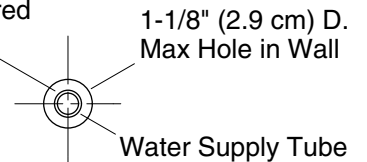

Product Diagram