

Features


- Integrated chromatherapy in solid colors, color dial, and preprogrammed color effects
- Available 54- or 22-nozzle configurations
- 2.2 gallons (8.3 L) per minute maximum flow rate from each sprayhead [at 80 psi (552 kPa)]
- 1/2" NPT connections

WATERTILE® OVERHEAD RAIN SHOWER
K-8034
ALSO K-8038

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- Energy Policy Act of 1992

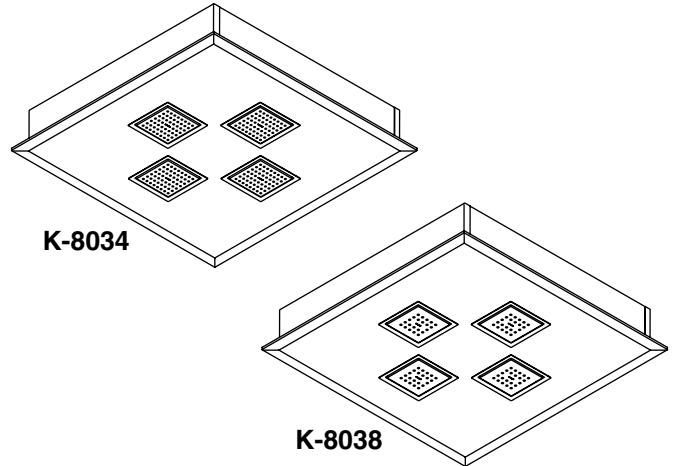

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-8034	54-nozzle overhead rain shower with chroma lighting	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-8038	22-nozzle overhead rain shower with chroma lighting	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Required Accessories				
K-638	Media module			<input type="checkbox"/> NA
K-694	Landscape digital interface OR	<input type="checkbox"/> 1CP	<input type="checkbox"/> 1SN	<input type="checkbox"/> 1AF
K-695	Portrait digital interface	<input type="checkbox"/> 1CP	<input type="checkbox"/> 1SN	<input type="checkbox"/> 1AF

Optional Accessories				
K-657	Landscape auxiliary digital interface OR	<input type="checkbox"/> 1CP	<input type="checkbox"/> 1SN	<input type="checkbox"/> 1AF
K-658	Portrait auxiliary digital interface	<input type="checkbox"/> 1CP	<input type="checkbox"/> 1SN	<input type="checkbox"/> 1AF
K-682-K	Digital mixing valve			<input type="checkbox"/> NA

Product Specification

The overhead rain shower shall feature integrated chromatherapy in solid colors, color dial, and preprogrammed color effects. The rain shower shall be available with either 54- or 22- nozzles for each sprayhead. The rain shower shall have 1/2" NPT connections and the flow rate shall be 2.2 gallons (8.3 L) per minute maximum at 80 psi (552 kPa) for each sprayhead. The overhead rain shower shall be Kohler Model K-____-____.

AMBIENT RAIN™

Technical Information

Cutout dimensions:
20-1/4" (51.4 cm) to 20-1/2" (52.1 cm) x
20-1/4" (51.4 cm) to 20-1/2" (52.1 cm)


Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Locate a 120 V outlet within close proximity to the overhead rain shower.

Installation Notes

Install this product according to the installation guide.

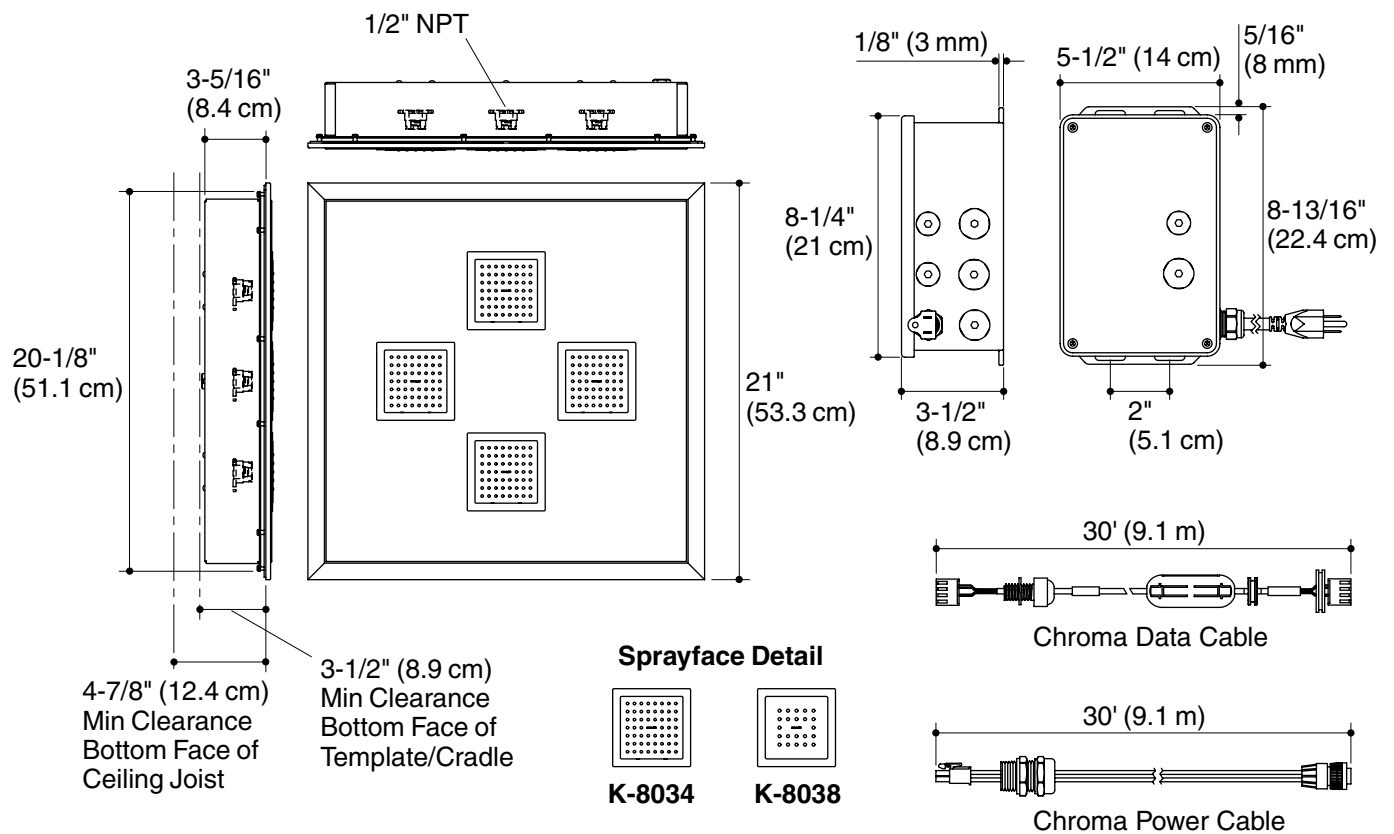

Product Diagram