

IRON WORKS TELLIEUR™

BATH WITH WOOD BATH SURROUND

FEATURES

- 66" (167.6cm) x 36" (91.4cm) x 24-1/2" (62.2cm) (height with surround)
- Cast iron with Safeguard® finish
- Hard select maple and veneers

K-727



CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

• ASME/ANSI A112.19.1M

COLORS/FINISHES

Cast Iron Bath:

- 0 White
- 47 Almond
- 96 **Biscuit**
- Refer to Fixtures Price Book for additional colors Other

Accessories:

- CP Polished Chrome
- PB Polished Brass
- Refer to Faucets Price Book for additional finishes Other

SPECIFIED MODEL:

Model	Description		Colors/Finishes			
K-727-1A	Almond exterior bath and Sunwash surround		□47 Almond			
K-727-1B	Biscuit exterior bath and Sunwash surround		□96 Biscuit			
K-727-1S	Sandbar exterior bath and Sunwash surround	□0 White	[□Other		
K-727-1W	White exterior bath and Sunwash surround	□0 White	[□Other		
K-727-2A	Almond exterior bath and Black Forest surround		□47 Almond			
K-727-2B	Biscuit exterior bath and Black Forest surround		□96 Biscuit			
K-727-2S	Sandbar exterior bath and Black Forest surround	□0 White	[□Other		
K-727-2W	White exterior bath and Black Forest surround	□0 White	□0 White □Other			
Recommend	ed Accessories	<u> </u>	<u> </u>	<u> </u>		
K-7178	Drain OR	□СР	□РВ	□Other		

Recommended Accessories							
K-7178	Drain OR	□СР	□PB	□Other			
K-7104	Drain for use with Antique™ or IV Georges Brass™ faucet	□СР	□РВ	□Other			

PRODUCT SPECIFICATION:

The bath with wood surround shall be 66" (167.6cm) in length, 36" (91.4cm) in width, and 24-1/2" (62.2cm) in height. Bath shall be made of cast iron with Safeguard® finish. Wood bath surround shall be made of select hard maple and veneers. Bath and wood surround shall be Kohler Model K-727-


IRON WORKS TELLIEUR™

PRODUCT INFORMATION

Fixture*:	basin area	top area	weight		
Bathing well	47-1/2" (120.7cm) x 25" (63.5cm)	55" (139.7cm) x 29" (73.7cm)	410 lbs. (186 kg)		
	water depth	capacity			
To overflow	12-5/8" (32.1cm)	64 gals. (242.2L)			
* Approximate measurements for comparison only					

INSTALLATION NOTES

NOTICE: Unless otherwise specified, floor support under bath must provide for a minimum of 80 lbs./square foot (390 Kg./square meter) loading.

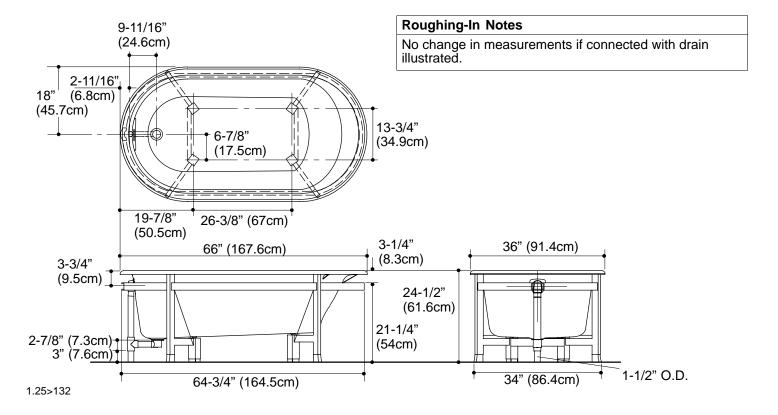

PRODUCT DIAGRAM

